



## LOAD BREAK SWITCHES 16-125 A TOGGLE SWITCHES, KUE SERIES



- Compact size
- DIN-rail mounting
- 3-pole
- Switch technology by means of silver contacts ensures safe and durable operation
- Available with adapter to connect the switch to a three-phase section rail. Three different connection heights
- Available with yellow front plate and red toggle add "Y/R" at the end of the product code when ordering

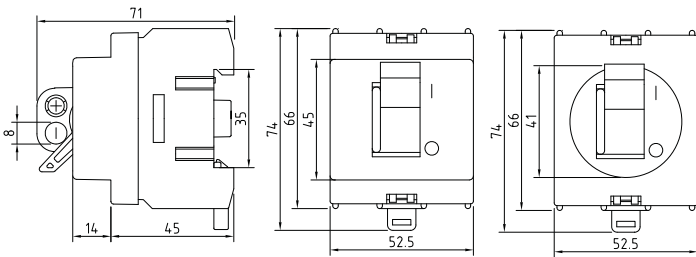

### Adapter dimensions

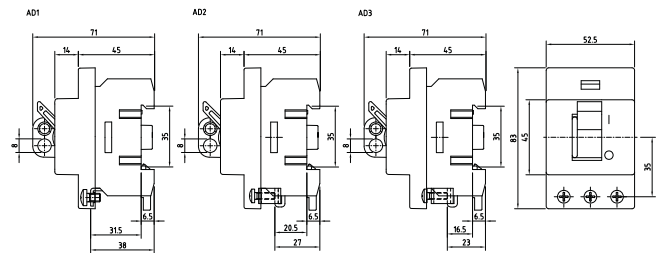

Type	AC-21		AC-22		AC-23		EAN-Code	Weight kg	
	400 V	415 V	400 V	415 V <sup>1)</sup>	400 V	415 V			
	I <sub>e</sub> / A	690 V	I <sub>e</sub> / A	690 V <sup>2)</sup>	I <sub>e</sub> / A	P / kW	P / kW		
KUE 316	25 A		16 A		16 A	7,5 kW	11 kW	6419410200308	0.17
KUE 325	40 A		25 A		25 A	11 kW	15 kW	6419410200407	0.17
KUE 340	63 A		40 A		25 A	11 kW	15 kW	6419410200506	0.17
KUE 363	80 A		63 A		40 A	22 kW	30 kW	6419410200605	0.18
KUE 380	100 A		80 A		63 A	30 kW	30 kW	6419410200704	0.18
KUE 3125	125 A		125 <sup>1)</sup> / 80 <sup>2)</sup> A		63 A	30 kW	30 kW	6419410200902	0.18
KUE 316 + AD1 + K/KUE	25 A		16 A		16 A	7,5 kW	11 kW	6419410200322	0.21
KUE 325 + AD1 + K/KUE	40 A		25 A		25 A	11 kW	15 kW	6419410200421	0.21
KUE 340 + AD1 + K/KUE	63 A		40 A		25 A	11 kW	15 kW	6419410200520	0.21
KUE 363 + AD1 + K/KUE	80 A		63 A		40 A	22 kW	30 kW	6419410200629	0.22
KUE 380 + AD1 + K/KUE	100 A		80 A		63 A	30 kW	30 kW	6419410200728	0.22
KUE 3125 + AD1 + K/KUE	125 A		125 <sup>1)</sup> / 80 <sup>2)</sup> A		63 A	30 kW	30 kW	6419410200834	0.22
KUE 316 + AD2 + K/KUE	25 A		16 A		16 A	7,5 kW	11 kW	6419410200339	0.21
KUE 325 + AD2 + K/KUE	40 A		25 A		25 A	11 kW	15 kW	6419410200438	0.21
KUE 340 + AD2 + K/KUE	63 A		40 A		25 A	11 kW	15 kW	6419410200537	0.21
KUE 363 + AD2 + K/KUE	80 A		63 A		40 A	22 kW	30 kW	6419410200636	0.22
KUE 380 + AD2 + K/KUE	100 A		80 A		63 A	30 kW	30 kW	6419410200735	0.22
KUE 3125 + AD2 + K/KUE	125 A		125 <sup>1)</sup> / 80 <sup>2)</sup> A		63 A	30 kW	30 kW	6419410200841	0.22
KUE 316 + AD3 + K/KUE	25 A		16 A		16 A	7,5 kW	11 kW	6419410200346	0.21
KUE 325 + AD3 + K/KUE	40 A		25 A		25 A	11 kW	15 kW	6419410200445	0.21
KUE 340 + AD3 + K/KUE	63 A		40 A		25 A	11 kW	15 kW	6419410200810	0.21
KUE 363 + AD3 + K/KUE	80 A		63 A		40 A	22 kW	30 kW	6419410200643	0.22
KUE 380 + AD3 + K/KUE	100 A		80 A		63 A	30 kW	30 kW	6419410200827	0.22
KUE 3125 + AD3 + K/KUE	125 A		125 <sup>1)</sup> / 80 <sup>2)</sup> A		63 A	30 kW	30 kW	6419410200858	0.22

#### ADDITIONAL FRONT PLATES

K/KUE	Rectangular front plate	6419410221808	0.02
R/KUE	Round front plate	6419410221907	0.02
K/KUE AD	Long front plate	6419410221815	0.02