


Relays with Fuse

Relay con Fusibile

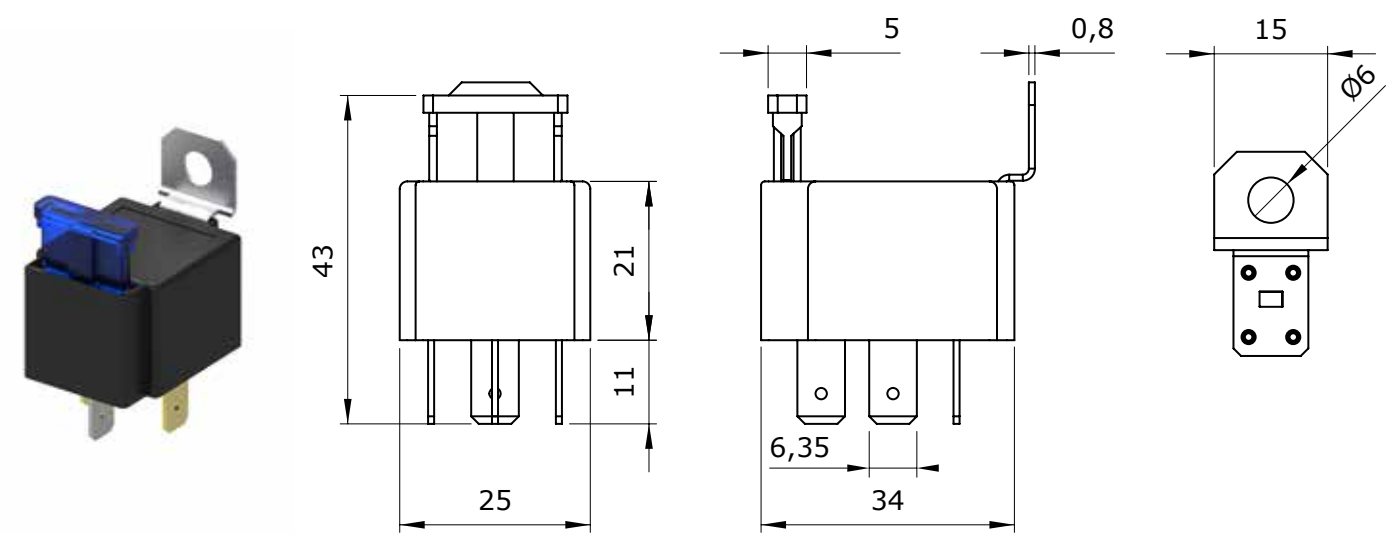

Plug-in automotive relay for 12V or 24V system and rated current up to 30A.

Designed to accommodate regular blade fuses and available in make contact structure with coil transient suppression diode or resistor.

The relay feature also two mounting options, and terminals footprint designed according to ISO 7588-1 to fit into a standard relay socket.

Relay automobilistico con terminali plug-in per sistema a 12V o 24V e corrente nominale fino a 30A.

Progettato per ospitare fusibili regolari per auto e disponibile con contatti in configurazione normalmente aperto e con diodo o resistenza di soppressione.

Il relay dispone inoltre di 2 opzioni di fissaggio, ed un passo dei terminali progettato in accordo allo standard ISO 7588-1 compatibile con un supporto automobilistico per relay standard.

12V

OUR CODE	DESCRIPTION	PINS	A	V	ADDITIONAL INFORMATION	CONNECTION	DIAGRAM
1F.204.101.15	RELAY WITH FUSE NORMALLY OPEN RELAY CON FUSIBILE NORMALMENTE APERTO	4	15	12	Without bracket Senza staffa		
1F.204.101.30	RELAY WITH FUSE NORMALLY OPEN RELAY CON FUSIBILE NORMALMENTE APERTO	4	30	12	Without bracket Senza staffa		

24V

OUR CODE	DESCRIPTION	PINS	A	V	ADDITIONAL INFORMATION	CONNECTION	DIAGRAM
1F.404.101.15	RELAY WITH FUSE NORMALLY OPEN RELAY CON FUSIBILE NORMALMENTE APERTO	4	15	24	Without bracket Senza staffa		
1F.404.101.20	RELAY WITH FUSE NORMALLY OPEN RELAY CON FUSIBILE NORMALMENTE APERTO	4	20	24	Without bracket Senza staffa		