



Control Transformers Specifications

- High permeable iron core
- High quality copper or aluminium windings
- Class I transformer
- Excellent voltage regulation
- High short time power
- Vacuum impregnated varnish to ensure silent and moisture-immune operation
- CE sign and compatibility with EN 61558 2-2
- Manufactured under ISO 9000 quality management

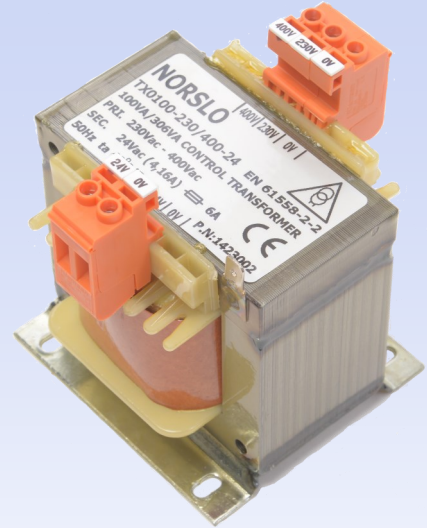

Model	Power (VA)	Primary Voltage (V)	Secondary Voltage (V)	Efficiency (%)	Instantaneous Power (VA)
TX0050-230/400-24	50	230 / 400	24	79.51	96
TX0050-230/400-110	50	230 / 400	110	79.36	101
TX0100-230/400-24	100	230 / 400	24	83.25	212
TX0100-230/400-110	100	230 / 400	110	83.51	215
TX0150-230/400-24	150	230 / 400	24	86.03	346
TX0150-230/400-110	150	230 / 400	110	86.35	338
TX0200-230/400-24	200	230 / 400	24	87.71	455
TX0200-230/400-110	200	230 / 400	110	86.82	441
TX0250-230/400-24	250	230 / 400	24	87.91	588
TX0250-230/400-110	250	230 / 400	110	87.66	571
TX0300-230/400-24	300	230 / 400	24	89.64	724
TX0300-230/400-110	300	230 / 400	110	88.83	745
TX0500-230/400-24	500	230 / 400	24	90.7	1209
TX0500-230/400-110	500	230 / 400	110	90.87	1274
TX0750-230/400-24	750	230 / 400	24	91.74	1990
TX0750-230/400-110	750	230 / 400	110	92.37	2108
TX1000-230/400-24	1000	230 / 400	24	92.41	2609
TX1000-230/400-110	1000	230 / 400	110	92.89	2765
TX1500-230/400-24	1500	230 / 400	24	93.53	4977
TX1500-230/400-110	1500	230 / 400	110	93.48	4752
TX2000-230/400-24	2000	230 / 400	24	94.18	6303
TX2000-230/400-110	2000	230 / 400	110	94.41	6053

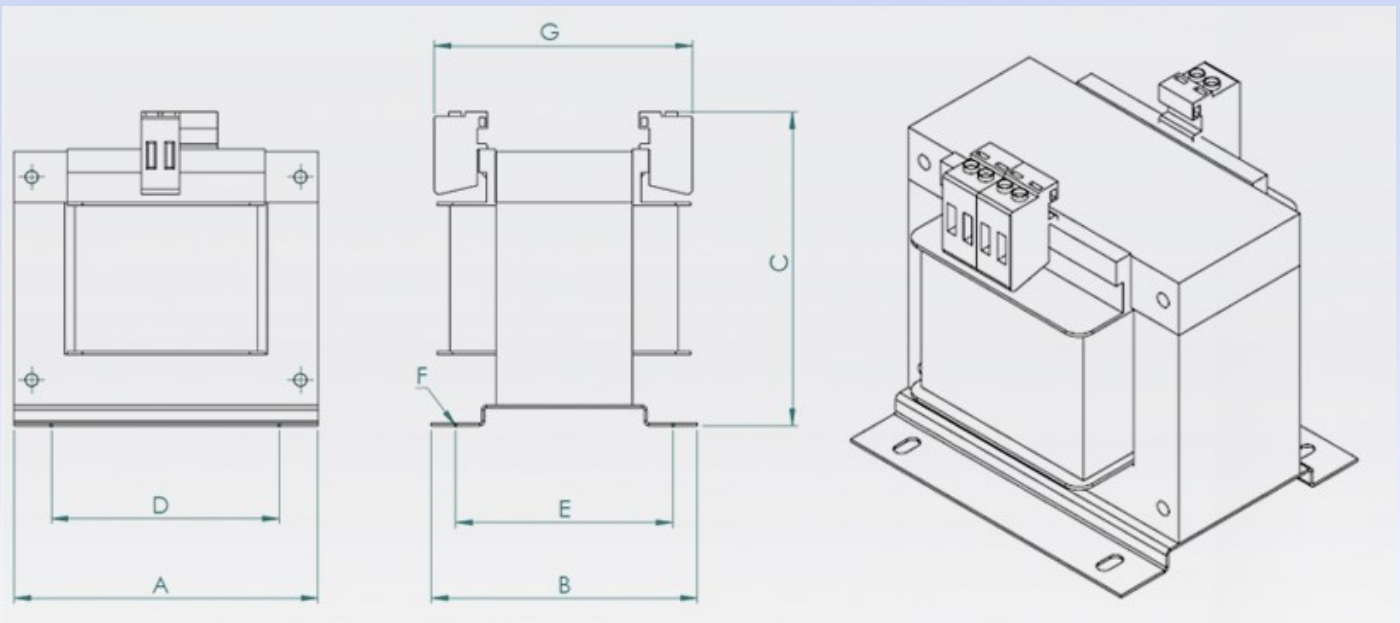

Model	Power (VA)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	H(mm)	Weight (Kg)
TX0050-230/400-24	50	84	91	64	76	64	55	100	1.5
TX0050-230/400-110	50	84	91	64	76	64	79	100	1.5
TX0100-230/400-24	100	84	91	64	76	64	79	100	1.9
TX0100-230/400-110	100	84	91	64	76	64	79	100	2.0
TX0150-230/400-24	150	96	99	74	89	84	75	107	2.4
TX0150-230/400-110	150	96	99	74	89	84	75	107	2.5
TX0200-230/400-24	200	96	99	74	89	84	75	107	3
TX0200-230/400-110	200	96	99	74	89	84	75	107	2.9
TX0250-230/400-24	250	96	99	87	102	84	89	107	3.4
TX0250-230/400-110	250	96	99	87	102	84	89	107	3.5
TX0300-230/400-24	300	120	127	83	90	90	85	135	4.5
TX0300-230/400-110	300	120	127	83	90	90	85	135	4.7
TX0500-230/400-24	500	120	127	109	122	90	111	135	6.7
TX0500-230/400-110	500	120	127	109	122	90	111	135	6.8
TX0750-230/400-24	750	150	129	141	122	104	105	150	10.3
TX0750-230/400-110	750	150	129	141	122	104	105	150	9.7
TX1000-230/400-24	1000	150	153	141	122	128	130	150	14.4
TX1000-230/400-110	1000	150	153	141	122	128	130	150	14.7
TX1500-230/400-24	1500	192	166	200	130	148	150	208	24.2
TX1500-230/400-110	1500	192	166	200	130	148	150	208	22.9
TX2000-230/400-24	2000	192	178	200	130	160	162	208	26.8
TX2000-230/400-110	2000	192	178	200	130	160	162	208	25.6