


CABLE CONNECTORS




- Suitable for 1.5-240 mm² Al/Cu cables:
- Material: tin-coated aluminium
- In accordance with VDE 0220 part 1/11.71 and 2/11.71,
- SEN 24 50 12, SFS 2663 and IEC 61238-1
- Environmentally friendly materials


KKL 1x16

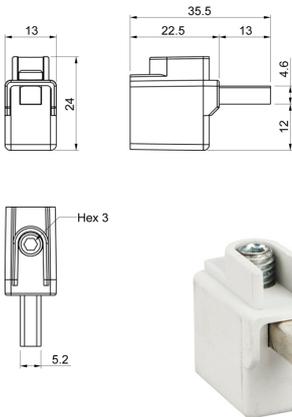


KKL 1x50T1

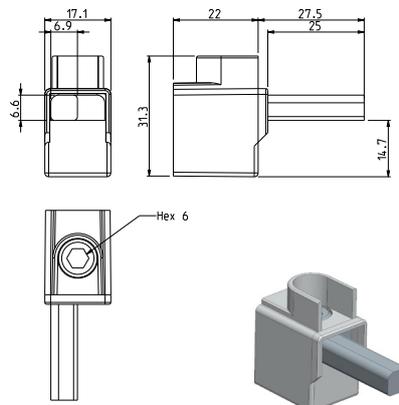


KKL 1x50T2

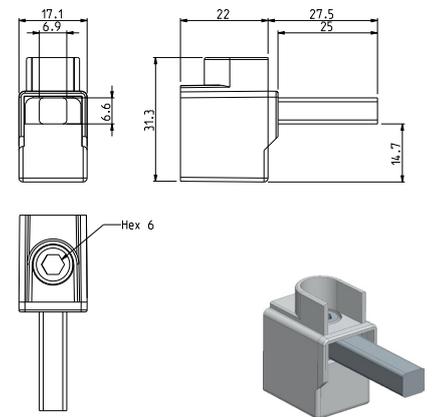


KKL 2x50T3

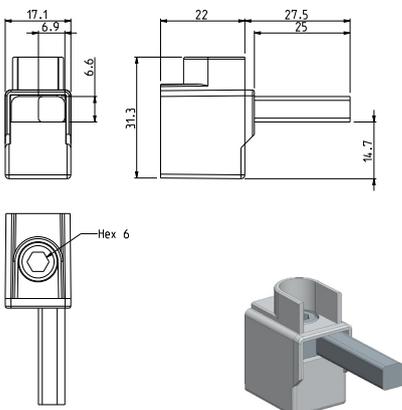


KKL 1x50M

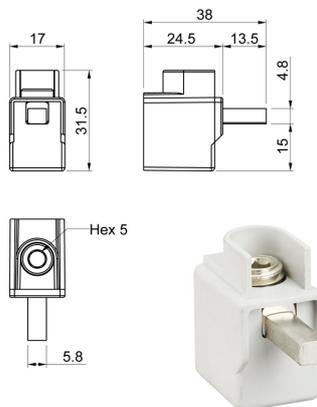


KKL 2x50M

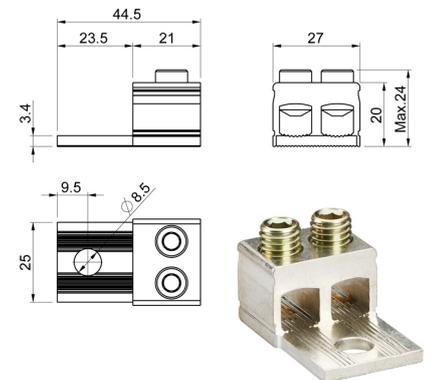


KKL 1x50N

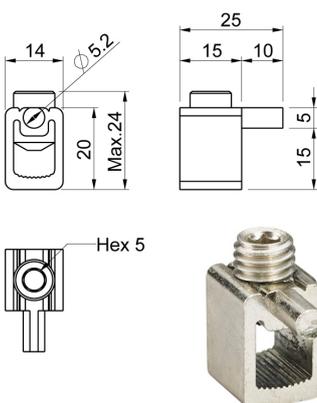

KKL 1x50

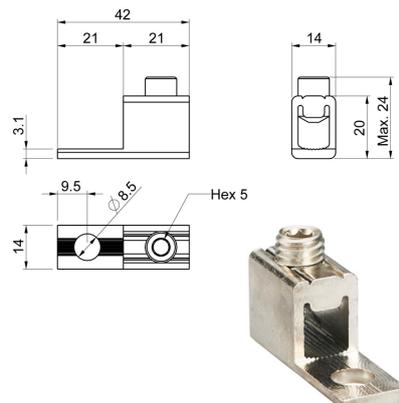


KKL 2x50

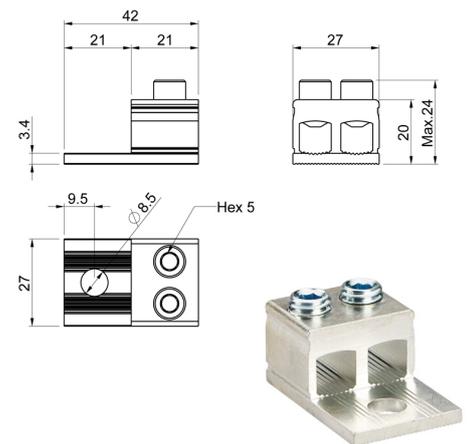


Data subject to change without notice

CABLE CONNECTORS


KKL 1x95

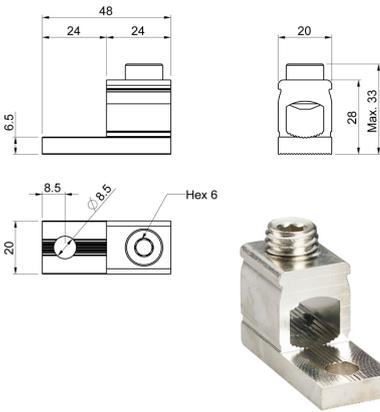


KKL 2x95

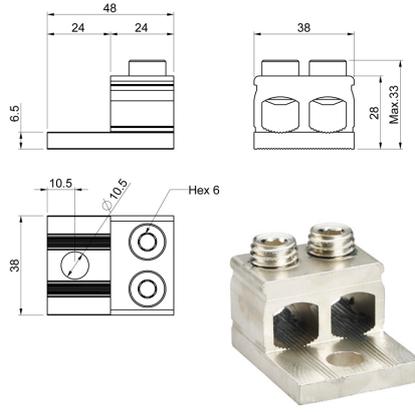


KKL 1x120T1

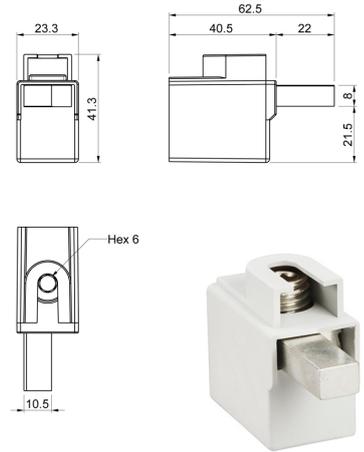


KKL 1x120T2

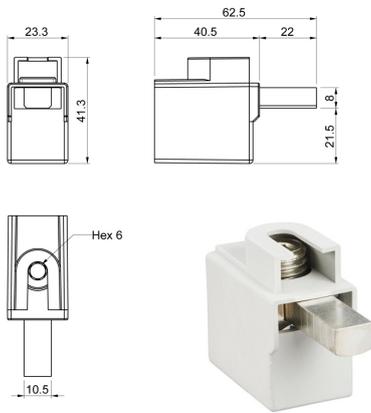


KKL 1x120T3

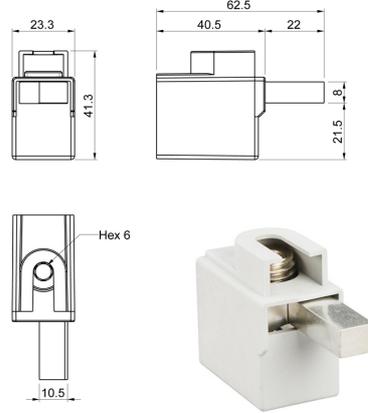


KKL 1x120TM

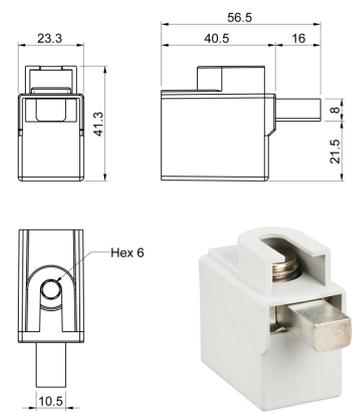


KKL 1x120RS

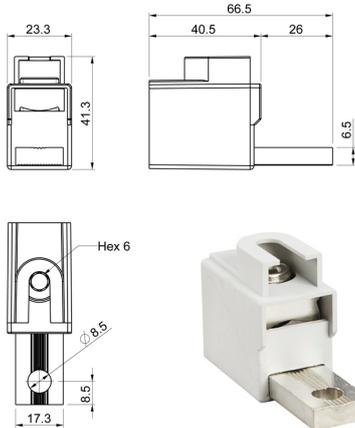

KKL 1x120RSY

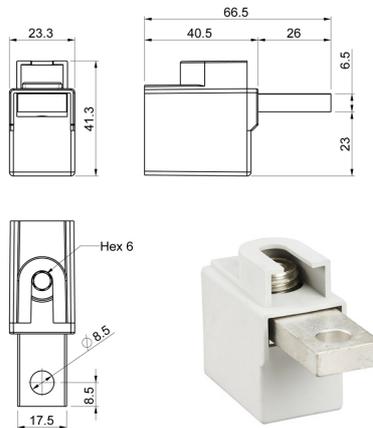

KKL 1x120T

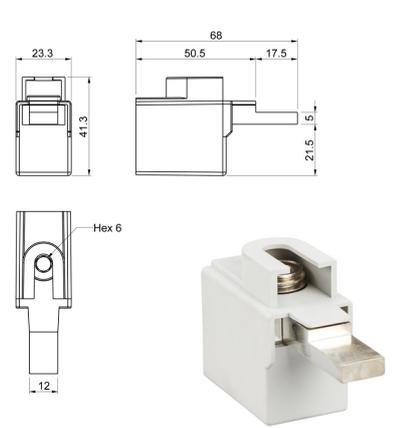


Type	Un (V)	In (Al) (A)	In (Cu) (A)	Al mm ²	Cu mm ²	Torque Al/Cu (Nm)	Number of conductors	Allen key size	Mounting	EAN code 6419410...	Weight kg
KKL 1X16	690	63	63	1,5-16	1,5-16	2,2 [1,5-16mm ²]	1	Hex 3	Direct	...378496	0.01
KKL 1X50T.1	690	125	125	16-50	2,5-50	5 [2,5-16mm ²] / 10 [25-50mm ²]	1	Hex 5	Direct	...378717	0.019
KKL 1X50T.2	690	125	125	16-50	2,5-50	5 [2,5-16mm ²] / 10 [25-50mm ²]	1	Hex 5	Direct	...378502	0.019
KKL 1x50T.3	690	125	125	16-50	2,5-50	5 [2,5-16mm ²] / 10 [25-50mm ²]	1	Hex 5	Direct	...378724	0.019
KKL 1X50M	690	125	125	16-50	2,5-50	5 [2,5-16mm ²] / 10 [25-50mm ²]	1	Hex 5	Direct	...378519	0.017
KKL 1X50N	690	125	125	16-50	2,5-50	5 [2,5-16mm ²] / 10 [25-50mm ²]	1	Hex 5	Direct	...378670	0.014
KKL 1X50	690	160	160	16-50	2,5-50	5 [2,5-16mm ²] / 10 [25-50mm ²]	1	Hex 5	Bolt	...378571	0.011
KKL 2X50	690	200	320	16-50	16-50	5 [2,5-16mm ²] / 10 [25-50mm ²]	2	Hex 5	Bolt M8	...378588	0.023
KKL 2X50M	690	200	320	16-50	16-50	5 [2,5-16mm ²] / 10 [25-50mm ²]	2	Hex 5	Bolt M8	...378663	0.023
KKL 1X95	690	200	245	25-95	25-95	12 [16-50 mm ²] / 22 [70-95 mm ²]	1	Hex 6	Bolt M8	...378595	0.03
KKL 2X95	690	400	490	25-95	25-95	12 [16-50 mm ²] / 22 [70-95 mm ²]	2	Hex 6	Bolt M10	...378601	0.061
KKL 1X120T.1	690	200	245	16-120	16-120	12 [16-50 mm ²] / 22 [70-120 mm ²]	1	Hex 6	Direct	...378526	0.037
KKL 1X120T.2	690	200	245	16-120	16-120	12 [16-50 mm ²] / 22 [70-120 mm ²]	1	Hex 6	Direct	...378533	0.037
KKL 1X120T.3	690	200	245	16-120	16-120	12 [16-50 mm ²] / 22 [70-120 mm ²]	1	Hex 6	Direct	...378540	0.037
KKL 1X120T	690	200	245	16-120	16-120	12 [16-50 mm ²] / 22 [70-120 mm ²]	1	Hex 6	Direct	...378700	0.037
KKL 1X120TM	690	200	245	16-120	16-120	12 [16-50 mm ²] / 22 [70-120 mm ²]	1	Hex 6	Direct	...378557	0.037
KKL 1X120RS	690	200	245	16-120	16-120	12 [16-50 mm ²] / 22 [70-120 mm ²]	1	Hex 6	Bolt M8	...378687	0.044
KKL 1X120RSY	690	200	245	16-120	16-120	12 [16-50 mm ²] / 22 [70-120 mm ²]	1	Hex 6	Bolt M8	...378694	0.044


Data subject to change without notice

CABLE CONNECTORS


KKL 1x150

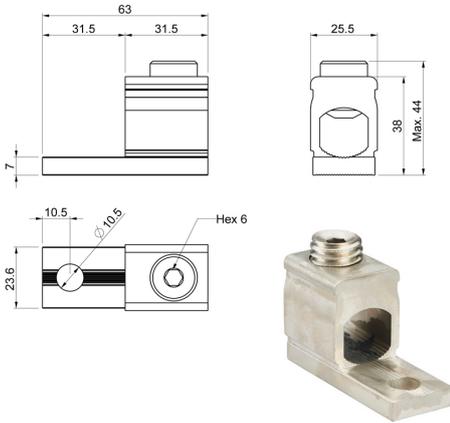


KKL 2x150

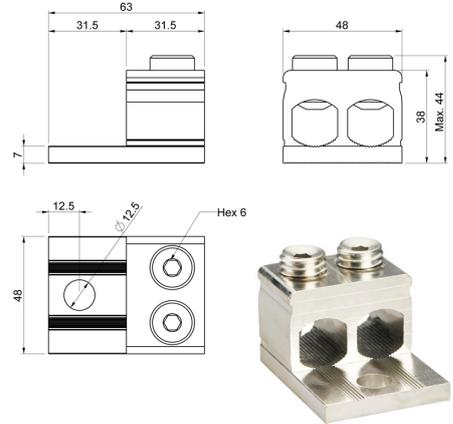


KKL 1x240

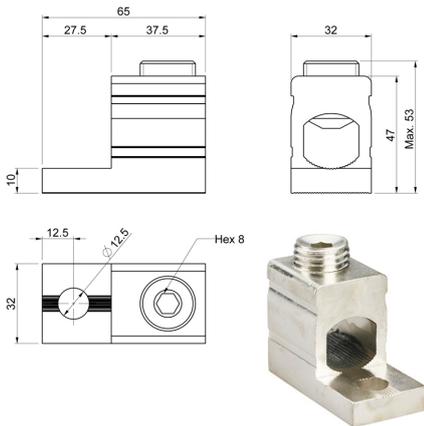


KKL 2x240

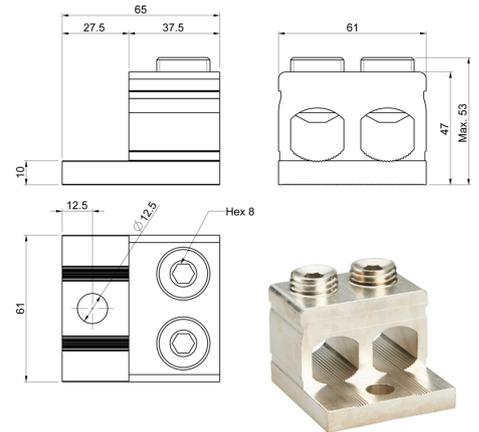

KKL 1x240TE

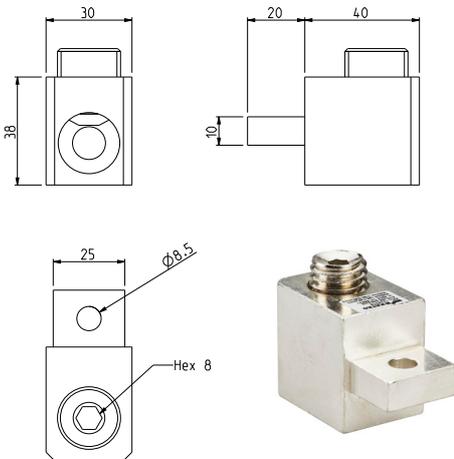

KKL 1x240TM

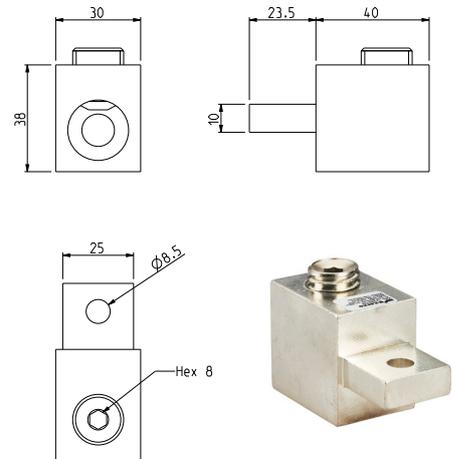

Type	Un (V)	In (Al) (A)	In (Cu) (A)	Al mm ²	Cu mm ²	Torque Al/Cu (Nm)	Number of conductors	Allen key size	Mounting	EAN code 6419410...	Weight kg
KKL 1X150	690	250	320	25-150	25-150	12 [25-50 mm ²] / 22 [70-95 mm ²] / 38 [120-150 mm ²]	1	Hex 6	Bolt M10	...378618	0.073
KKL 2X150	690	500	640	25-150	25-150	12 [25-50 mm ²] / 22 [70-95 mm ²] / 38 [120-150 mm ²]	2	Hex 6	Bolt M12	...378625	0.15
KKL 1X240	690	315	425	35-240	35-240	25 [35-120 mm ²] / 55 [150-240 mm ²]	1	Hex 8	Bolt M12	...378632	0.113
KKL 2X240	690	630	850	35-240	35-240	25 [35-120 mm ²] / 55 [150-240 mm ²]	2	Hex 8	Bolt M12	...378649	0.245
KKL 1X240TM	690	400	425	35-240	35-240	25 [35-120 mm ²] / 40 [150-240 mm ²]	1	Hex 8	Bolt M12	...378656	0.113
KKL 1X240TE	690	400	400	35-240	35-240	25 [35-120 mm ²] / 40 [150-240 mm ²]	1	Hex 8	Bolt M12	...378731	0.113

Data subject to change without notice