


SIDE OPERATED SWITCHES POLYCARBONATE ENCLOSED 16-40 A



- Available in grey/black, yellow/red or fireman red
- Good resistance against UV and many chemicals
- Self-extinguishing material and excellent insulating properties
- Fully rated Load Break Switch breaking capacity of 8 x AC23 rating
- Cable entries 2 x M20/M25 as standard on the top and bottom and M20 on the base
- Mounting holes: 118,0 x 84,0
- Padlockable handle in 0-position and also available in 1-position
- Knock-out glands are easy to open
- Large cable terminals 1,5 - 16 mm²
- IP66
- Auxiliary contact (normally open, NO) available ONLY when specifically ordered (add S to the product code, examples: KEF 316AS, KE 316AS Y/R)

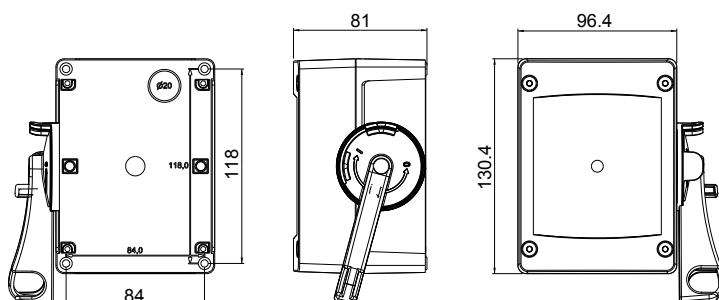

Type		AC-21	400 V	AC-22	400 V	AC-23		AC-23		EAN-Code 6419410...		Enclosure	Weight kg
			415 V		415 V		400 V		690 V				
			690 V		690 V		415 V						
Grey/black	Yellow/red	I _n / A		I _n / A		I _n / A	P / kW	I _n / A	P / kW	Grey/black	Yellow/red		
3-pole													
KE 316M	KE 316M Y/R	16 A		16 A		16 A	7.5 kW	16 A	11 kW	...304006	...304129	U2	0.5
KE 325M	KE 325M Y/R	25 A		25 A		25 A	11 kW	25 A	22 kW	...304013	...304136	U2	0.5
KE 340M	KE 340M Y/R	40 A		40 A		40 A	22 kW	25 A	22 kW	...304020	...304143	U2	0.5
4-pole													
KE 416M	KE 416M Y/R	16 A		16 A		16 A	7.5 kW	16 A	11 kW	...304037	...304150	U2	0.5
KE 425M	KE 425M Y/R	25 A		25 A		25 A	11 kW	25 A	22 kW	...304044	...304167	U2	0.5
KE 440M	KE 440M Y/R	40 A		40 A		40 A	22 kW	25 A	22 kW	...304051	...304174	U2	0.5
Fireman version													
3-pole													
KEF 316M		16 A		16 A		16 A	7.5 kW	16 A	11 kW	...304365		U2	0.5
KEF 325M		25 A		25 A		25 A	11 kW	25 A	22 kW	...304372		U2	0.5
KEF 340M		40 A		40 A		40 A	22 kW	25 A	22 kW	...304389		U2	0.5
4-pole													
KEF 416M		16 A		16 A		16 A	7.5 kW	16 A	11 kW	...304396		U2	0.5
KEF 425M		25 A		25 A		25 A	11 kW	25 A	22 kW	...304402		U2	0.5
KEF 440M		40 A		40 A		40 A	22 kW	25 A	22 kW	...304419		U2	0.5

Data subject to change without notice