

Type : HV012 Series Relay

Revised : 2020-08-26
Issued : 2015-08-31



■ Type List

Terminal style	Contact form	Designation (provided with)	
		Flux tight	Flanged cover (Flux tight)
Plug-in terminal	1A (SPDM)	HV012-1AH-C	HV012-1AH-C1
		HV012H-1AH-C	HV012H-1AH-C1
PCB terminal		HV012P-1AH-C	-----
		HV012HP-1AH-C	-----

■ Ordering Information

HV012 H P - 1A H - C
1 2 3 4 5 6

- | | |
|---|--|
| 1. HV012 -- Basic series designation | 4. 1A -- Form A, single-pole, double-make (SPDM) |
| 2. Blank -- Standard type
H -- High power type | 5. H -- Contact material Ag alloy |
| 3. Blank -- Plug-in terminal
P -- PCB terminal | 6. C -- Flux tight
C1 -- Flanged cover (Flux tight) |

■ Contact Rating

Type	Standard type	High power type
Rated load (Resistive)	20A 450VDC	25A 450VDC

■ Coil Rating (DC)

Rated voltage (V)	Rated current $\pm 10\%$ at 23°C (mA)	Coil resistance $\pm 10\%$ at 23°C (Ω)	Pick up voltage (Max.) at 23°C	Drop out voltage (Min.) at 23°C	Max. continuous voltage at 23°C ⁽¹⁾	Power consumption at rated voltage
12	104	115	75% of rated voltage	5% of rated voltage	116% of rated voltage	approx. 1.25W

Notes : (1) Without continuous contact current.

(2) Coil terminal with polarity sensitivity, please follow the layout instruction.

Type : HV012 Series Relay

Revised : 2020-08-26
Issued : 2015-08-31

■ Specification

Contact material	Ag alloy		
Voltage drop ⁽¹⁾	Typ.40mV at 10A		
Operate time ⁽¹⁾	30ms Max.		
Release time ⁽¹⁾	15ms Max.		
Insulation resistance ⁽¹⁾	100MΩ Min. (DC 500V)		
Dielectric strength ⁽¹⁾	Between open contact		: AC 2000V, 50/60Hz 1 min.
	Between contact and coil		: AC 2500V, 50/60Hz 1 min.
Vibration resistance	Operating extremes	10~500Hz, 5.0G	
	Damage limits	10~500Hz, 5.0G	
Shock resistance	Operating extremes	10G	
	Damage limits	100G	
Life expectancy	Mechanical		500,000 ops. (frequency 9,000 ops./hr)
	Electrical	Rated switching capacity (Resistive)	Standard type : 20A 450VDC: 5,000 ops. High power type : 25A 450VDC: 5,000 ops. (frequency 180 ops./hr).
		Overload switching capacity	Standard type : 30A 450VDC: 50 ops. High power type : 37.5A 450VDC: 50 ops.
		Short term carrying current	30A 10min., 45A 5sec.
Operating ambient temperature	-40~+85°C (no freezing)		
Weight	Approx. 65g, 70g (flanged cover)		

Notes : (1) Initial value. Operate and release time excluding contact bounce.

(2) Coil and contact sides with polarities (+) and (-).

(3) Unless otherwise specified, all tests are under room temperature and humidity.

(4) Consider the heat of PCB is necessary, please check the actual condition of PCB.

(5) Applying no diode to this relay. The life expectancy will be lower when a diode is used. To use a varistor (ZNR) could absorb the coil surge of relay that is recommended.

(6) Do not use the relay exceeding the coil rating, contact rating and life expectancy, or this may cause the risk of overheating.

(7) To assure optimum performance, avoid the relay from dropping, hitting, or other unnecessary shocks.

(8) Take care to avoid cross connections as they may cause malfunctions or overheating.

(9) To avoid mounting the relay in strong magnetic fields (near a transformer or magnet) or close to an object that radiates heat.

Type : HV012 Series Relay

Revised : 2020-08-26

Issued : 2015-08-31

- (10) Use suitable harnesses and bus bars according to the current as below :
20A type : Min. 3 mm²
25A type : Min. 6 mm²
- (11) To avoid unexpected damage, when tightening a screw, use no exceeding specified torque range as below :
M4 screw : 2.5 ~ 3 N.m
- (12) Please pay attention to the phenomenon of freezing in the low temperature environment below 0°C.
Please evaluate the actual use of the environment.
- (13) Please contact Song Chuan for the detailed information.

Confirmed by	Checked by	Prepared by
副總經理 葉家昇 20'.08.27	研發經理 蕭琪騰 20'.08.26	文管課長 胡麗珠 20'.08.26



Type : HV012 Series Relay

Revised : 2020-08-26



Issued : 2015-08-31

■ Outline Dimensions

◆ Plug-in terminal / -C cover

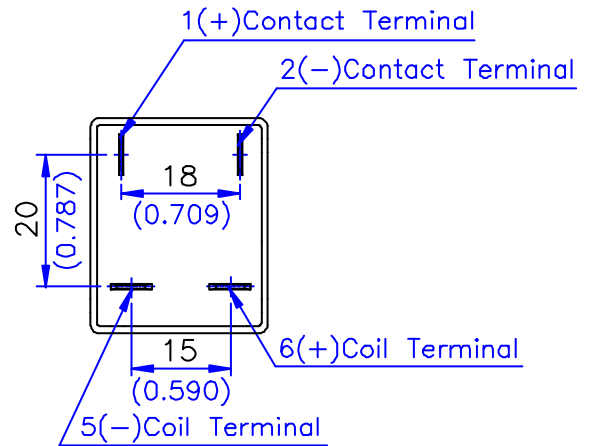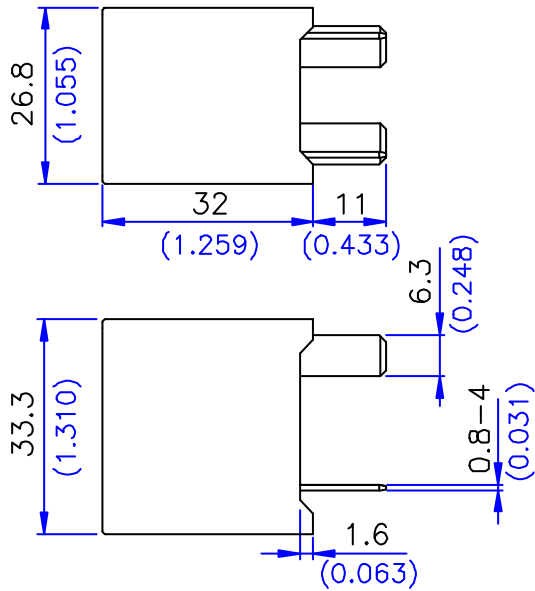

◆ Plug-in terminal / -C1 cover

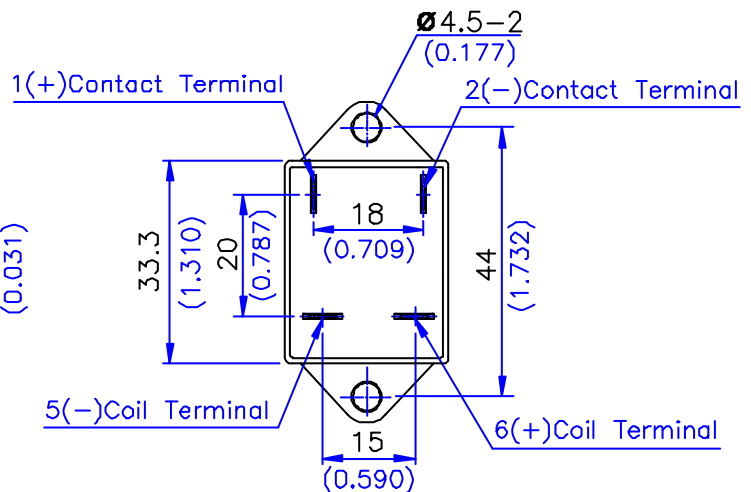
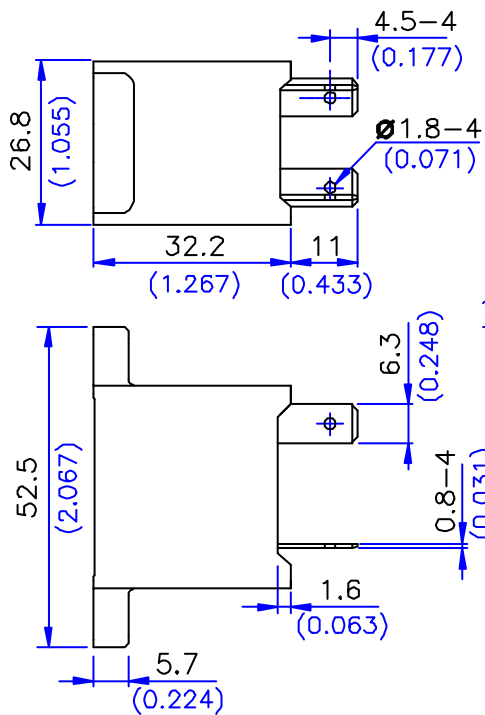


Type : HV012 Series Relay



Revised : 2020-08-26

Issued : 2015-08-31

◆HV012P (-C cover type)

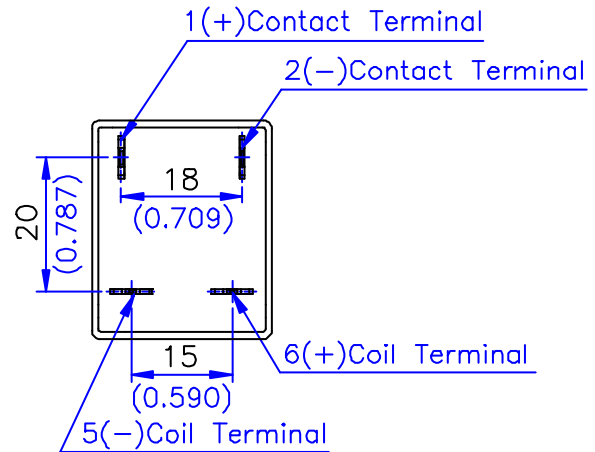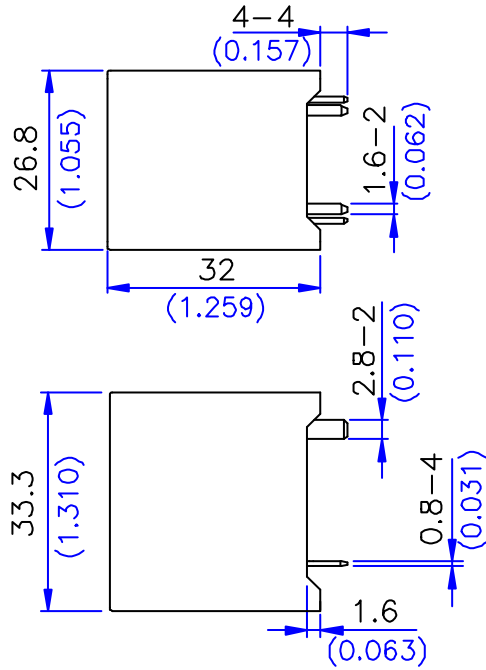

◆ HV012HP (-C cover type)

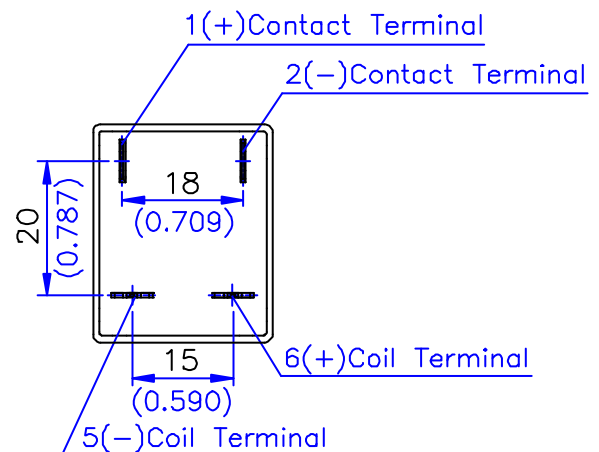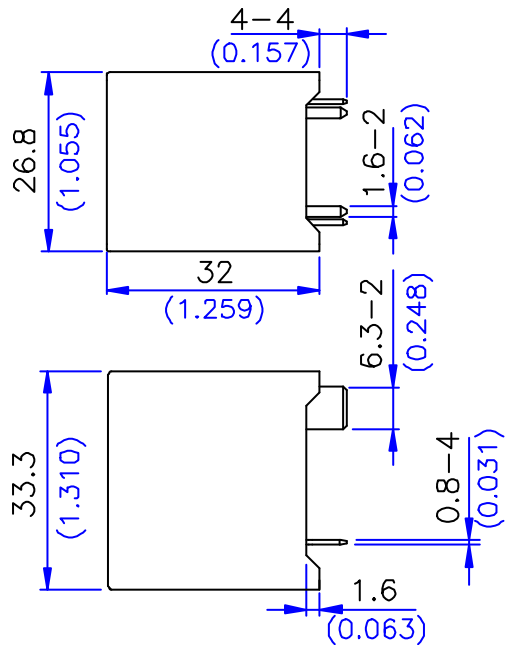

TOLERANCE:

LESS THAN: 1(0.039)±0.1(0.004)

5(0.197)±0.3(0.012)

20(0.787)±0.5(0.020)


MORE THAN:20(0.787)±1(0.039)

Type : HV012 Series Relay

Revised : 2020-08-26

Issued : 2015-08-31


■ Wiring Diagram (Bottom view)



Load sides and coil terminals are with polarities (+) and (-).

■ PC Board Layout (Bottom view)

◆ HV012P

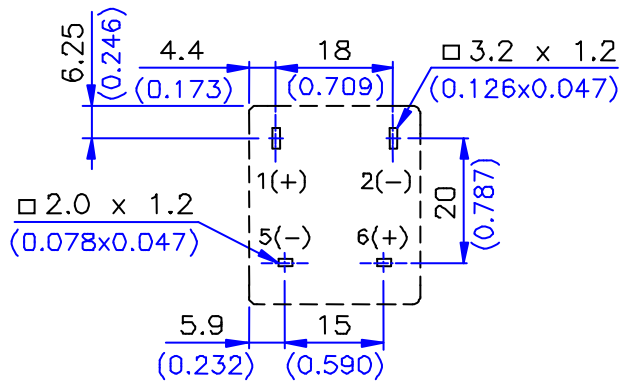

◆ HV012HP

