


Type : HV014 Series Relay

Revised :
Issued : 2020-08-26

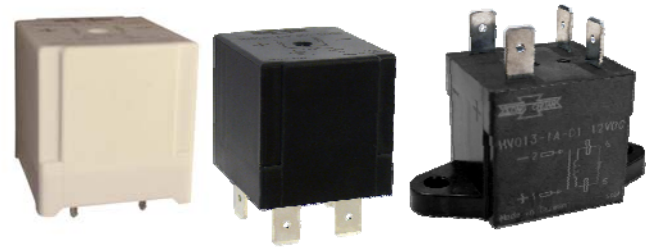

■ Type List

| Terminal style | Contact form | Designation (provided with) | |
|------------------|--------------|-----------------------------|----------------------------|
| | | Flux tight | Flanged cover (Flux tight) |
| Plug-in terminal | 1A (SPDM) | HV014-1AH-C | HV014-1AH-C1 |
| PCB terminal | | HV014P-1AH-C | ----- |

■ Ordering Information

HV014 P - 1A H - C
 1 2 3 4 5 6

- | | |
|---|---|
| 1. HV014 -- Basic series designation | 4. H -- Contact material Ag alloy |
| 2. Blank -- Plug-in terminal P -- PCB terminal | 5. C -- Flux tight C1 -- Flanged cover (Flux tight) |
| 3. 1A -- Form A, single-pole, double-make (SPDM) | 6. <input type="checkbox"/> -- Coil voltage (please refer to the coil rating data for the availability) |

■ Contact Rating

| | |
|------------------------|------------|
| Rated load (Resistive) | 30A 450VDC |
|------------------------|------------|

Note : (1) Coil terminal with polarity sensitivity, please follow the layout instruction.

■ Coil Rating (DC)

| Rated voltage (V) | Rated current ±10 % at 23°C (mA) | Coil resistance ±10 % at 23°C (Ω) | Pick up voltage (Max.) at 23°C | Drop out voltage (Min.) at 23°C | Continuous voltage at 105°C ⁽²⁾ | Power consumption at rated / holding voltage |
|-------------------|----------------------------------|-----------------------------------|--------------------------------|---------------------------------|--|--|
| 12 | 266.6 | 45 | 75% of rated voltage | 5% of rated voltage | 35~40% of rated voltage | approx. 3.2W / 0.39W ⁽²⁾ |

Notes : (1) To energize relay properly apply 100%~120% nominal coil voltage for 200ms.

(2) Coil holding voltage is 35~40% of nominal voltage after applying nominal voltage for 200ms.

■ Specification

| | |
|------------------|----------|
| Contact material | Ag alloy |
|------------------|----------|

Type : HV014 Series Relay

Revised :
Issued : 2020-08-26

| | | | |
|--------------------------------------|---|---|---|
| Voltage drop ⁽¹⁾ | Typ.40mV at 10A | | |
| Operate time ⁽¹⁾ | 30ms Max. | | |
| Release time ⁽¹⁾ | 15ms Max. | | |
| Insulation resistance ⁽¹⁾ | 100MΩ Min. (DC 500V) | | |
| Dielectric strength ⁽¹⁾ | Between open contact | : AC 2000V, 50/60Hz 1 min. | |
| | Between contact and coil | : AC 2500V, 50/60Hz 1 min. | |
| Vibration resistance | Operating extremes | 10~500Hz, 5.0G | |
| | Damage limits | 10~500Hz, 5.0G | |
| Shock resistance | Operating extremes | 10G | |
| | Damage limits | 100G | |
| Life expectancy | Mechanical | | |
| | 500,000 ops. (frequency 9,000 ops./hr) | | |
| | Electrical | Rated switching capacity (Resistive) | 30A 450VDC: 10,000 ops. (frequency 180 ops./hr). |
| | | Overload switching capacity | 45A 450VDC: 50 ops. |
| Short term carrying current | | 40A 10min., 50A 5sec. | |
| Operating ambient temperature | -40~+105°C (no freezing) | | |
| Weight | Approx. 65g, 70g (flanged cover) | | |

Notes : (1) Initial value. Operate and release time excluding contact bounce.

(2) Coil and contact sides with polarities (+) and (-).

(3) Unless otherwise specified, all tests are under room temperature and humidity.

(4) Consider the heat of PCB is necessary, please check the actual condition of PCB.

(5) Applying no diode to this relay. The life expectancy will be lower when a diode is used. To use a varistor (ZNR) could absorb the coil surge of relay that is recommended.

(6) Do not use the relay exceeding the coil rating, contact rating and life expectancy, or this may cause the risk of overheating.

(7) To assure optimum performance, avoid the relay from dropping, hitting, or other unnecessary shocks.

(8) Take care to avoid cross connections as they may cause malfunctions or overheating.

(9) To avoid mounting the relay in strong magnetic fields (near a transformer or magnet) or close to an object that radiates heat.

(10) Use suitable harnesses and bus bars according to the current as below :

30A type : Min. 6 mm²

(11) To avoid unexpected damage, when tightening a screw, use no exceeding specified torque range as below :

Type : HV014 Series Relay

Revised :
Issued : 2020-08-26

M5 screw : 4.5 ~ 5 N.m

(12) Please pay attention to the phenomenon of freezing in the low temperature environment below 0°C.

Please evaluate the actual use of the environment.

(13) Please contact Song Chuan for the detailed information.


| Confirmed by | Checked by | Prepared by |
|--------------------------|--------------------------|--------------------------|
| 副總經理 葉家昇 20'.08.30 | 研發經理 蕭琪騰 20'.08.27 | 文管課長 胡麗珠 20'.08.26 |

Type : HV014 Series Relay


Revised :
Issued : 2020-08-26

■ Outline Dimensions

◆-C cover

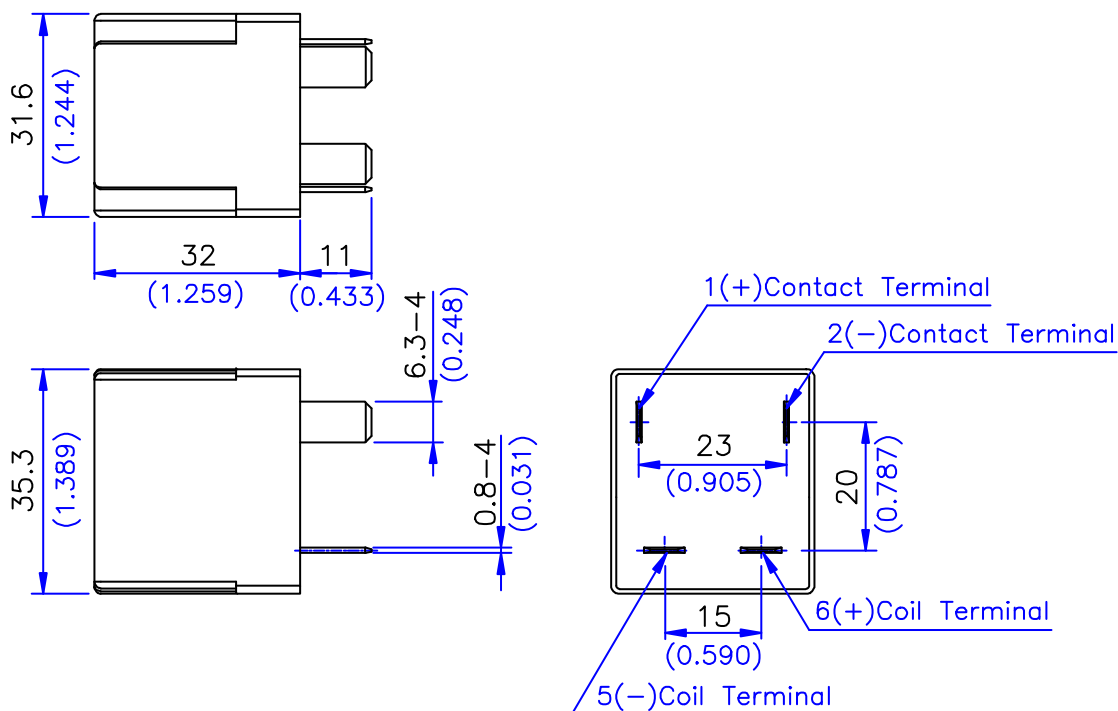


◆-C1 cover

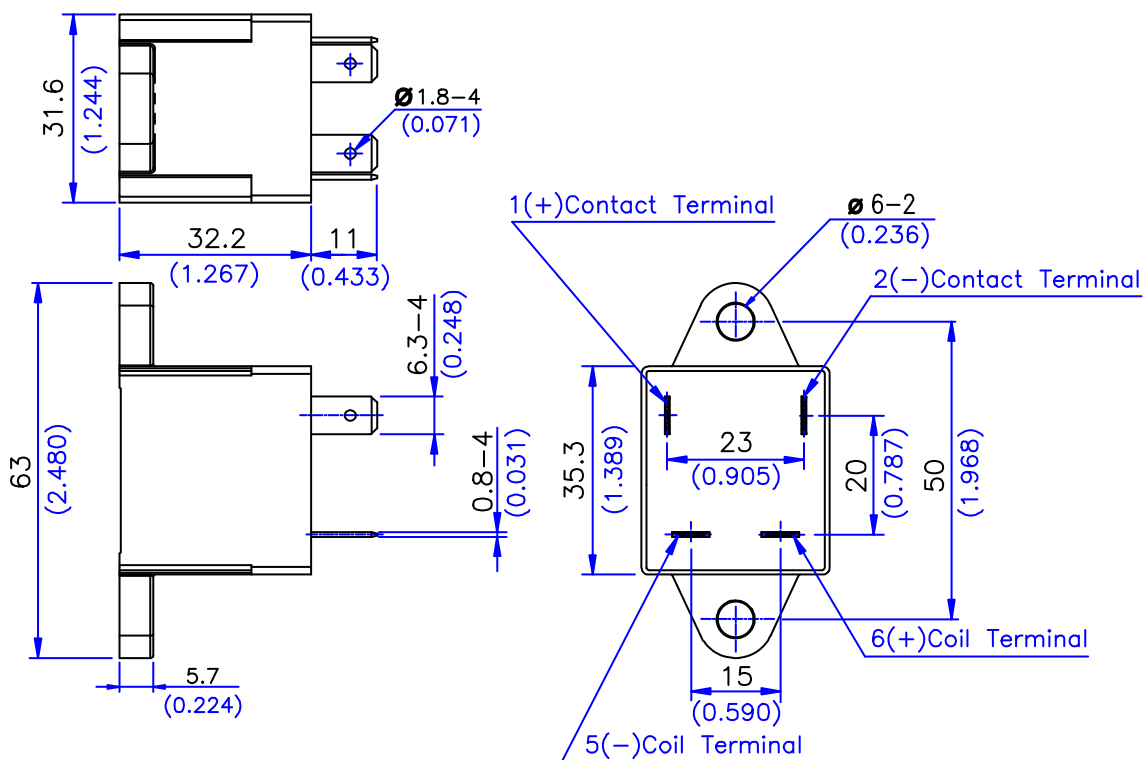

Type : HV014 Series Relay


Revised :
Issued : 2020-08-26

◆HV014P (-C cover type)

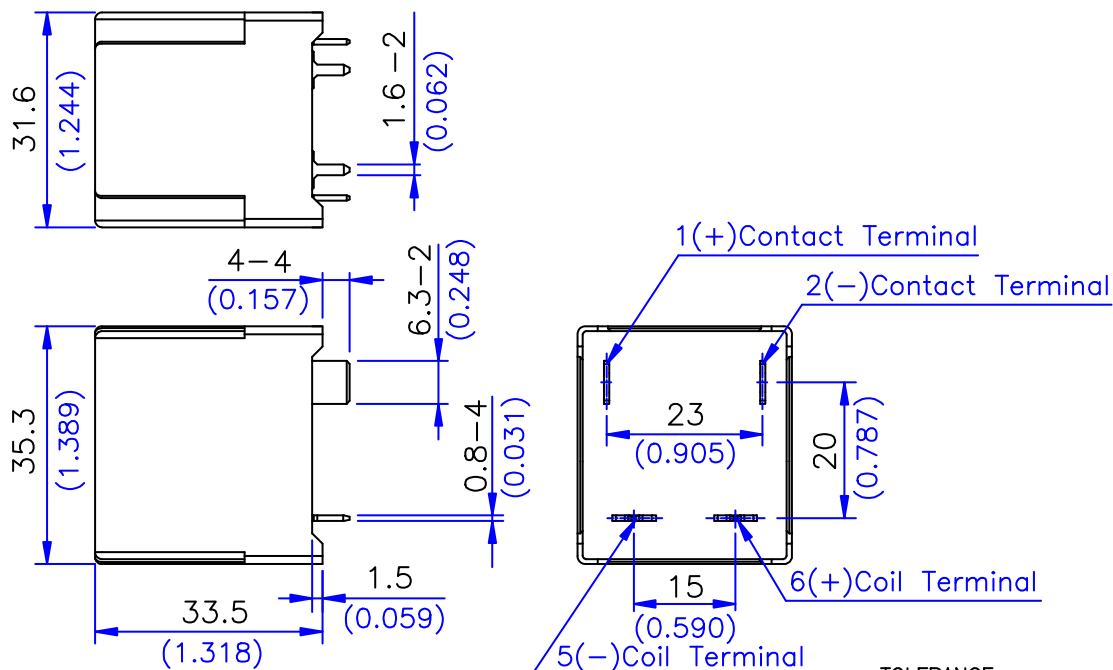

TOLERANCE:
 LESS THAN: 1(0.039)±0.1(0.004)
 5(0.197)±0.3(0.012)
 20(0.787)±0.5(0.020)
 MORE THAN: 20(0.787)±1(0.039)

■ Wiring Diagram (Bottom view)



Load sides and coil terminals are with polarities (+) and (-).

■ PC Board Layout (Bottom view)

◆HV014P

