



D2.5/8.SF.2L spring terminal blocks

For 5 x 20 and 5 x 25 fuses - with test socket - 8 mm 0.315 in spacing



D2.5/8.SF.2L



8 mm 0.315 in spacing

Description

- Protect your circuits with 5 x 20 and 5x 25 fuse terminal blocks (fuse not supplied with the terminal blocks),
- Easy to access thanks to its front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation.

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse	Grey	D2.5/8.SFT.2L	1SNA290091R2600	50	14.00
	Orange	D2.5/8.SFT.2L	1SNA290092R2700	50	14.00

Main technical data

Connecting capacity	IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.12-4 mm²	26-12 AWG
	Flexible	0.12-2.5 mm²	26-12 AWG
	with non insulated ferrule		
	with insulated ferrule		
Gauge	A2		
Rated current / Rated cross section	6.3 A / 2.5 mm²	8 A / 12 AWG	8 A / 12 AWG
Rated short-time withstand current (1s)			
Rated voltage	630 V	600 V	600 V
Impulse withstand voltage	8000 V		
Protection	IP20	NEMA 1	



Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 3.5 mm Ø 0.138 in

RoHS	USR CNR	CSA	Gost R
------	---------	-----	--------

Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	FED8SF.2L	1SNA291131R1700	20	3.50
3 Jumper bars	Orange	BJDL8-2	1SNA291122R1600	50	0.20
		BJDL8-3	1SNA291123R1700	50	0.40
		BJDL8-4	1SNA291144R2400	50	0.50
		BJDL8-5	1SNA291145R2500	20	3.90
4 Cross spacing jumpers	Orange	BJDPL5.8-2	1SNA291160R0000	20	1.65
		BJDPL6.8-2	1SNA291170R0200	20	0.20
		BJDPL8.10-2	1SNA291484R1200	20	1.50
		FC2.MC	1SNA107239R0300	20	1.00
5 Test plugs	Black				
6 Fuses		FU520	1SNA008288R1500	10	
		1 A	1SNA008290R1300	10	
		2 A	1SNA008291R0000	10	
7 Assembly rods		TGA8	1SNA168672R1100	10	1.00
			1SNA168673R1200	10	
			1SNA168674R1300	10	
8 Spring retaining rings		ANT	1SNA168675R1400	10	
9 Terminal block markers	White	RC610	1SNA233000R0100	1	7.50

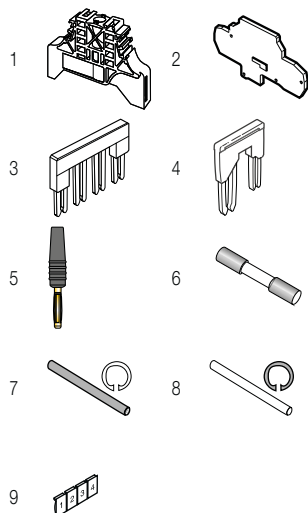


Disconnect spring terminal blocks


Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect	Grey, blue	D2.5/8.SNT.2L	1SNA290097R2400	50	15.00

D2.5/8.SF.2L spring terminal blocks



For 5 x 20 and 5 x 25 fuses - with blown fuse indicator and test sockets - 8 mm 0.315 in spacing



D2.5/8.SF.2L



8 mm 0.315 in spacing

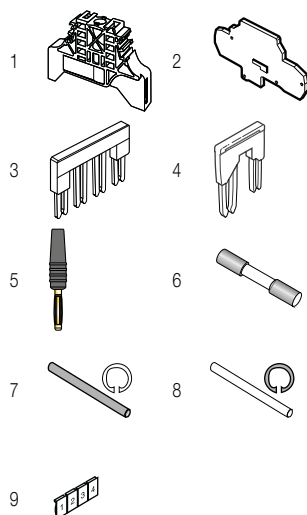

Description

- Protect your circuits with 5 x 20 and 5x 25 fuse terminal blocks (fuse not delivered with the terminal blocks),
- Quickly identify the defective circuit thanks to the blown fuse indicator,
- Easy to access thanks to the front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation.

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse	Grey	D2.5/8.SFLT.2L	1SNA290093R2000	50	15.00
	Grey	D2.5/8.SFDT.2L	1SNA290094R2100	50	15.00

Main technical data

Connecting capacity	IEC	UL	CSA
1 conductor per clamp			
Rigid - Solid / Stranded	0.12-4 mm²	26-12 AWG	26-12 AWG
Flexible	0.12-2.5 mm²		
with non insulated ferrule			
with insulated ferrule			
Gauge	A2		
Rated current / Rated cross section	6.3 A / 2.5 mm²	8 A / 12 AWG	8 A / 12 AWG
Rated short-time withstand current (1s)			
Rated voltage	630 V	600 V	600 V
Impulse withstand voltage	8000 V		
Protection	IP20	NEMA 1	

Mounting instructions

Rail	TH 35-7.5, TH 35-15
Wire stripping length	9.5 mm 0.37 in
Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in

RoHS	USR CNR	CSA	Gost R
------	---------	-----	--------

Notes

Leakage current: 24 V: < 4.5 mA
110 V: < 0.5 mA
230 V: < 0.7 mA

Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	FED8SF.2L	1SNA291131R1700	20	3.50
3 Jumper bars	Orange	BJDL8-2	1SNA291122R1600	50	0.20
		BJDL8-3	1SNA291123R1700	50	0.40
		BJDL8-4	1SNA291144R2400	50	0.50
		BJDL8-5	1SNA291145R2500	20	3.90
4 Cross spacing jumpers	Orange	BJDPL5.8-2	1SNA291160R0000	20	1.65
		BJDPL6.8-2	1SNA291170R0200	20	0.20
		BJDPL8.10-2	1SNA291148R1200	20	1.50
5 Test plugs	Black	FC2.MC	1SNA107239R0300	20	1.00
6 Fuses		FU520	1SNA008288R1500	10	
			1SNA008290R1300	10	
			1SNA008291R0000	10	
7 Assembly rods		TGA8	1SNA168672R1100	10	1.00
			1SNA168673R1200	10	
			1SNA168674R1300	10	
8 Spring retaining rings		ANT	1SNA168675R1400	10	
9 Terminal block markers	White	RC610	1SNA233000R0100	1	7.50


Disconnect spring terminal blocks

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect	Grey, blue	D2.5/8.SNT.2L	1SNA290097R2400	50	15.00


D2.5/8.SNT.2L spring terminal blocks

Disconnect with lever - 8 mm 0.315 in spacing

		2.5 mm² 12 AWG
--	---	--



D2.5/8.SNT.2L



8 mm 0.315 in spacing

Description

Save space with compact overall dimensions terminal blocks,
– Link bar for lever included in terminal block.

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect 2 connections	Grey, blue	D2.5/8.SNT.2L	1SNA290097R2400	50	15.00


Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.12-4 mm ²	26-12 AWG	26-12 AWG
	Flexible with non insulated ferrule	0.12-2.5 mm ²		
	with insulated ferrule			
	Gauge	A2		
Rated current / Rated cross section		6.3 A / 2.5 mm ²	8 A / 12 AWG	8 A / 12 AWG
Rated short-time withstand current (1s)		90 A		
Rated voltage		630 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	

Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 3.5 mm Ø 0.138 in

RoHS		RoHS	USR CNR	CSA	Gost R
------	--	------	---------	-----	--------

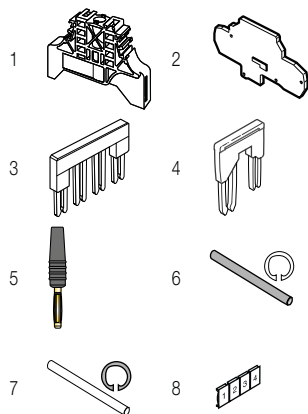

Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	FED8SF.2L	1SNA291131R1700	20	3.50
3 Jumper bars	Orange	BJDL8-2	1SNA291122R1600	50	0.20
		BJDL8-3	1SNA291123R1700	50	0.40
		BJDL8-4	1SNA291144R2400	50	0.50
		BJDL8-5	1SNA291145R2500	20	3.90
4 Cross spacing jumpers	Orange	BJDPL5.8-2	1SNA291160R0000	20	1.65
		BJDPL6.8-2	1SNA291170R0200	20	0.20
		BJDPL8.10-2	1SNA291484R1200	20	1.50
5 Test plugs	Black	FC2.MC	1SNA107239R0300	20	1.00
6 Assembly rods		TGA8	1SNA168672R1100	10	1.00
			1SNA168673R1200	10	
			1SNA168674R1300	10	
7 Spring retaining rings		ANT	1SNA168675R1400	10	
8 Terminal block markers	White	RC610	1SNA233000R0100	1	7.50

Fuse spring terminal blocks

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse	Grey	D2.5/8.SFT.2L	1SNA290091R2600	50	14.00