



D2.5/5.2L spring terminal blocks

Feed-through with 2 connections - 5 mm 0.197 in spacing



D2.5/5.2L



5 mm 0.197 in spacing

Description

- Easy to access thanks to its front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation,
- Numerous built-in functions: double jumpering system, clearly visible top marker, test sockets, etc,
- Functional through ergonomic design (alignment).

Ordering details

Description	Colour	Type	Order code	Pkg	Weight
Feed-through 2 connections	Grey	D2.5/5.2L	1SNA290021R2700	50	6.00
	Blue	D2.5/5.2L	1SNA290023R2100	50	6.00
	Orange	D2.5/5.2L	1SNA290022R2000	50	6.00
	Yellow	D2.5/5.2L	1SNA290027R2500	50	6.00
	Green	D2.5/5.2L	1SNA290028R0600	50	6.00
	Red	D2.5/5.2L	1SNA290024R2200	50	6.00
	Purple	D2.5/5.2L	1SNA290465R0100	50	6.00
	Brown	D2.5/5.2L	1SNA290464R0000	50	6.00
	White	D2.5/5.2L	1SNA290025R2300	50	6.00
	Black	D2.5/5.2L	1SNA290026R2400	50	6.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.12-4 mm²	26-12 AWG	26-12 AWG
	Flexible	0.12-2.5 mm²		
	with non insulated ferrule			
	with insulated ferrule			
Gauge		A2		
Rated current / Rated cross section		24 A / 2.5 mm²	15 A / 12 AWG	15 A / 12 AWG
Rated short-time withstand current (1s)		300 A		
Rated voltage		800 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	


Mounting instructions

Rail	TH 35-7.5, TH 35-15
Wire stripping length	9.5 mm 0.37 in
Tool	Flat screwdriver Ø 3.5 mm Ø 0.138 in

RoHS	USR CNR	CSA	Gost R
------	---------	-----	--------

Accessories

Description	Colour	Type	Order code	Pkg	Weight
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	FED5.2L	1SNA291061R2400	20	2.00
3 Jumper bars	Orange	2 poles	1SNA291102R2300	50	1.00
		3 poles	1SNA291103R2400	50	0.70
		4 poles	1SNA291104R2500	50	0.80
		5 poles	1SNA291105R2600	20	0.90
		10 poles	1SNA291110R2600	20	1.20
		5 mm 0.200 in - 6 mm 0.236 in	1SNA291150R0600	20	0.20
		5 mm 0.200 in - 8 mm 0.315 in	1SNA291160R0000	20	1.65
4 Cross spacing jumpers	Orange	5 mm 0.200 in - 10 mm 0.400 in	1SNA291480R2200	20	0.50
5 Circuit separators	Orange	SCD5.2L	1SNA291352R0400	20	2.20
6 Test plugs	Black	FC2.MC	1SNA107239R0300	20	1.00
7 Shield connectors		CBDS.2L	1SNA291077R2400	50	2.00
8 Terminal block markers	White	RC510	1SNA231000R0700	1	5.20

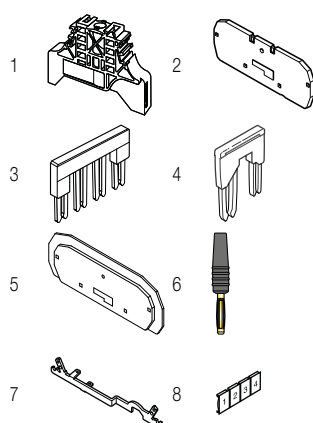


Ground spring terminal blocks

Description	Colour	Type	Order code	Pkg	Weight
Ground Screwless rail connection	Green-yellow	D2.5/5.P.2L	1SNA290029R0700	50	9.00


All the technical data for UL/CSA standard and dimensions in inches are in italic.
Technical data valid for copper conductors only.

D2.5/5.3L spring terminal blocks

Feed-through with 3 connections - 5 mm 0.197 in spacing



D2.5/5.3L



5 mm 0.197 in spacing

Description

- Easy to access thanks to its front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation,
- Numerous built-in functions: double jumper system, clearly visible top marker, test sockets, etc,
- Functional through ergonomic design (alignment).

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 3 connections	Grey	D2.5/5.3L	1SNA290031R2100	50	7.00
	Blue	D2.5/5.N.3L	1SNA290033R2300	50	7.00
	Orange	D2.5/5.3L	1SNA290032R2200	50	7.00
	Yellow	D2.5/5.3L	1SNA290037R2700	50	7.00
	Green	D2.5/5.3L	1SNA290038R0000	50	7.00
	Red	D2.5/5.3L	1SNA290034R2400	50	7.00
	White	D2.5/5.3L	1SNA290035R2500	50	7.00
	Black	D2.5/5.3L	1SNA290036R2600	50	7.00

Main technical data

Connecting capacity	IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.12-4 mm²	26-12 AWG
	Flexible	0.12-2.5 mm²	
	with non insulated ferrule		
	with insulated ferrule		
	Gauge	A2	
Rated current / Rated cross section	24 A / 2.5 mm²	15 A / 12 AWG	15 A / 12 AWG
Rated short-time withstand current (1s)	300 A		
Rated voltage	800 V	600 V	600 V
Impulse withstand voltage	8000 V		
Protection	IP20	NEMA 1	


Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 3.5 mm Ø 0.138 in

RoHS	RoHS	USR CNR	CSA	Gost R
------	------	---------	-----	--------


Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1800	50	12.00
2 End sections	Grey	FED5.3L	1SNA291051R2200	20	1.90
3 Jumper bars	Orange	2 poles	BJDL5-2	50	1.00
		3 poles	BJDL5-3	50	0.70
		4 poles	BJDL5-4	50	0.80
		5 poles	BJDL5-5	20	0.90
		10 poles	BJDL5-10	20	1.20
		5 mm 0.200 in - 6 mm 0.236 in	BJDPL5.6-2	20	0.20
4 Cross spacing jumpers	Orange	5 mm 0.200 in - 8 mm 0.315 in	BJDPL5.8-2	20	1.65
		5 mm 0.200 in - 10 mm 0.400 in	BJDPL5.10-2	20	0.50
5 Circuit separators	Orange	SCD5.3L	1SNA291362R0600	20	2.60
6 Test plugs	Black	FC2.MC	1SNA107239R0300	20	1.00
7 Terminal block markers	White	RC510	1SNA231000R0700	1	5.20

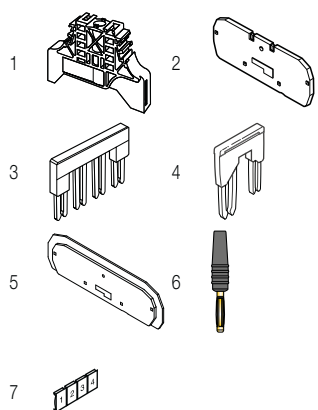


Ground spring terminal blocks

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Screwless rail connection	Green-yellow	D2.5/5.P.3L	1SNA290039R0100	50	11.00




D2.5/5.4L spring terminal blocks

Feed-through with 4 connections - 5 mm 0.197 in spacing



D2.5/5.4L



5 mm 0.197 in spacing

Description

- Easy to access thanks to its front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation,
- Numerous built-in functions: double jumper system, clearly visible top marker, test sockets, etc,
- Functional through ergonomic design (alignment).

Ordering details

Description	Colour	Type	Order code	Pkg	Weight
Feed-through 4 connections	Grey	D2.5/5.4L	1SNA290011R2500	50	8.00
	Blue	D2.5/5.4L	1SNA290013R2700	50	8.00
	Orange	D2.5/5.4L	1SNA290012R2600	50	8.00
	Yellow	D2.5/5.4L	1SNA290017R2300	50	8.00
	Green	D2.5/5.4L	1SNA290018R0400	50	8.00
	Red	D2.5/5.4L	1SNA290014R2000	50	8.00
	White	D2.5/5.4L	1SNA290015R2100	50	8.00
	Black	D2.5/5.4L	1SNA290016R2200	50	8.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.12-4 mm²	26-12 AWG	26-12 AWG
	Flexible	0.12-2.5 mm²		
	with non insulated ferrule			
	with insulated ferrule			
Gauge		A2		
Rated current / Rated cross section		24 A / 2.5 mm²	15 A / 12 AWG	15 A / 12 AWG
Rated short-time withstand current (1s)		300 A		
Rated voltage		800 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	


Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 3.5 mm Ø 0.138 in




Accessories

Description	Colour	Type	Order code	Pkg	Weight
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	FED5.4L	1SNA291041R2000	20	2.20
3 Jumper bars	Orange	2 poles	BJDL5-2	50	1.00
		3 poles	BJDL5-3	50	0.70
		4 poles	BJDL5-4	50	0.80
		5 poles	BJDL5-5	20	0.90
		10 poles	BJDL5-10	20	1.20
4 Cross spacing jumpers	Orange	5 mm 0.200 in - 6 mm 0.236 in	BJDPL5.6-2	20	0.20
		5 mm 0.200 in - 8 mm 0.315 in	BJDPL5.8-2	20	1.65
		5 mm 0.200 in - 10 mm 0.400 in	BJDPL5.10-2	20	0.50
5 Circuit separators	Orange	SCD5.4L	1SNA291372R0000	20	2.90
6 Test plugs	Black	FC2.MC	1SNA107239R0300	20	1.00
7 Terminal block markers	White	RC510	1SNA231000R0700	1	5.20

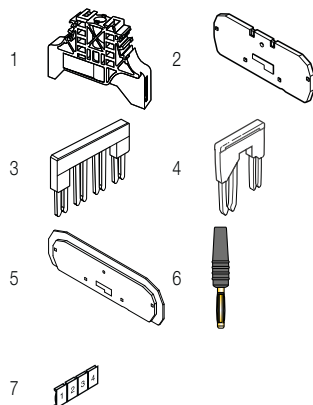


Ground spring terminal blocks

Description	Colour	Type	Order code	Pkg	Weight
Ground	Green-yellow	D2.5/5.P.4L	1SNA290019R0500	50	12.00




D2.5/5.I.3L spring terminal blocks

Feed-through with 3 connections - 5 mm 0.197 in spacing



D2.5/5.I.3L



5 mm 0.197 in spacing

Description

- Easy to access thanks to its front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation,
- Numerous built-in functions: double jumper system, clearly visible top marker, test sockets, etc.

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 3 connections	Grey	D2.5/5.I.3L	1SNA399068R1700	50	8.00
	Blue	D2.5/5.I.N.3L	1SNA399067R0600	50	8.00
	Orange	D2.5/5.I.3L	1SNA399260R2000	50	8.00
	Yellow	D2.5/5.I.3L	1SNA400219R1100	50	8.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.12-4 mm²	26-12 AWG	26-14 AWG
	Flexible	0.12-2.5 mm²		
	with non insulated ferrule			
	with insulated ferrule			
Gauge		A2		
Rated current / Rated cross section		24 A / 2.5 mm²	20 A / 12 AWG	15 A / 14 AWG
Rated short-time withstand current (1s)		300 A		
Rated voltage		800 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	


Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 3.5 mm Ø 0.138 in

RoHS	USR CNR	CSA	Gost R
------	---------	-----	--------


Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	FED5.I.3L	1SNA290311R0600	20	2.10
3 Jumper bars	Orange	2 poles	1SNA291102R2300	50	1.00
		3 poles	1SNA291103R2400	50	0.70
		4 poles	1SNA291104R2500	50	0.80
		5 poles	1SNA291105R2600	20	0.90
		10 poles	1SNA291110R2600	20	1.20
4 Test plugs	Black	FC2.MC	1SNA107239R0300	20	1.00
5 Shield connectors		CBD5.2L	1SNA291077R2400	50	2.00
6 Terminal block markers	White	RC510	1SNA231000R0700	1	5.20




Ground spring terminal blocks

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	D2.5/5.I.P.3L	1SNA399072R0300	50	11.00




D2.5/5.I.4L spring terminal blocks



Feed-through with 4 connections - 5 mm 0.197 in spacing



D2.5/5.I.4L



5 mm 0.197 in spacing



Description

- Easy to access thanks to its front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation,
- Numerous built-in functions: clearly visible top marker, test sockets, etc.

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 4 connections	Grey	D2.5/5.I.4L	1SNA399071R0200	50	9.00
	Blue	D2.5/5.I.N.4L	1SNA399070R1500	50	9.00
	Orange	D2.5/5.I.4L	1SNA399270R2200	50	9.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.12-4 mm²	26-12 AWG	26-14 AWG
	Flexible	0.12-2.5 mm²		
	with non insulated ferrule			
	with insulated ferrule			
Gauge		A2		
Rated current / Rated cross section		24 A / 2.5 mm²	20 A / 12 AWG	15 A / 14 AWG
Rated short-time withstand current (1s)		300 A		
Rated voltage		800 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	

Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 3.5 mm Ø 0.138 in

RoHS	USR CNR	CSA	Gost R
------	---------	-----	--------

Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	FED5.I.3L	1SNA290311R0600	20	2.10
3 Test plugs	Black	FC2.MC	1SNA107239R0300	20	1.00
4 Shield connectors		CBD5.2L	1SNA291077R2400	50	2.00
5 Terminal block markers	White	RC510	1SNA231000R0700	1	5.20

Ground spring terminal blocks


Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	D2.5/5.I.P.4L	1SNA399073R0400	50	12.00

Feed-through with 2 connections - 6 mm *0.236 in* spacing




D4/6.3L spring terminal blocks

Feed-through with 3 connections - 6 mm 0.236 in spacing



D4/6.3L



6 mm 0.236 in spacing

Description

- Easy to access thanks to its front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation,
- Numerous built-in functions: double jumper system, clearly visible top marker, test sockets, etc,
- Functional through ergonomic design (alignment).

Ordering details

Description	Colour	Type	Order code	Pkg	Weight
Feed-through 3 connections	Grey	D4/6.3L	1SNA290405R0600	50	12.00
	Blue	D4/6.N.3L	1SNA290407R0000	50	12.00
	Orange	D4/6.3L	1SNA290406R0700	50	12.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.2-6 mm²	24-10 AWG	24-10 AWG
	Flexible	0.2-4 mm²		
	with non insulated ferrule			
	with insulated ferrule			
Gauge		A4		
Rated current / Rated cross section		32 A / 4 mm²	25 A / 10 AWG	25 A / 10 AWG
Rated short-time withstand current (1s)		480 A		
Rated voltage		800 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	

Mounting instructions


Rail		TH 35-7.5, TH 35-15
Wire stripping length		11 mm 0.43 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards. All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.abb.com>




Accessories

Description	Colour	Type	Order code	Pkg	Weight
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	FED6.3L	1SNA291694R2400	20	2.50
3 Jumper bars	Orange	2 poles	BJDL6-2	50	0.30
		3 poles	BJDL6-3	50	0.40
		4 poles	BJDL6-4	50	0.50
		5 poles	BJDL6-5	20	0.60
		6 poles	BJDL6-6	20	0.70
4 Cross spacing jumpers	Orange	5 mm 0.200 in - 6 mm 0.236 in	BJDPL5.6-2	20	0.20
		6 mm 0.236 in - 8 mm 0.315 in	BJDPL6.8-2	20	0.20
		6 mm 0.236 in - 10 mm 0.400 in	BJDPL6.10-2	20	1.00
		6 mm 0.236 in - 12 mm 0.473 in	BJDPL6.12-2	20	3.10
		6 mm 0.236 in - 14 mm 0.551 in	BJDPL6.14-2	20	3.10
5 Test plugs	Black	FC2.MC	1SNA107239R0300	20	1.00
6 Terminal block markers	White	RC610	1SNA233000R0100	1	7.50




Ground spring terminal blocks

Description	Colour	Type	Order code	Pkg	Weight
Ground	Green-yellow	D4/6.P.3L	1SNA290409R1200	50	11.00




D4/6.4L spring terminal blocks

Feed-through with 4 connections - 6 mm 0.236 in spacing



D4/6.4L



6 mm 0.236 in spacing

Description

- Easy to access thanks to its front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation,
- Numerous built-in functions: double jumper system, clearly visible top marker, test sockets, etc,
- Functional through ergonomic design (alignment).

Ordering details

Description	Colour	Type	Order code	Pkg	Weight
Feed-through 4 connections	Grey	D4/6.4L	1SNA290410R0600	50	14.00
	Blue	D4/6.N.4L	1SNA290412R2400	50	14.00
	Orange	D4/6.4L	1SNA290411R2300	50	14.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.2-6 mm²	24-10 AWG	24-10 AWG
	Flexible	0.2-4 mm²		
	with non insulated ferrule			
	with insulated ferrule			
Gauge		A4		
Rated current / Rated cross section		32 A / 4 mm²	25 A / 10 AWG	25 A / 10 AWG
Rated short-time withstand current (1s)		480 A		
Rated voltage		800 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	


Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		11 mm 0.43 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in

RoHS	UL	CSA	Gost R
------	----	-----	--------

Accessories

Description	Colour	Type	Order code	Pkg	Weight
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	FED6.4L	1SNA291696R2600	20	2.85
3 Jumper bars	Orange	2 poles	BJDL6-2	50	0.30
		3 poles	BJDL6-3	50	0.40
		4 poles	BJDL6-4	50	0.50
		5 poles	BJDL6-5	20	0.60
		6 poles	BJDL6-6	20	0.70
4 Cross spacing jumpers	Orange	5 mm 0.200 in - 6 mm 0.236 in	BJDPL5.6-2	20	0.20
		6 mm 0.238 in - 8 mm 0.315 in	BJDPL6.8-2	20	0.20
		6 mm 0.236 in - 10 mm 0.400 in	BJDPL6.10-2	20	1.00
		6 mm 0.236 in - 12 mm 0.473 in	BJDPL6.12-2	20	3.10
5 Test plugs	Black	FC2.MC	1SNA107239R0300	20	1.00
6 Terminal block markers	White	RC610	1SNA233000R0100	1	7.50





Ground spring terminal blocks


Description	Colour	Type	Order code	Pkg	Weight
Ground	Green-yellow	D4/6.P.4L	1SNA290414R2600	50	14.00

D6/8.2L spring terminal blocks

Feed-through with 2 connections - 8 mm 0.315 in spacing



D6/8.2L



8 mm 0.315 in spacing

Description

- Easy to access thanks to its front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation,
- Numerous built-in functions: double jumper system, clearly visible top marker, test sockets, etc,
- Functional through ergonomic design (alignment).

Ordering details


Description	Colour	Type	Order code	Pkg	Weight
Feed-through 2 connections	Grey	D6/8.2L	1SNA290081R2400	50	12.00
	Blue	D6/8.N.2L	1SNA290083R2600	50	12.00
	Orange	D6/8.2L	1SNA290082R2500	50	12.00
	Yellow	D6/8.2L	1SNA290087R2200	50	12.00
	Red	D6/8.2L	1SNA290084R2700	50	12.00
	Black	D6/8.2L	1SNA290086R2100	50	12.00

Main technical data

Connecting capacity	IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-10 mm²	22-8 AWG
	Flexible	0.5-6 mm²	22-8 AWG
	with non insulated ferrule		
	with insulated ferrule		
	Gauge	A5	
Rated current / Rated cross section			
Rated short-time withstand current (1s)			
Rated voltage			
Impulse withstand voltage			
Protection			


Mounting instructions

Rail	TH 35-7.5, TH 35-15
Wire stripping length	13 mm 0.53 in
Tool	Flat screwdriver Ø 5.5 mm Ø 0.217 in




Accessories

Description	Colour	Type	Order code	Pkg	Weight
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	FED8.2L	1SNA291161R2500	20	2.00
3 Jumper bars	Orange	2 poles	BJDL8-2	50	0.20
		3 poles	BJDL8-3	50	0.40
		4 poles	BJDL8-4	50	0.50
		5 poles	BJDL8-5	20	3.90
		6 poles	BJDL8-6	20	1.65
4 Cross spacing jumpers	Orange	5 mm 0.200 in - 8 mm 0.315 in	BJDPL5.8-2	20	1.65
		6 mm 0.238 in - 8 mm 0.315 in	BJDPL6.8-2	20	0.20
		8 mm 0.315 in - 10 mm 0.400 in	BJDPL8.10-2	20	1.50
		12 mm 0.472 in - 16 mm 0.630 in	BJDPL12.16-2	20	1.50
5 Test plugs	Black	FC2.MC	1SNA107239R0300	20	1.00
6 Terminal block markers	White	RC810	1SNA234000R0200	1	8.20




Ground spring terminal blocks

Description	Colour	Type	Order code	Pkg	Weight
Ground	Green-yellow	D6/8.P.2L	1SNA290089R0400	50	16.00




Feed-through with 3 connections - 8 mm *0.315 in* spacing

		6 mm ² 8 AWG
---	---	----------------------------


[illegible]

1. Insert the RJ45 module into the RJ45 port.
2. Push the RJ45 module into the port until it is fully seated.
3. The RJ45 module is now fully inserted into the port.
4. The RJ45 module is now fully inserted into the port.
5. The RJ45 module is now fully inserted into the port.
6. The RJ45 module is now fully inserted into the port.




D10/10.3L spring terminal blocks

Feed-through with 3 connections - 10 mm 0.394 in spacing



D10/10.3L



10 mm 0.394 in spacing

Description

- Easy to access thanks to its front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation,
- Numerous built-in functions: double jumper system, clearly visible top marker, test sockets, etc,
- Functional through ergonomic design (alignment).

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 3 connections	Grey	D10/10.3L	1SNA290423R2700	25	35.28
	Blue	D10/10.N.3L	1SNA290424R2000	25	35.28
	Orange	D10/10.3L	1SNA290425R2100	25	35.28

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-16 mm²	20-6 AWG	20-6 AWG
	Flexible	0.5-10 mm²		
	with non insulated ferrule			
	with insulated ferrule			
Gauge		B6		
Rated current / Rated cross section		57 A / 10 mm²	50 A / 6 AWG	50 A / 6 AWG
Rated short-time withstand current (1s)		1200 A		
Rated voltage		1000 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	


Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		12 mm 0.47 in
Tool		Flat screwdriver Ø 5.5 mm Ø 0.217 in

RoHS	RoHS	UL	UL	CSA	CSA	Gost R	Gost R
------	------	----	----	-----	-----	--------	--------

Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	FED10.3L	1SNA291731R2000	20	4.00
3 Jumper bars	Orange	2 poles	BJDL1.10.2	50	2.45
		3 poles	BJDL1.10.3	50	3.65
		4 poles	BJDL1.10.4	50	4.86
		5 poles	BJDL1.10.5	50	6.05
4 Cross spacing jumpers	Orange	5 mm 0.200 in - 10 mm 0.400 in	BJDPL5.10-2	20	0.50
		6 mm 0.236 in - 10 mm 0.400 in	BJDPL6.10-2	20	1.00
		8 mm 0.315 in - 10 mm 0.400 in	BJDPL8.10-2	20	1.50
				20	1.50
5 Test plugs	Black	FC2.MC	1SNA107239R0300	20	1.00
6 Terminal block markers	White	RC1010	1SNA238000R1600	1	1.30




Ground spring terminal blocks


Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	D10/10.P.3L	1SNA290427R2300	25	40.00

D16/12.2L spring terminal blocks

Feed-through with 2 connections - 12 mm 0.472 in spacing



D16/12.2L



12 mm 0.472 in spacing

Description

- Easy to access thanks to its front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation,
- Numerous built-in functions: double jumper system, clearly visible top marker, test sockets, etc,
- Functional through ergonomic design (alignment).

Ordering details

Description	Colour	Type	Order code	Pkg	Weight
Feed-through 2 connections	Grey	D16/12.2L	1SNA399581R2700	25	27.00
	Blue	D16/12.N.2L	1SNA399582R2000	25	27.00
	Yellow	D16/12.2L	1SNA400180R0700	25	27.00
	Red	D16/12.2L	1SNA400179R1100	25	27.00
	Black	D16/12.2L	1SNA400178R1000	25	27.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-25 mm²	20-6 AWG	20-6 AWG
	Flexible	0.5-16 mm²		
	with non insulated ferrule			
	with insulated ferrule			
Gauge		A7		
Rated current / Rated cross section		76 A / 16 mm²	54 A / 6 AWG	54 A / 6 AWG
Rated short-time withstand current (1s)		1920 A		
Rated voltage		1000 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	



Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		19 mm 0.73 in
Tool		Flat screwdriver Ø 6.5 mm Ø 0.256 in

RoHS	UL	CSA	PCB	Gost R
------	----	-----	-----	--------

Accessories

Description	Colour	Type	Order code	Pkg	Weight
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	FED12.2L	1SNA399571R0400	10	5.00
3 Jumper bars	Orange	BJDL12-2	1SNA399563R0400	25	7.00
4 Cross spacing jumpers	Orange	BJDPL6.12-2	1SNA399613R0600	20	3.10
5 Test plugs	Black	FC2.MC	1SNA107239R0300	20	1.00
6 Terminal block markers	White	RC1010	1SNA238000R1600	1	1.30




Ground spring terminal blocks


Description	Colour	Type	Order code	Pkg	Weight
Ground	Green-yellow	D16/12.P.2L	1SNA399584R2200	25	56.00

D16/12.3L spring terminal blocks

Feed-through with 3 connections - 12 mm 0.472 in spacing



D16/12.3L



12 mm 0.472 in spacing

Description

- Easy to access thanks to its front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation,
- Numerous built-in functions: double jumper system, clearly visible top marker, test sockets, etc,
- Functional through ergonomic design (alignment).

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through 3 connections	Grey	D16/12.3L	1SNA290428R0400	10	55.00
	Blue	D16/12.N.3L	1SNA290429R0500	10	55.00
	Orange	D16/12.3L	1SNA290430R0200	10	55.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-25 mm²	20-4 AWG	20-4 AWG
	Flexible	0.5-16 mm²		
	with non insulated ferrule			
	with insulated ferrule			
Gauge		A7		
Rated current / Rated cross section		76 A / 16 mm²	54 A / 4 AWG	54 A / 4 AWG
Rated short-time withstand current (1s)		1920 A		
Rated voltage		1000 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	


Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		19 mm 0.73 in
Tool		Flat screwdriver Ø 6.5 mm Ø 0.256 in

RoHS	RoHS	USR CNR	CSA	Gost R															
------	------	---------	-----	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Accessories


Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BADL	1SNA399903R0200	50	4.70
		BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	FED12.3L	1SNA291721R2600	20	5.50
3 Jumper bars	Orange	BJDL12-2	1SNA399563R0400	25	7.00
4 Cross spacing jumpers	Orange	BJDPL6.12-2	1SNA399613R0600	20	3.10
5 Test plugs	Black	FC2.MC	1SNA107239R0300	20	1.00
6 Terminal block markers	White	RC1010	1SNA238000R1600	1	1.30



Ground spring terminal blocks

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	D16/12.P.3L	1SNA290432R2000	10	72.00

Feed-through with 2 connections - 16 mm *0.630 in* spacing



- Easy to access thanks to its front wiring entry,
- Clamping contact pressure non dependent on the operator and automatic creeping compensation,
- Numerous built-in functions: double jumper system, clearly visible top marker, test sockets, etc,
- Functional through ergonomic design (alignment).

Description		Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	2 connections	Grey	D35/16.2L	1SNA399617R0200	10	95.00
		Blue	D35/16.N.2L	1SNA399618R1300	10	95.00
		Yellow	D35/16.2L	1SNA400183R2600	10	95.00
		Red	D35/16.2L	1SNA400182R2200	10	95.00
		Black	D35/16.2L	1SNA400181R2400	10	95.00

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	2.5-50 mm ²	14-2 AWG	
	Flexible	2.5-35 mm ²		
	with non insulated ferrule			
	with insulated ferrule			
	Gauge	A9		
Rated current / Rated cross section		125 A / 35 mm ²	93 A / 2 AWG	
Rated short-time withstand current (1s)		4200 A		
Rated voltage		1000 V	600 V	
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	

Rail		TH 35-7.5, TH 35-15
Wire stripping length		26 mm 1.02 in
Tool		Flat screwdriver Ø 6.5 mm Ø 0.256 in

RoHS RoHS CE USR CNR PC Gost R

Description				Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1	End stops	12 mm	0.472 in	Grey	BADH	1SNA116900R2700	50	24.00
2	Jumper bars	2 poles	115 A	Orange	BJDL16-2	1SNA399621R0600	25	10.00
3	Test plugs	DIA 2 mm	0.079 in	Black	FC2.MC	1SNA107239R0300	20	1.00
4	Terminal block markers			White	RC1010	1SNA238000R1600	1	1.30

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	D35/16.P.2L	1SNA399620R1100	10	120.00