


SNA series, terminal blocks

Spring clamp technology




Feed-through

Section											
IEC	UL/CSA										
2.5 mm ²	12 AWG	D2.5/5.2L	5 mm 0.197 in	D2.5/5.3L	5 mm 0.197 in	D2.5/5.4L	5 mm 0.197 in	D2.5/5.1.3L	5 mm 0.197 in	D2.5/5.1.4L	5 mm 0.197 in
4 mm ²	10 AWG	D4/6.2L	6 mm 0.236 in	D4/6.3L	6 mm 0.236 in	D4/6.4L	6 mm 0.236 in				
6 mm ²	8 AWG	D6/8.2L	8 mm 0.315 in	D6/8.3L	8 mm 0.315 in						
10 mm ²	6 AWG	D10/10.1.2L	10 mm 0.394 in	D10/10.3L	10 mm 0.394 in						
16 mm ²	6 AWG	D16/12.2L	12 mm 0.472 in	D16/12.3L	12 mm 0.472 in						
35 mm ²	2 AWG	D35/16.2L	16 mm 0.630 in								



Ground

Section											
IEC	UL/CSA										
2.5 mm ²	12 AWG	D2.5/5.P.2L	5 mm 0.197 in	D2.5/5.P.3L	5 mm 0.197 in	D2.5/5.P.4L	5 mm 0.197 in	D2.5/5.I.P.3L	5 mm 0.197 in	D2.5/5.I.P.4L	5 mm 0.197 in
4 mm ²	10 AWG	D4/6.P.2L	6 mm 0.236 in	D4/6.P.3L	6 mm 0.236 in	D4/6.P.4L	6 mm 0.236 in				
6 mm ²	8 AWG	D6/8.P.2L	8 mm 0.315 in	D6/8.P.3L	8 mm 0.315 in						
10 mm ²	6 AWG	D10/10.1.P.2L	10 mm 0.394 in	D10/10.P.3L	10 mm 0.394 in						
16 mm ²	6 AWG	D16/12.P.2L	12 mm 0.472 in	D16/12.P.3L	12 mm 0.472 in						
35 mm ²	2 AWG	D35/16.P.2L	16 mm 0.630 in								

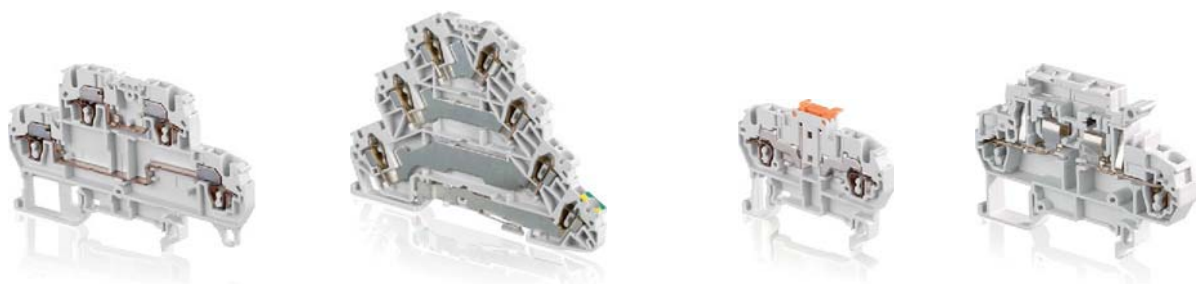

Double deck

Triple deck

Triple deck + ground

Disconnect

For 5 x 20 and 5 x 25 mm fuses
(0.197" x 0.787" and 0.197" x 0.984")

Section								
IEC	UL/CSA							
2.5 mm ²	12 AWG	D2.5/5.D.2L 5 mm 0.197 in	D2.5/5.T.L 5 mm 0.197 in	D2.5/5.T3.PL 5 mm 0.197 in	D2.5/5.T1.PL 5 mm 0.197 in	D2.5/5.SNBT... 5 mm 0.197 in	D2.5/8.SF.2L 5 mm 0.197 in	D2.5/8.SNT.2L 5 mm 0.197 in

All the technical data for UL/CSA standard and dimensions in inches are in *italic*.

	Terminal	-		Hole for testing or jumpering	-		Testing point	-		Fuse holder	-		Blown-fuse indicator	-		Ground connection, linked to the DIN rail
	Interconnection between decks	-		Disconnect function												