



MA2.5/5.SNB screw clamp terminal blocks

Disconnect with blade - 5 mm 0.197 in spacing



MA2.5/5.SNB



5 mm 0.197 in spacing

Description

- Ease your disconnect operations with the disconnect blade operated by hand or with screwdriver,
- Same profile as MA2.5/5 feed-through terminal block for aligned marking and identical end section use.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect	Grey-orange	MA2.5/5.SNB	1SNA115699R2000	50	8.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-4 mm²		28-12 AWG
	Flexible with insulated ferrule	0.5-2.5 mm²		
	Gauge	A3		
Rated current / Rated cross section		10 A / 2.5 mm²		15 A / 12 AWG
Rated short-time withstand current (1s)		120 A		
Rated voltage		320 V		600 V
Impulse withstand voltage		4000 V		
Protection		IP20	NEMA 1	

Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		10 mm 0.39 in
Tool		Flat screwdriver Ø 3.5 mm Ø 0.138 in
Torque		0.4 - 0.6 N.m 3.5 - 5.3 lb.in

CE	RoHS	cCSAus	Gost R																
----	------	--------	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Accessories

Description		Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	10 mm	Grey	BAM2	1SNA206351R1600	50	12.00
	9 mm		BADL	1SNA399903R0200	50	4.70
2 End sections	2.8 mm	Grey	FEM6	1SNA118368R1600	20	2.40
3 Lateral jumper bars	2 poles	Grey	PC5-2	1SNA113542R1000	10	1.80
	10 poles		PC5-10	1SNA113544R1200	10	6.00
4 Circuit separators	3 mm	Grey	SCFM6	1SNA114825R0500	20	4.00
			SCF6	1SNA118707R0300	20	
			CBM5	1SNA178745R1400	50	
5 Shield connectors						
6 Terminal block markers	Blank card	White	RC510	1SNA231000R0700	1	5.20


MA2.5/5.SNBT screw clamp terminal blocks

Disconnect with blade - with test socket

5 mm 0.197 in spacing



MA2.5/5.SNBT



5 mm 0.197 in spacing

Description

- Ease your test operations with the two built-in test socket,
- Ease your disconnect operations with the disconnect blade operated by hand or with screwdriver,
- Same profile as MA2.5/5 feed-through terminal block for aligned marking and identical end section use.

Ordering details

Description		Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect	With 2 tests sockets DIA 2 mm 0.079 in	Grey-orange	MA2.5/5.SNBT	1SNA115700R0500	50	11.00
	With 2 tests sockets DIA 2.3 mm 0.091 in	Grey-orange	MA2.5/5.SNBT	1SNA115701R2200	50	11.00
		Grey-grey	MA2.5/5.SNBTA	1SNA115505R1600	50	11.00
		Blue-grey	MA2.5/5.SNBTA	1SNA125505R1000	50	11.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-4 mm²		28-12 AWG
	Flexible	0.5-2.5 mm²		
	with insulated ferrule			
	Gauge	A3		
Rated current / Rated cross section		10 A / 2.5 mm²		15 A / 12 AWG
Rated short-time withstand current (1s)		120 A		
Rated voltage		320 V		600 V
Impulse withstand voltage Protection		4000 V		
		IP10	NEMA	


Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		10 mm 0.39 in
Tool		Flat screwdriver Ø 3.5 mm Ø 0.138 in
Torque		0.4 - 0.6 N.m 3.5 - 5.3 lb.in

CE	RoHS	cCSAus	Gost R																
----	------	--------	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--


Accessories

Description		Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	10 mm 0.394 in	Grey	BAM2	1SNA206351R1600	50	12.00
	9 mm 0.354 in		BADL	1SNA399903R0200	50	4.70
2 End sections	2.8 mm 0.110 in	Grey	FEM6	1SNA118368R1600	20	2.40
3 Lateral jumper bars	2 poles 30 A	Grey	PC5-2	1SNA113542R1000	10	1.80
	10 poles		PC5-10	1SNA113544R1200	10	6.00
4 Circuit separators	3 mm 0.118 in	Grey	SCFM6	1SNA114825R0500	20	4.00
			SCF6	1SNA118707R0300	20	
5 Test plugs	DIA 2 mm 0.079 in	Black	FC2	1SNA007865R2600	100	
6 Shield connectors			CBM5	1SNA178745R1400	50	
7 Terminal block markers	Blank card	White	RC510	1SNA231000R0700	1	5.20

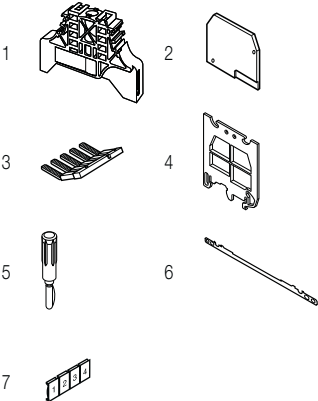


M4/6.SNB screw clamp terminal blocks

Disconnect with blade - 6 mm 0.236 in spacing



M4/6.SNB



6 mm 0.236 in spacing

Description

- Ease your disconnect operations with the disconnect blade operated by hand or with screwdriver,
- Same profile as M4/6 feed-through terminal block for aligned marking.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect	Grey, Orange	M4/6.SNB	1SNA115986R0000	50	11.00
	Orange, Orange	M4/6.SNB	1SNA105053R2200	50	11.00
	Grey, Grey	M4/6.SNB	1SNA115686R1300	50	11.00
	Beige, Grey	M4/6.SNB	1SNA195686R1400	50	11.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-4 mm²	22-10 AWG	24-10 AWG
	Flexible	0.5-4 mm²		
	with insulated ferrule			
	Gauge	A4		
Rated current / Rated cross section		20 A / 4 mm²	10 A / 10 AWG	15 A / 10 AWG
Rated short-time withstand current (1s)		300 A		
Rated voltage		400 V	300 V	600 V
Impulse withstand voltage		4000 V		
Protection		IP20	NEMA 1	

Mounting instructions


Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 4 mm Ø 0.16 in
Torque		0.5 - 0.6 N.m 4.4 - 5.3 lb.in

CE	RoHS	UL	cCSAus	Gost R															
CE	RoHS	UL	cCSAus	Gost R															


Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BAM2	1SNA206351R1600	50	12.00
		BADL	1SNA399903R0200	50	4.70
2 End sections	Grey	FEM62	1SNA114994R0700	20	2.40
3 Jumper bars	Grey	AD2.5	1SNA114205R2000	50	1.60
4 Lateral jumper bars		PC61-10	1SNA163311R2200	10	5.00
5 Circuit separators	Grey	SCFM6	1SNA114825R0500	20	4.00
6 Shield connectors		CBM5	1SNA178745R1400	50	
7 Terminal block markers	White	RC610	1SNA233000R0100	1	7.50
Blank card					


Disconnect with blade - with test socket - 6 mm 0.236 in spacing



Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.374 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.5 - 0.6 N.m 4.4 - 5.3 lb.in




Description				Color	Type	Order code	Pkg qty	Weight (1 pce) g
1	End stops	10 mm	0.394 in	Grey	BAM2	1SNA206351R1600	50	12.00
		9 mm	0.354 in		BADL	1SNA399903R0200	50	4.70
2	End sections	3 mm	0.118 in	Grey	FEM62	1SNA114994R0700	20	2.40
3	Jumper bars	1 poles	24 A	Grey	AD2.5	1SNA114205R2000	50	1.60
4	Lateral jumper bars	10 poles	35 A		PC61-10	1SNA163311R2200	10	5.00
5	Circuit separators	3 mm	0.118 in	Grey	SCFM6	1SNA114825R0500	20	4.00
6	Test plugs	DIA 2 mm	0.079 in	Black	FC2	1SNA007865R2600	100	
7	Shield connectors				CBM5	1SNA178745R1600	50	
8	Terminal block markers	Blank card		White	RC610	1SNA233000R0100	1	7.50

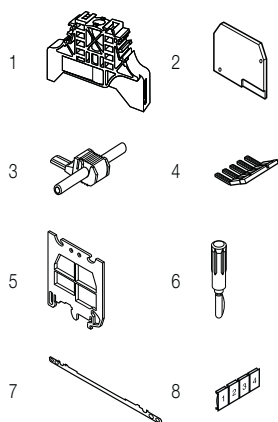


M6/8.SNB screw clamp terminal blocks

Disconnect with blade - 8 mm 0.315 in spacing



M6/8.SNB



8 mm 0.315 in spacing

Description

- Ease your disconnect operations with the disconnect blade operated by hand or with screwdriver,
- Same profile as M6/8 feed-through terminal block for aligned marking.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect	Grey, Grey	M6/8.SNB	1SNA115688R2500	50	19.00
	Orange, Orange	M6/8.SNB	1SNA105055R2400	50	19.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-10 mm²	22-8 AWG	22-8 AWG
	Flexible	0.5-6 mm²		
	with insulated ferrule			
	Gauge	A5		
Rated current / Rated cross section		15 A / 6 mm²	20 A / 8 AWG	20 A / 8 AWG
Rated short-time withstand current (1s)		180 A		
Rated voltage		400 V	300 V	600 V
Impulse withstand voltage		4000 V		
Protection		IP20	NEMA 1	

Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		12 mm 0.47 in
Tool		Flat screwdriver Ø 4-5 mm Ø 0.16-0.20 in
Torque		0.8 - 1 N.m 7.1 - 8.9 lb.in

CE	RoHS	USRI	cCSAus	Gost R															
CE	RoHS	USRI	cCSAus	Gost R															

Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BAM2	1SNA206351R1600	50	12.00
		BADL	1SNA399903R0200	50	4.70
2 End sections	Grey	FEM8	1SNA113373R2600	20	3.00
3 Jumper bars	Grey	AD2.5	1SNA114205R2000	50	1.60
4 Lateral jumper bars		PC8-2	1SNA116538R1700	10	3.00
		PC8-3	1SNA116539R1000	10	4.00
		PC8-4	1SNA116540R2500	10	6.00
		PC8-10	1SNA163313R2400	10	
5 Circuit separators	Grey	SCFM6	1SNA114825R0500	20	4.00
6 Test plugs	Black	FC2	1SNA007865R2600	100	
7 Terminal block markers	White	RC810	1SNA234000R0200	1	8.20

M4/6.D2.SNBT screw clamp terminal blocks

Disconnect with blade - with test socket - 6 mm 0.236 in spacing



M4/6.D2.SNBT



6 mm 0.236 in spacing

Description

- Save space with double deck terminal blocks: 1 disconnect circuit on top + 1 independent feed-through circuit on bottom in just 6 mm 0.236 in spacing,
- Ease your disconnect operations with the disconnect blade operated by hand or with screwdriver,
- Same profile as M4/6.D2 feed-through terminal block for aligned marking and identical end section use.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
Disconnect With 4 tests sockets DIA 2 mm 0.079 in	Grey ☐	M4/6.D2.SNBT	1SNA115561R1500	50	21.00 g

Main technical data

Connecting capacity	IEC	UL	CSA
1 conductor per clamp			
Rigid - Solid / Stranded	0.5-4 mm²	24-12 AWG	24-10 AWG
Flexible with insulated ferrule	0.5-4 mm²		
Gauge	A4		
Rated current / Rated cross section	10 A / 4 mm²	20 A / 12 AWG	15 A / 10 AWG
Rated short-time withstand current (1s)	120 A		
Rated voltage	400 V	300 V	600 V
Impulse withstand voltage Protection	4000 V		
	IP20	NEMA 1	


Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.374 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.5 - 0.6 N.m 4.4 - 5.3 lb.in

CE	RoHS	USR CNR	cCSAus	Gost R															
----	------	---------	--------	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--


Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce)
1 End stops 12 mm 0.472 in	Grey ☐	BADH	1SNA116900R2700	50	24.00 g
2 End sections 1 mm 0.039 in	Grey ☐	FEMS6D	1SNA116591R0500	20	3.70 g
3 Jumper bars 2 poles 32 A	Grey ☐	BJMI6D-2	1SNA179668R2000	10	4.00 g
3 poles		BJMI6D-3	1SNA179669R2100	10	6.00 g
4 poles		BJMI6D-4	1SNA179670R2600	10	8.00 g
5 poles		BJMI6D-5	1SNA179671R1300	10	10.00 g
10 poles		BJMI6D-10	1SNA179672R1400	10	20.00 g
4 Lateral jumper bars 10 poles 35 A		PC61-10	1SNA16331R2200	10	5.00 g
5 Cross spacing jumpers 5 mm 0.200 in - 6 mm 0.236 in - 8 mm 0.315 in		EL6	1SNA173627R2100	10	0.10 g
6 Test plugs DIA 2 mm 0.079 in	Black ☐	FC2	1SNA007865R2600	100	
7 Terminal block markers Blank card	White ☐	RC610	1SNA233000R0100	1	7.50 g

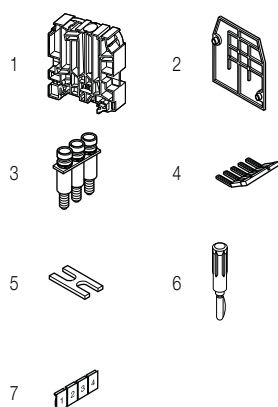


M4/6.SB screw clamp terminal blocks

Disconnect with plug - 6 mm 0.236 in spacing



M4/6.SB



6 mm 0.236 in spacing

Description

- Ease your disconnect operations with the disconnect component holder plug,
- Same profile as M4/6 feed-through terminal block for aligned marking.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect By polarized plug	Grey	M4/6.SB	1SNA115435R0700	50	10.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-4 mm²	22-10 AWG	24-10 AWG
	Flexible with insulated ferrule	0.5-4 mm²		
	Gauge	A4		
Rated current / Rated cross section		10 A / 4 mm²	10 A / 10 AWG	15 A / 10 AWG
Rated short-time withstand current (1s)		120 A		
Rated voltage		250 V	300 V	600 V
Impulse withstand voltage		4000 V		
Protection		IP20	NEMA 1	

Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.374 in
Tool		Flat screwdriver Ø 4 mm 0.157 in
Torque		0.5 - 0.8 N.m 4.4 - 7.1 lb.in


CE	RoHS	RoHS	USR	cCSAus	Gost R														
----	------	------	-----	--------	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BAM2	1SNA206351R1600	50	12.00
		BADL	1SNA399903R0200	50	4.70
2 End sections	Grey	FEM62	1SNA114994R0700	20	2.40
3 Lateral jumper bars		PC61-10	1SNA163311R2200	10	5.00
4 Circuit separators	Grey	SCF6	1SNA118707R0300	20	
5 Shield connectors		CBM5	1SNA178745R1400	50	
6 Component plugs	Beige	BNSV62	1SNA196854R1500	50	6.00
		BNF652-D1-BE	1SNA196966R1500	50	7.00
		BNF652L-BE	1SNA196967R1600	50	7.00
		BNF652	1SNA196998R1600	50	6.00
		BNF652D-BE	1SNA196999R1700	50	7.00
	Black	BFAUTO	1SNA299486R2400	50	1.00
		BNS6DG1	1SNA400146R0000	1	6.00
7 Extraction tools		EXBN2	1SNA171018R2000	1	
8 Terminal block markers	White	RC610	1SNA233000R0100	1	7.50
		Blank card			

M6/8.SB screw clamp terminal blocks

Disconnect with plug - 8 mm 0.315 in spacing



M6/8.SB



8 mm 0.315 in spacing

Description

- Ease your disconnect operations with the disconnect component holder plug,
- Same profile as M6/8 feed-through terminal block for aligned marking.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect By polarized plug	Grey	M6/8.SB	1SNA115436R0000	50	17.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-10 mm²	22-8 AWG	22-8 AWG
	Flexible with insulated ferrule	0.5-6 mm²		
	Gauge	A5		
Rated current / Rated cross section		15 A / 6 mm²	20 A / 8 AWG	20 A / 8 AWG
Rated short-time withstand current (1s)		180 A		
Rated voltage		400 V	300 V	600 V
Impulse withstand voltage Protection		4000 V		
		IP20	NEMA 1	

Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		12 mm 0.472 in
Tool		Flat screwdriver Ø 4 - 5 mm Ø 0.157 - 0.197 in
Torque		0.8 - 1 N.m 7.1 - 8.9 lb.in

The connecting capacity data for one Rigid - Solid / Stranded - Flexible conductor (when applicable) is a mandatory information required by IEC, UL and CSA standards. All other data are provided as supplementary information only. For more details, please consult our CB, UL or CSA certificates and technical datasheet available on <http://www.abn.com>

CE	RoHS	USR	cCSAus	Gost R															

Accessories



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BAM2	1SNA206351R1600	50	12.00
		BADL	1SNA399903R0200	50	4.70
2 End sections	Grey	FEM8	1SNA113373R2600	20	3.00
3 Jumper bars	Grey	AD2.5	1SNA114205R2000	50	1.60
4 Lateral jumper bars		PC8-10	1SNA163313R2400	10	14.00
5 Component plugs	Orange	BNF52	1SNA105133R1700	50	8.00
	Grey	BNF52	1SNA116924R0200	50	8.00
	Grey	BNSV82	1SNA116927R0500	50	8.00
	Beige	BNF52	1SNA196924R0300	50	8.00
	Beige	BNSV82	1SNA196927R0600	50	8.00
6 Short circuit plugs	Grey	BNCT82	1SNA116926R0400	50	9.00
	Beige	BNCT82	1SNA196926R0500	50	9.00
7 Extraction tools		EXBN2	1SNA171018R2000	1	
8 Terminal block markers	White	RC810	1SNA234000R0200	1	8.20

Complete list of accessories is indicated in the terminal block datasheet.


Some accessories such as jumper bars may modify the terminal block's ratings: complete information in the accessories catalogue pages.

M4/6.D2.SB screw clamp terminal blocks

Disconnect with plug - with test socket - 6 mm 0.236 in spacing



M4/6.D2.SB



6 mm 0.236 in spacing

Description

- Save space with double deck terminal blocks: 1 disconnect circuit on top + 1 independent feed-through circuit on bottom in just 6 mm 0.236 in spacing,
- Ease your disconnect operations with the disconnect component holder plug.

Ordering details

Description		Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect	By polarized plug with 4 test sockets DIA 2 mm 0.079 in - 1 feed-through circuit on lower deck	Grey	M4/6.D2.SBT	1SNA115702R2300	50	21.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-4 mm²		
	Flexible with insulated ferrule	0.5-4 mm²		
	Gauge	A4		
Rated current / Rated cross section		10 A / 4 mm²		
Rated short-time withstand current (1s)		120 A		
Rated voltage		250 V		
Impulse withstand voltage		4000 V		
Protection		IP20	NEMA 1	

Mounting instructions

Rail		G32. TH 35-7.5. TH 35-15
Wire stripping length		9.5 mm 0.374 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.5 - 0.6 N.m 4.4 - 5.3 lb.in

CE	RoHS	Gost R
----	------	--------

Accessories

Description		Color	Type	Order code	Pkg qty	Weight (1 pce) g
1	End stops	12 mm 0.472 in	Grey	BADH	1SNA116900R2700	50 24.00
2	End sections	1 mm 0.039 in	Grey	FEMS6D	1SNA116591R0500	20 3.70
3	Jumper bars	2 poles		BJMI6D-2	1SNA179668R2000	10 4.00
		3 poles		BJMI6D-3	1SNA179669R2100	10 6.00
		4 poles		BJMI6D-4	1SNA179670R2600	10 8.00
		5 poles		BJMI6D-5	1SNA179671R1300	10 10.00
		10 poles		BJMI6D-10	1SNA179672R1400	10 20.00
4	Lateral jumper bars	10 poles 35 A		PC61-10	1SNA163311R2200	10 5.00
5	Cross spacing jumpers	5 mm 0.200 in - 6 mm 0.236 in - 8 mm 0.315 in		EL6	1SNA173627R2100	10 0.10
6	Test plugs	DIA 2 mm 0.079 in	Black	FC2	1SNA007865R2600	100
7	Shield connectors			CBD2S	1SNA178408R1400	50
8	Component plugs	With solder leads and screws	Grey	BNSV62	1SNA116854R1400	50 6.00
			Beige	BNSV62	1SNA196854R1500	50 6.00
		With 48V blown fuse indicator	Beige	BNF652-D1-BE	1SNA196966R1500	50 7.00
		With 110-230V blown fuse indicator		BNF652L-BE	1SNA196967R1600	50 7.00
		For 5x20 fuses		BNF652	1SNA196998R1600	50 6
		With 24V blown fuse indicator		BNF652D-BE	1SNA196999R1700	50 7.00
		For FUAUTO fuses	Black	BFAUTO	1SNA299486R2400	50 1.00
9	Terminal block markers	Blank card	White	RC610	1SNA233000R0100	1 7.50


M6/8.STP screw clamp terminal blocks

Disconnect with push-turn knob - with test socket

8 mm 0.315 in spacing



M6/8.STP



8 mm 0.315 in spacing

Description

- Ease your disconnect operations with the disconnect 1/4 turn push-turn knob,
- Possibility to seal in the open and closed position,
- Ease your test operations with the built-in test socket.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect With 2 test sockets DIA 4 mm 0.157 in	Grey, orange	M6/8.STP1	1SNA115529R1500	25	21.00

Main technical data


Connecting capacity	IEC	UL	CSA	Rail	Wire stripping length	Tool	Torque
1 conductor per clamp	Rigid - Solid / Stranded Flexible with insulated ferrule Gauge	0.5-10 mm² 0.5-6 mm²	8 AWG				
Rated current / Rated cross section	15 A / 6 mm²		15 A / 8 AWG				
Rated short-time withstand current (1s)	720 A						
Rated voltage	500 V		600 V				
Impulse withstand voltage Protection	IP10	NEMA					

Mounting instructions

Rail	G32, TH 35-7.5, TH 35-15
Wire stripping length	11 mm 0.433 in
Tool	Flat screwdriver Ø 4 mm 0.157 in
Torque	0.8 - 1 N.m 7.1 - 8.9 lb.in

RoHS	CSA	Gost R
------	-----	--------

Notes

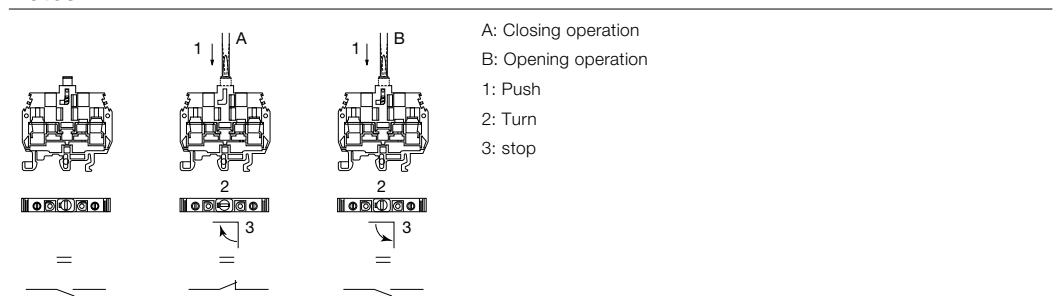

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Grey	BAM2	1SNA206351R1600	50	12.00
9 mm 0.354 in		BADL	1SNA399903R0200	50	4.70
2 End sections 2.8 mm 0.110 in	Grey	FEMT1	1SNA113137R0200	50	2.00
3 Lateral jumper bars 2 poles 50 A		PC8-2	1SNA116538R1700	10	3.00
3 poles		PC8-3	1SNA116539R1000	10	4.00
4 poles		PC8-4	1SNA116540R2500	10	6.00
10 poles		PC8-10	1SNA163313R2400	10	14.00
4 Circuit separators 1 mm 0.039 in	Grey	SCFT1	1SNA103588R2600	20	20.00
5 Test plugs DIA 4 mm 0.157 in	White	FC4	1SNA167860R0100	10	10.00
DIA 4 mm 0.157 in IP20	Red	FC4-1	1SNA167927R1000	10	11.00
6 Short circuit plugs DIA 4 mm 0.157 in	Red	BP8.A4	1SNA173888R2000	10	
	Red	BNSTP2	1SNA196789R2400	20	10.00
With test DIA 4 mm 0.157 in	Beige	BNSTP1	1SNA196792R1700	20	14.00
7 Terminal block markers Blank card	White	RC810	1SNA234000R0200	1	8.20


Feed-through screw clamp terminal blocks

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through Profile aligned with M6/8 STP...	Grey	M6/8.STP3	1SNA115500R2500	25	21.00


M6/8.STP screw clamp terminal blocks

Disconnect with push-turn knob - with test socket

8 mm 0.315 in spacing



M6/8.STP



8 mm 0.315 in spacing

Description

- Ease your disconnect operations with the disconnect ¼ turn push-turn knob,
- Possibility to seal in the open position,
- Ease your test operations with the built-in test socket.

Ordering details

Description		Color	Type	Order code	Pkg	Weight
Disconnect	With 2 test sockets DIA 4 mm 0.157 in	Grey, yellow	M6/8.STP	1SNA115277R2000	25	21.00
		Grey, black	M6/8.STP	1SNA105141R2700	25	21.00
		Grey, red	M6/8.STP	1SNA105142R2000	25	21.00

Main technical data


Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-10 mm ²	22-8 AWG	8 AWG
	Flexible	0.5-6 mm ²		
	with insulated ferrule			
	Gauge			
Rated current / Rated cross section		15 A / 6 mm ²	40 A / 8 AWG	15 A / 8 AWG
Rated short-time withstand current (1s)		180 A		
Rated voltage		500 V	600 V	600 V
Impulse withstand voltage				
Protection		IP10	NEMA	

Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		11 mm 0.433 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.8 - 1 N.m 7.1 - 8.9 lb.in

RoHS		USR		CSA															
RoHS																			

Notes

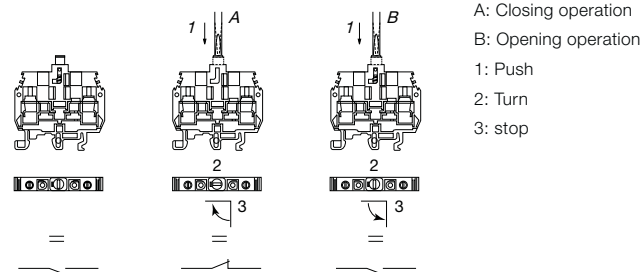

Accessories

Description		Color	Type	Order code	Pkg	Weight
1 End stops	10 mm 0.394 in	Grey	BAM2	1SNA206351R1600	50	12.00
	9 mm 0.354 in		BADL	1SNA399903R0200	50	4.70
	2.8 mm 0.110 in	Grey	FEMT1	1SNA113137R0200	50	2.00
2 End sections	2 poles		PC8-2	1SNA116538R1700	10	3.00
	3 poles		PC8-3	1SNA116539R1000	10	4.00
	4 poles		PC8-4	1SNA116540R2500	10	6.00
	10 poles		PC8-10	1SNA163313R2400	10	14.00
3 Lateral jumper bars	1 mm 0.039 in	Grey	SCFT1	1SNA103588R2600	20	20.00
4 Circuit separators	DIA 4 mm 0.157 in	White	FC4	1SNA167860R0100	10	10.00
	DIA 4 mm 0.157 in IP20	Red	FC4-1	1SNA167927R1000	10	11.00
			BP8.A4	1SNA173888R2000	10	
5 Test plugs	DIA 4 mm 0.157 in	Red	BNSTP2	1SNA196789R2400	20	10.00
	With test DIA 4 mm 0.157 in	Beige	BNSTP1	1SNA196792R1700	20	14.00
		White	RC810	1SNA234000R0200	1	8.20
6 Short circuit plugs	Blank card					
7 Terminal block markers						

Feed-through screw clamp terminal blocks


Description	Color	Type	Order code	Pkg	Weight
Feed-through	Grey	M6/8.STP3	1SNA115500R2500	25	21.00

M6/8.STP screw clamp terminal blocks

Feed-through - 8 mm 0.315 in spacing



M6/8.STP



8 mm 0.315 in spacing

Description

- Simplify the alternated feed-through and disconnect circuits operations with the same profile as M6/8 STP...
- The wiring of the alternated feed-through and disconnect circuits is easier.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Grey	M6/8.STP3	1SNA115500R2500	25	21.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-10 mm²	22-8 AWG	8 AWG
	Flexible with insulated ferrule	0.5-6 mm²		
	Gauge			
Rated current / Rated cross section		41 A / 6 mm²	40 A / 8 AWG	15 A / 8 AWG
Rated short-time withstand current (1s)		720 A		
Rated voltage		500 V	600 V	600 V
Impulse withstand voltage Protection		IP20	NEMA 1	


Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		11 mm 0.433 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.8 - 1 N.m 7.1 - 8.9 lb.in

RoHS	RoHS	USR	CSA	Gost R
------	------	-----	-----	--------

Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BAM2	1SNA206351R1600	50	12.00
		BADL	1SNA399903R0200	50	4.70
2 End sections	Grey	FEMT1	1SNA113137R0200	50	2.00
3 Jumper bars		2 poles	41 A	10	3.10
		3 poles		10	3.10
		4 poles		10	3.10
		20 poles		5	3.20
4 Fastening kits		Sub assembly post + screw + washer		20	2.00
5 Lateral jumper bars		2 poles	50 A	10	3.00
		3 poles		10	4.00
		4 poles		10	6.00
		10 poles		10	14.00
6 Circuit separators	Grey	SCFT1	1SNA103588R2600	20	20.00
7 Test plugs	White	FC4	1SNA167860R0100	10	10.00
	Red	FC4-1	1SNA167927R1000	10	11.00
8 Short circuit plugs	Red	BP8.A4	1SNA173888R2000	10	
	Red	BNSTP2	1SNA196789R2400	20	10.00
	Beige	BNSTP1	1SNA196792R1700	20	14.00
9 Terminal block markers	White	Blank card	1SNA234000R0200	1	8.20

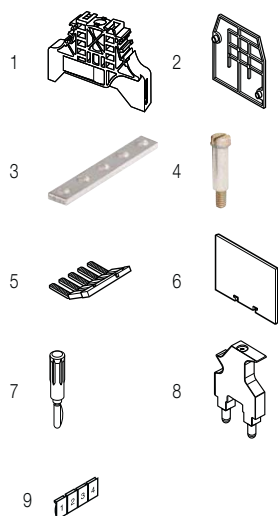

8 mm 0.315 in spacing



Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		11 mm 0.43 in
Screw clamp Tool		Flat screwdriver Ø 5.5 mm Ø 0.217 in
Torque		0.8 - 1 N.m 7.1 - 8.9 lb.in
Disconnect device Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.4 - 0.6 N.m 3.5 - 5.3 lb.in




Description				Color	Type	Order code	Pkg	Weight
							qty	(1 pce) g
1	End stops	10 mm	0.394 in	Grey	BAM2	1SNA206351R1600	50	12.00
		9 mm	0.354 in		BADL	1SNA399903R0200	50	4.70
2	End sections	3 mm	0.118 in	Grey	FEMT4	1SNA114778R0500	10	5.60
					FEMSTA	1SNA116979R2100	10	3.60
3	Jumper bars	1 poles	24 A	Grey	AD2.5	1SNA114205R2000	50	1.60
4	Lateral jumper bars	2 poles	50 A	Black	PC8-2	1SNA116538R1700	10	3.00
		3 poles			PC8-3	1SNA116539R1000	10	4.00
		4 poles			PC8-4	1SNA116540R2500	10	6.00
		10 poles			PC8-10	1SNA163313R2400	10	14.00
5	Test plugs	DIA 4 mm 0.157 in IP20		Red	FC4-1	1SNA167927R1000	10	11.00
6	Short circuit plugs				BP8.A4	1SNA173888R2000	10	
7	Terminal block markers	Blank card		White	RC810	1SNA234000R0200	1	8.20


M6/8.ST screw clamp terminal blocks

Test disconnect with a screwdriver sliding link

8 mm 0.315 in spacing



M6/8.ST



8 mm 0.315 in spacing

Description

Secure your disconnect operations with the disconnect sliding link operated with a screwdriver.

Ordering details

Description	Color	Type	Order code	Pkg	Weight
Disconnect	Grey	M6/8.ST	1SNA115236R1700	25	30.00

Main technical data

Connecting capacity	IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded Flexible with insulated ferrule Gauge	0.5-10 mm² 0.5-6 mm² A5	18 - 8 AWG 18-8 AWG
Rated current / Rated cross section	40 A / 6 mm²	30 A / 8 AWG	30 A / 8 AWG
Rated short-time withstand current (1s)	720 A		
Rated voltage	630 V	150 V	150 V
Impulse withstand voltage			
Protection	IP20	NEMA 1	


Mounting instructions

Rail	G32, TH 35-7.5, TH 35-15
Wire stripping length	13 mm 0.51 in
Screw clamp Tool	Flat screwdriver Ø 5 mm Ø 0.197
Torque	0.8 - 1 N.m 7.1 - 8.9 lb.in
Disconnect device Tool	Flat screwdriver Ø 3.5 mm
Torque	0.8 - 1.3 N.m 3/5 - 5.3 lb.in

CE	RoHS	USR	CSA	Gost R															
----	------	-----	-----	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Accessories

Description	Color	Type	Order code	Pkg	Weight
1 End stops	Grey	BAM2	1SNA206351R1600	50	12.00
2 End sections	Grey	BADL	1SNA399903R0200	50	4.70
3 Jumper bars		FEMT2	1SNA113629R2700	10	2.00
4 Fastening kits		BJS8-20	1SNA174789R0500	5	3.20
5 Lateral jumper bars 50 A		EV8S	1SNA168401R0300	20	3.00
	Black	PC8-10	1SNA163313R2400	10	14.00
		PC8-R1	1SNA400711R0600	10	6.60
		PC8-R2	1SNA400712R0700	10	7.84
		PC8-R3	1SNA400713R0000	10	9.00
		PC8-R4	1SNA400724R0300	10	4.50
6 Circuit separators	Grey	SCFT2	1SNA114522R0500	20	
7 Test sockets	Yellow	AJS9	1SNA179726R0200	25	5.00
	Black	AJS9-1	1SNA206680R1500	25	3.60
	Green	AJS9-2	1SNA206681R0200	25	3.60
	Grey	AJS9-3	1SNA206682R0300	25	3.60
	Blue	AJS9-4	1SNA206683R0400	25	3.60
	Red	AJS9-5	1SNA206720R1400	25	3.60
		AL4-M3	1SNA206721R0100	50	1.10
8 Test plugs	Red	FC4-1	1SNA167927R1000	10	11.00
9 Short circuit bridges	Yellow	SC-JB8-2	1SNK900652R0000	25	2.00
		SC-JB8-3	1SNK900653R0000	25	3.40
		SC-JB8-4	1SNK900654R0000	25	4.70





Feed-through screw clamp terminal blocks

Description	Color	Type	Order code	Pkg	Weight
Feed-through	Grey	M6/8.ST7	1SNA115243R2600	25	20.00


M6/8.ST screw clamp terminal blocks

Test disconnect with a screwdriver sliding link

8 mm 0.315 in spacing



M6/8.ST



8 mm 0.315 in spacing

Description

- Secure your disconnect operations with the disconnect sliding link operated with a screwdriver,
- Ease your test operations with the 2 independent built-in test sockets compatible with DIA 4 mm 0.157 in test plugs.

Ordering details

Description	Color	Type	Order code	Pkg	Weight
Disconnect With 2 test sockets DIA 4 mm 0.157 in	Grey	M6/8.ST1	1SNA115237R1000	25	30.00

Main technical data

Connecting capacity	IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded Flexible with insulated ferrule Gauge	0.5-10 mm² 0.5-6 mm² A5	18 - 8 AWG 18-8 AWG
Rated current / Rated cross section	40 A / 6 mm²	30 A / 8 AWG	30 A / 8 AWG
Rated short-time withstand current (1s)	720 A		
Rated voltage	630 V	150 V	150 V
Impulse withstand voltage			
Protection		NEMA	



Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		13 mm 0.51 in
Screw clamp Tool		Flat screwdriver Ø 5 mm Ø 0.197
Torque		0/8 - 1 N.m 7.1 - 8.9 lb.in
Disconnect device Tool		Flat screwdriver Ø 3.5 mm
Torque		0.04 - 0.86 N.m 3/16 - 5.3 lb.in

CE	RoHS	UL	CSA	Gost R															
----	------	----	-----	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Accessories

Description	Color	Type	Order code	Pkg	Weight
1 End stops 10 mm 0.394 in 9 mm 0.354 in	Grey	BAM2	1SNA206351R1600	50	12.00
2 End sections 1 mm 0.039 in	Grey	FEMT2	1SNA113629R2700	10	2.00
3 Lateral jumper bars 50 A	Black	PC8-10	1SNA163313R2400	10	14.00
		PC8-R1	1SNA400711R0600	10	6.60
		PC8-R2	1SNA400712R0700	10	7.84
		PC8-R3	1SNA400713R0000	10	9.00
		PC8-R4	1SNA400724R0300	10	4.50
4 Circuit separators 3 mm 0.118 in	Grey	SCFT2	1SNA114522R0500	20	
5 Test plugs DIA 4 mm 0.157 in IP20	Red	FC4-1	1SNA167927R1000	10	11.00
6 Short circuit plugs DIA 4 mm 0.157 in		BP8-A4	1SNA173888R2000	10	
7 Terminal block markers Blank card	White	RC810	1SNA234000R0200	1	8.20

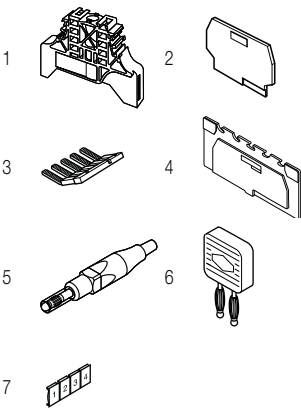


Feed-through screw clamp terminal blocks

Description	Color	Type	Order code	Pkg	Weight
Feed-through Profile aligned with M6/8.ST...	Grey	M6/8.ST7	1SNA115243R2600	25	20.00


M6/8.ST screw clamp terminal blocks

Test disconnect with insulated rod sliding link

8 mm 0.315 in spacing



M6/8.ST



8 mm 0.315 in spacing

Description

- Secure your disconnect operations with the disconnect sliding link operated with a screwdriver,
- Ease your test operations with the two independent built-in test sockets compatible with DIA 4 mm 0.157 in test plugs.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect With 2 test sockets DIA 4 mm 0.157 in	Grey	M6/8.ST3	1SNA115239R2200	25	30.00

Main technical data

Connecting capacity	IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded Flexible with insulated ferrule Gauge	0.5-10 mm² 0.5-6 mm² A5	18 - 8 AWG 18-8 AWG
Rated current / Rated cross section	40 A / 6 mm²	30 A / 8 AWG	30 A / 8 AWG
Rated short-time withstand current (1s)	720 A		
Rated voltage	630 V	150 V	150 V
Impulse withstand voltage			
Protection		NEMA	


Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		
Screw clamp Tool		Flat screwdriver Ø 5 mm Ø 0.197
Torque		0.8 - 1 N.m 7.1 - 8.9 lb.in
Disconnect device Tool		Flat screwdriver Ø 3.5 mm
Torque		0.8 - 1 N.m 3/5 - 5.3 lb.in

CE	RoHS	USR	CSA	Gost R															
CE	RoHS	USR	CSA	Gost R															


Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 10 mm 0.394 in	Grey	BAM2	1SNA206351R1600	50	12.00
9 mm 0.354 in		BADL	1SNA399903R0200	50	4.70
2 End sections 1 mm 0.039 in	Grey	FEMT2	1SNA113629R2700	10	2.00
3 Lateral jumper bars 50 A	Black	PC8-10	1SNA163313R2400	10	14.00
		PC8-R1	1SNA400711R0600	10	6.60
		PC8-R2	1SNA400712R0700	10	7.84
		PC8-R3	1SNA400713R0000	10	9.00
		PC8-R4	1SNA400724R0300	10	4.50
4 Circuit separators 3 mm 0.118 in	Grey	SCFT2	1SNA114522R0500	20	
5 Test plugs DIA 4 mm 0.157 in IP20	Red	FC4-1	1SNA167927R1000	10	11.00
6 Short circuit plugs DIA 4 mm 0.157 in		BP8.A4	1SNA173888R2000	10	
7 Terminal block markers Blank card	White	RC810	1SNA234000R0200	1	8.20

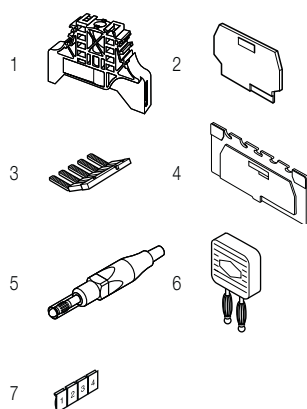

Feed-through screw clamp terminal blocks



Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through Profile aligned with M6/8.ST...	Grey	M6/8.ST7	1SNA115243R2600	25	20.00




M6/8.ST screw clamp terminal blocks

Test disconnect with a screwdriver sliding link

8 mm 0.315 in spacing



M6/8.ST



8 mm 0.315 in spacing

Description

- Terminal blocks especially designed for current transformers circuits:
- Easy and secured current measurement thanks to the two built-in test yellow sockets compatible with IP20 DIA 4 mm 0.157 in test plugs,
 - Convenient short-circuit operations with the PCS sliding short circuiting bridges from 2 to 4 poles,
 - Tests sockets available as well in black, green, grey and blue.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect With two yellow test sockets DIA 4 mm 0.157 in	Grey	M6/8.ST1.IP20	1SNA115971R1000	25	40.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5 - 10 mm ²	18 - 8 AWG	18 - 8 AWG
	Flexible with insulated ferrule	0.5 - 6 mm ²		
	Gauge	A5		
Rated current / Rated cross section		40 A / 6 mm ²	30 A / 8 AWG	30 A / 8 AWG
Rated short-time withstand current (1s)		720 A		
Rated voltage		630 V	150 V	150 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	


Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		13 mm 0.51 in
Screw clamp Tool		Flat screwdriver Ø 3.5 mm
Torque		0.8 13.9 N.m 7/1 - 8.9 lb.in
Disconnect device Tool		Flat screwdriver Ø 3.5 mm
Torque		0.8 13.9 N.m 7/1 - 8.9 lb.in
Test socket Tool		Flat screwdriver Ø 3.5 mm
Torque		0.8 13.9 N.m 7/1 - 8.9 lb.in

CE	RoHS	USF	CSA	GoS R
----	------	-----	-----	-------

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BAM2	1SNA206351R1600	50	12.00
		BADL	1SNA399903R0200	50	4.70
2 End sections	Grey	FEMT2	1SNA113629R2700	10	2.00
3 Lateral jumper bars 50 A	Black	PC8-10	1SNA163313R2400	10	14.00
		PC8-R1	1SNA400711R0600	10	6.60
		PC8-R2	1SNA400712R0700	10	7.84
		PC8-R3	1SNA400713R0000	10	9.00
		PC8-R4	1SNA400724R0300	10	4.50
		PC8-R5	1SNA400725R0300	10	4.50
4 Test sockets	Black	AJS9-1	1SNA206680R1500	25	3.60
	Green	AJS9-2	1SNA206681R0200	25	3.60
	Grey	AJS9-3	1SNA206682R0300	25	3.60
	Blue	AJS9-4	1SNA206683R0400	25	3.60
	Red	AJS9-5	1SNA206720R1400	25	3.60
5 Test plugs	Red	FC4-1	1SNA167927R1000	10	11.00
6 Short circuit bridges	Yellow	SC-JB8-2	1SNK900652R0000	25	2.00
		SC-JB8-3	1SNK900653R0000	25	3.40
		SC-JB8-4	1SNK900654R0000	25	4.70
		SC-JB8-5	1SNK900655R0000	25	4.70
7 Terminal block markers	White	RC810	1SNA234000R0200	1	8.20





Feed-through screw clamp terminal blocks


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through Profile aligned with M6/8.ST...	Grey	M6/8.ST7	1SNA115243R2600	25	20.00

M6/8.ST screw clamp terminal blocks

Feed-through - 8 mm 0.315 in spacing



M6/8.ST



8 mm 0.315 in spacing

Description

Profile aligned with M6/8 ST.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Grey ☐	M6/8.ST7	1SNA115243R2600	25	20.00


Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-10 mm²	18 - 8 AWG	18-8 AWG
	Flexible	0.5-6 mm²		
	with insulated ferrule			
Gauge		A5		
Rated current / Rated cross section		40 A / 6 mm²	40 A / 8 AWG	40 A / 8 AWG
Rated short-time withstand current (1s)		720 A		
Rated voltage		630 V	150 V	150 V
Impulse withstand voltage Protection			NEMA	

Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		13 mm 0.51 in
Tool		Flat screwdriver Ø 5 mm Ø 0.197 in
Torque		0.8 - 1 N.m 7.1 - 8.9 lb.in

CE	RoHS	USR	CSA	Gost R															
----	------	-----	-----	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

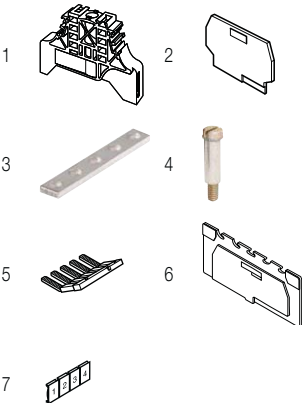

Accessories

Description		Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	10 mm 0.394 in	Grey ☐	BAM2	1SNA206351R1600	50	12.00
	9 mm 0.354 in		BADL	1SNA399903R0200	50	4.70
2 End sections	1 mm 0.039 in	Grey ☐	FEMT2	1SNA113629R2700	10	2.00
3 Jumper bars	20 poles 41 A		BJ8-20	1SNA174789R0500	5	3.20
4 Fastening kits	Sub assembly post + screw + washer		EV8S	1SNA168401R0300	20	3.00
5 Lateral jumper bars	2 poles 50 A	Black ☐	PC8-2	1SNA116538R1700	10	3.00
	3 poles		PC8-3	1SNA116539R1000	10	4.00
	4 poles		PC8-4	1SNA116540R2500	10	6.00
	10 poles		PC8-10	1SNA163313R2400	10	14.00
			PC8-R1	1SNA400711R0600	10	6.60
			PC8-R2	1SNA400712R0700	10	7.84
			PC8-R3	1SNA400713R0000	10	9.00
			PC8-R4	1SNA400724R0300	10	4.50
6 Circuit separators	3 mm 0.118 in	Grey ☐	SCFT2	1SNA114522R0500	20	
7 Terminal block markers	Blank card	White ☐	RC810	1SNA234000R0200	1	8.20