


MA2.5/5 screw clamp terminal blocks

Feed-through - 5 mm 0.197 in spacing



MA2.5/5



5 mm 0.197 in spacing

Description

- Flexibility: snap onto symmetrical and asymmetrical rails,
- Many colors are available in addition to our generic grey, to help you quickly identify any of specific functions.

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Grey	MA2.5/5	1SNA115486R0300	50	6.61
	Blue	MA2.5/5.N	1SNA125486R0500	50	6.61
	Orange	MA2.5/5	1SNA105075R2000	50	6.61
	Yellow	MA2.5/5	1SNA105486R1200	50	6.61
	Red	MA2.5/5	1SNA400184R2700	50	6.61
	White	MA2.5/5	1SNA105052R2100	50	6.61
	Black	MA2.5/5	1SNA105077R2200	50	6.61
	Beige	MA2.5/5	1SNA195486R0400	50	6.61

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.2-4 mm²	22-12 AWG	22-12 AWG
	Flexible	0.22-2.5 mm²		
	with insulated ferrule			
Gauge		A3		
Rated current / Rated cross section		24 A / 2.5 mm²	30 A / 12 AWG	25 A / 12 AWG
Rated short-time withstand current (1s)		300 A		
Rated voltage		1000 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	

Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		10 mm 0.39 in
Tool		Flat screwdriver Ø 3.5 mm Ø 0.137 in
Torque		0.4 - 0.6 N.m 3.5 - 5.3 lb.in

CE	RoHS	USR CNR	cCSAus	Gost R															
----	------	---------	--------	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	10 mm	BAM2	50	12.00
		9 mm	BADL	50	4.70
2 End sections	Grey	2.8 mm	FEM6	20	2.40
3 Jumper bars		2 poles	BJMI5-2	10	3.30
		3 poles	BJMI5-3	10	5.00
		4 poles	BJMI5-4	10	6.70
		5 poles	BJMI5-5	10	8.40
		10 poles	BJMI5-10	10	16.90
		30 A	PC5-2	10	1.80
4 Lateral jumper bars	Grey	10 poles	PC5-10	10	6.00
5 Cross spacing jumpers		5 mm 0.200 in - 6 mm 0.236 in - 8 mm 0.315 in	EL6	10	0.10
6 Insulating tips		For lateral jumper bars type PC...	EIP	10	
7 Circuit separators	Grey	3 mm	SCFM6	20	4.00
		0 mm	SCMA5	10	
		0.118 in	SCFCV1-2	10	8.00
		3 mm	SCF6	20	
			CBM5	50	
8 Shield connectors			CPV1-2	1	
9 Protecting covers	Transparent	Length 1 m 39 in	CPM	1	
		Length 500 mm 19.70 in	RC510	1	5.20
10 Terminal block markers	White	Blank card			


Ground screw clamp terminal blocks

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	MA2.5/5.P	1SNA165488R2700	50	18.00

MA2.5/5 screw clamp terminal blocks

Feed-through - 5 mm 0.197 in spacing

		2.5 mm² 12 AWG
---	---	--



5 mm 0.197 in spacing



With partition

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through With partition	Grey	MA2.5/5.1	1SNA115485R0200	50	6.61
	Blue	MA2.5/5.1	1SNA125485R0400	50	6.61

Main technical data	IEC	UL	CSA	Nota
Rated voltage	1000 V	600 V	600 V	
Impulse withstand voltage	8000 V			
Protection	IP20	NEMA 1		

																			
CE	RoHS	UL	CSA	Gost R															

Accessories


Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 Test sockets DIA 2 mm 0.079 in		AL2	1SNA163046R2400	50	0.90
2 Test plugs DIA 2 mm 0.079 in	Black	FC2	1SNA007865R2600	100	

Feed-through - 6 mm 0.236 in spacing



M4/6 screw clamp terminal blocks

Feed-through - 6 mm 0.236 in spacing



6 mm 0.236 in spacing



With partition

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through With partition	Grey	M4/6.1	1SNA115259R0600	50	8.20
	Orange	M4/6.1	1SNA105208R1300	50	8.20

Main technical data	IEC	UL	CSA	Nota
Rated voltage	1000 V	600 V	600 V	
Impulse withstand voltage	8000 V			
Protection	IP20	NEMA 1		

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 Test sockets		AL2	1SNA163043R2100	50	0.90
		AL3	1SNA163261R0000	50	1.20
		AL4-M3	1SNA206721R0100	50	1.10
2 Test plugs	Black	FC2	1SNA007865R2600	100	

With test socket DIA 2 mm 0.079 in

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through With test socket DIA 2 mm 0.079 in	Grey	M4/6.2	1SNA115217R1400	50	8.20

Main technical data	IEC	UL	CSA	Nota
Rated voltage	800 V	600 V	600 V	
Impulse withstand voltage	8000 V			
Protection	IP20	NEMA 1		

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 Test plugs	Black	FC2	1SNA007865R2600	100	

With test socket DIA 4 mm 0.157 in

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through With test socket DIA 4 mm 0.157 in	Grey	M4/6.4	1SNA115192R0400	50	8.20
	Beige	M4/6.4	1SNA195192R0500	50	8.20


Main technical data	IEC	UL	CSA	Nota
Rated voltage	800 V	600 V	600 V	
Impulse withstand voltage	8000 V			
Protection	IP20	NEMA 1		

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 Test plugs	White	FC4	1SNA167860R0100	10	

Feed-through - 6 mm 0.236 in spacing









Description				Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1	End stops	10 mm	0.394 in	Grey 	BAM2	1SNA206351R1600	50	12.00
		9 mm	0.354 in		BADL	1SNA399903R0200	50	4.70
2	End sections	3 mm	0.118 in	Grey 	FEM3A	1SNA116576R1500	20	3.30
3	Jumper bars	2 poles	32 A		BJMI6-2	1SNA176663R0000	10	4.40
		3 poles		BJMI6-3	1SNA176664R0100	10	6.70	
		4 poles		BJMI6-4	1SNA176665R0200	10	8.90	
		5 poles		BJMI6-5	1SNA176666R0300	10	11.20	
		10 poles		BJMI6-10	1SNA176667R0400	10	22.40	
		4	Lateral jumper bars	2 poles	35 A	Grey 	PC6-2	1SNA113546R1400
10 poles				PC6-10	1SNA113548R2600		10	8.00
5	Cross spacing jumpers	5 mm 0.200 in - 6 mm 0.236 in - 8 mm 0.315 in			EL6	1SNA173627R2100	10	0.10
		Universal screw jumper bar kit N°I			BJDP1	1SNA179623R0300	10	7.00
		Universal screw jumper bar kit N°III			BJDP3	1SNA179625R0500	10	5.00
6	Insulating tips	For lateral jumper bars type PC...			EIP	1SNA113550R2400	10	
7	Circuit separators	0 mm	0 in	Grey 	SCM6	1SNA113003R1000	10	0.30
8	Test sockets	DIA 2 mm 0.079 in			AL2	1SNA163043R2100	50	0.90
		DIA 3 mm 0.120 in			AL3	1SNA163261R0000	50	1.20
9	Terminal block markers	Blank card		White 	RC610	1SNA233000R0100	1	7.50


Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with M4/6.3A.P...	Green-yellow 	M4/6.3A.P	1SNA195637R1200	50	22.00

M4/6.4A screw clamp terminal blocks



Feed-through - 6 mm 0.236 in spacing



M4/6.4A



6 mm 0.236 in spacing

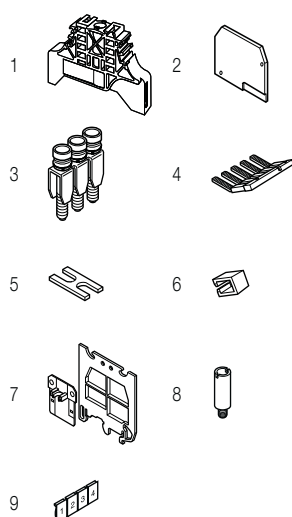

Description

- Ease one potential distribution on 4 independent screw clamps,
- Flexibility: snap onto symmetrical and asymmetrical rails.

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Grey	M4/6.4A	1SNA115479R2300	50	20.00
	Blue	M4/6.4A.N	1SNA125479R2500	50	20.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.2-4 mm²	22-10 AWG	12 AWG
	Flexible	0.22-4 mm²		
	with insulated ferrule			
	Gauge	A4		
Rated current / Rated cross section		32 A / 4 mm²	20 A / 10 AWG	25 A / 12 AWG
Rated short-time withstand current (1s)		480 A		
Rated voltage		800 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	

Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.5 - 0.8 N.m 4.4 - 7.1 lb.in

CE	RoHS	USR	CSA	Gost R															
CE	RoHS	USR	CSA	Gost R															


Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	10 mm	BAM2	50	12.00
		9 mm	BADL	50	4.70
2 End sections	Grey	3 mm	FEM4A	20	3.80
3 Jumper bars		2 poles	BJMI6-2	10	4.40
		3 poles	BJMI6-3	10	6.70
		4 poles	BJMI6-4	10	8.90
		5 poles	BJMI6-5	10	11.20
		10 poles	BJMI6-10	10	22.40
		35 A	PC6-2	10	2.00
4 Lateral jumper bars	Grey	10 poles	PC6-10	10	8.00
		5 mm 0.200 in - 6 mm 0.236 in - 8 mm 0.315 in	EL6	10	0.10
		Universal screw jumper bar kit N°I	BJDP1	10	7.00
		Universal screw jumper bar kit N°III	BJDP3	10	5.00
5 Cross spacing jumpers			EIP	10	1.35
6 Insulating tips		For lateral jumper bars type PC...	SCM6	10	0.30
7 Circuit separators	Grey	0 mm	AL2	50	0.90
8 Test sockets		DIA 2 mm 0.079 in	AL3	50	1.20
		DIA 3 mm 0.120 in	RC610	1	7.50
9 Terminal block markers	White	Blank card			


Ground screw clamp terminal blocks

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	M4/6.4A.P	1SNA195638R2300	50	22.00

M6/8 screw clamp terminal blocks
Feed-through - 8 mm *0.315 in* spacing



M6/8



8 mm 0.315 in spacing

Description

- Flexibility: snap onto symmetrical and asymmetrical rails,
- Many colors are available in addition to our generic grey, to help you quickly identify any of specific functions.

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce)
Feed-through	Grey 	M6/8	1SNA115118R1100	50	12.80
	Blue 	M6/8.N	1SNA125118R1300	50	12.80
	Orange 	M6/8	1SNA105004R2200	50	12.80
	Yellow 	M6/8	1SNA105118R2000	50	12.80
	Red 	M6/8	1SNA400186R2100	50	12.80
	White 	M6/8	1SNA400187R2200	50	12.80
	Black 	M6/8	1SNA400239R1500	50	12.80
	Beige 	M6/8	1SNA195118R1200	50	12.80

Main technical data

Connecting capacity		IEC	UL	CSA	Rail		G32, TH 35-7.5, TH 35-15
1 conductor per clamp	Rigid - Solid / Stranded	0.5-10 mm²	22-8 AWG	24-8 AWG	Wire stripping length		12 mm 0.47 in
	Flexible with insulated ferrule	0.5-6 mm²					
	Gauge	A5			Tool		Flat screwdriver Ø 4 - 5 mm Ø 0.157 - 0.197 in
Rated current / Rated cross section		41 A / 6 mm²	50 A / 8 AWG	50 A / 8 AWG	Torque		0.8 - 1 N.m 7.1 - 8.9 lb.in
Rated short-time withstand current (1s)		720 A					
Rated voltage		1000 V	600 V	600 V			
Impulse withstand voltage		8000 V					
Protection		IP20	NEMA 1				



Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		12 mm 0.47 in
Tool		Flat screwdriver Ø 4 - 5 mm Ø 0.157 - 0.197 in
Torque		0.8 - 1 N.m 7.1 - 8.9 lb.in



Accessories


Description				Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1	End stops	10 mm	0.394 in	Grey 	BAM2	1SNA206351R1600	50	12.00
		9 mm	0.354 in		BADL	1SNA399903R0200	50	4.70
2	End sections	2.8 mm	0.110 in	Grey 	FEM6	1SNA118368R1600	20	2.40
3	Jumper bars	2 poles	41 A		BJMI8-2	1SNA176669R1600	10	4.50
		3 poles		BJMI8-3	1SNA176670R1300	10	6.00	
		4 poles		BJMI8-4	1SNA176671R0000	10	10.00	
		5 poles		BJMI8-5	1SNA176672R0100	10	12.22	
		10 poles		BJMI8-10	1SNA176673R0200	10	20.00	
4	Lateral jumper bars	2 poles	50 A		PC8-2	1SNA116538R1700	10	3.00
		10 poles			PC8-10	1SNA163313R2400	10	
5	Cross spacing jumpers	5 mm 0.200 in - 6 mm 0.236 in - 8 mm 0.315 in			EL6	1SNA173627R2100	10	0.10
		Universal screw jumper bar kit N°I			BJDP1	1SNA179623R0300	10	7.00
		Universal screw jumper bar kit N°III			BJDP3	1SNA179625R0500	10	5.00
6	Circuit separators	0 mm	0 in	Grey 	SCM6	1SNA113003R1000	10	0.30
		3 mm	0.118 in		SCFM6	1SNA114825R0500	20	4.00
					SCFCV1-2	1SNA116795R1100	10	8.00
					SCF6	1SNA118707R0300	20	
7	Protecting covers	Length 1 m 39 in		Transparent 	CPV1-2	1SNA176816R1200	1	
		Length 500 mm 19.70 in			CPM	1SNA187312R1400		
8	Terminal block markers	Blank card		White 	RC810	1SNA234000R0200	1	8.20

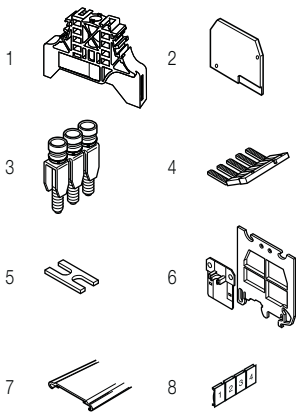

Ground screw clamp terminal blocks

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with M6/8...	Green-yellow 	M6/8.P	1SNA165114R1700	50	26.00

Feed-through - 8 mm 0.315 in spacing



Ordering details

CE RoHS RoHS ULR CSA Gost R

Accessories

Description			Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1	Test sockets	DIA 2 mm <i>0.079 in</i>		AL2	1SNA163043R2100	50	0.90
		DIA 3 mm <i>0.120 in</i>		AL3	1SNA163261R0000	50	1.20
		DIA 4 mm <i>0.157 in</i>		AL4-M3	1SNA206721R0100	50	1.10
2	Test plugs	DIA 2 mm <i>0.079 in</i>	Black 	FC2	1SNA007865R2600	100	
		DIA 4 mm <i>0.157 in</i>	White 	FC4	1SNA167860R0100	10	10.00
3	Short circuit plugs	DIA 4 mm <i>0.157 in</i>		BP8.A4	1SNA173888R2000	10	

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through With test socket DIA 2 mm 0.079 in	Grey 	M6/8.2	1SNA115218R2500	50	12.80

Main technical data	IEC	UL	CSA
Rated voltage	800 V	600 V	600 V
Impulse withstand voltage	8000 V		
Protection	IP20	NEMA 1	

CE RoHS RoHS USR CSA Gost R

Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 Test plugs <i>DIA 2 mm 0,079 in</i>	Black 	FC2	1SNA007865R2600	100	

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through With test socket DIA 4 mm Ø 157 in	Grey	M6/8.4	1SNA115219R2600	50	12.80

Main technical data	IEC	UL	CSA
Rated voltage	800 V	600 V	600 V
Impulse withstand voltage	8000 V		
Protection	IP10	NEMA	


CE RoHS RoHS ULR CSA PG Gost R

Accessories


Description		Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1	Test plugs DIA 4 mm 0.157 in	White ☐	FC4	1SNA167860R0100	10	10.00
2	Short circuit plugs DIA 4 mm 0.157 in		BP8.A4	1SNA173888R2000	10	

M10/10 screw clamp terminal blocks

Feed-through - 10 mm 0.394 in spacing



M10/10



10 mm 0.394 in spacing

Description

- Flexibility: snap onto symmetrical and asymmetrical rails,
- Many colors are available in addition to our generic grey, to help you quickly identify any of specific

functions. Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Grey	M10/10	1SNA115120R1700	50	17.20
	Blue	M10/10.N	1SNA125120R1100	50	17.20
	Yellow	M10/10	1SNA105120R2600	50	17.20
	Red	M10/10	1SNA400189R0400	50	17.20
	White	M10/10	1SNA400190R0100	50	17.20
	Black	M10/10	1SNA400188R0300	50	17.20
	Beige	M10/10	1SNA195120R1000	50	17.20

Main technical data

Connecting capacity		IEC	UL	CSA	Rail	G32, TH 35-7.5, TH 35-15
1 conductor per clamp	Rigid - Solid / Stranded	0.5-16 mm²	20-6 AWG	22-6 AWG	Wire stripping length	12 mm 0.47 in
	Flexible with insulated ferrule	0.5-10 mm²				
	Gauge	B6			Tool	Flat screwdriver Ø 5.5 - 6 mm Ø 0.217 - 0.236 in
Rated current / Rated cross section		57 A / 10 mm²	65 A / 6 AWG	70 A / 6 AWG	Torque	1.2 - 1.4 N.m 10.6 - 12.4 lb.in
Rated short-time withstand current (1s)		1200 A				
Rated voltage		1000 V	600 V	600 V		
Impulse withstand voltage		8000 V				
Protection		IP20	NEMA 1			

CE	RoHS	USR	CSA	Gost R															
----	------	-----	-----	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BAM2	1SNA206351R1600	50	12.00
		BADL	1SNA399903R0200	50	4.70
2 End sections	Grey	FEM6	1SNA118368R1600	20	2.40
3 Jumper bars		2 poles	BJMI10-2	50	5.00
		3 poles	BJMI10-3	10	8.00
		4 poles	BJMI10-4	10	11.00
		5 poles	BJMI10-5	10	13.00
		10 poles	BJMI10-10	10	27.00
		10 poles	PC10-10	10	
4 Lateral jumper bars		70 A	1SNA163315R2600	10	
5 Cross spacing jumpers		Universal screw jumper bar kit N°I	BJDP1	10	7.00
		Universal screw jumper bar kit N°III	BJDP3	10	5.00
6 Circuit separators	Grey	0 mm	SCM6	10	0.30
		3 mm	SCFM6	20	4.00
			SCFCV1-2	10	8.00
			SCF6	20	
7 Protecting covers	Transparent	Length 1 m 39 in	CPV1-2	1	
		Length 500 mm 19.70 in	CPM	1	
8 Terminal block markers	White	Blank card	RC1010	1	1.30



Ground screw clamp terminal blocks

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Ground	Green-yellow	M10/10.P	1SNA165115R1000	50	29.00


M10/10 screw clamp terminal blocks

Feed-through - 10 mm 0.394 in spacing



10 mm²

6 AWG



10 mm 0.394 in spacing



With partition

Ordering details

Description	Colour	Type	Order code	Pkg	Weight
Feed-through With partition	Grey 	M10/10.1	1SNA115261R2000	50	17.20

Main technical data	IEC	UL	CSA	Nota
Rated voltage	1000 V	600 V	600 V	
Impulse withstand voltage	8000 V			
Protection	IP20	NEMA 1		



 CE	 RoHS	 UL	 CSA	 Gost R										
--	--	--	---	--	--	--	--	--	--	--	--	--	--	--

Accessories


Description	Colour	Type	Order code	Pkg	Weight
				qty	(1 pce) g
1 Test sockets		AL2	1SNA163043R2100	50	0.90
		AL3	1SNA163261R0000	50	1.20
		AL4-M3	1SNA206721R0100	50	1.10
2 Test plugs	Black 	FC2	1SNA007865R2600	100	
	White 	FC4	1SNA167860R0100	10	

M16/12 screw clamp terminal blocks

Feed-through - 12 mm 0.472 in spacing



M16/12



12 mm 0.472 in spacing

Description

- Flexibility: snap onto symmetrical and asymmetrical rails,
- Many colors are available in addition to our generic grey, to help you quickly identify any of specific functions,
- Use of jumper bars requires the user to cut out the partition.

Ordering details

Description	Colour	Type	Order code	Pkg	Weight
Feed-through With partition	Grey	M16/12	1SNA115129R1400	20	26.12
	Blue	M16/12.N	1SNA125129R1600	20	26.12
	Yellow	M16/12	1SNA105129R2300	20	26.12
	Red	M16/12	1SNA400192R2700	20	26.12
	White	M16/12	1SNA400193R2000	20	26.12
	Black	M16/12	1SNA400191R2600	20	26.12
	Beige	M16/12	1SNA195129R1500	20	26.12

Main technical data

Connecting capacity	IEC	UL	CSA
1 conductor per clamp			
Rigid - Solid / Stranded	2.5-25 mm²	18-4 AWG	14-4 AWG
Flexible with insulated ferrule	2.5-16 mm²		
Gauge	B7		
Rated current / Rated cross section	76 A / 16 mm²	85 A / 4 AWG	85 A / 4 AWG
Rated short-time withstand current (1s)	1920 A		
Rated voltage	1000 V	600 V	600 V
Impulse withstand voltage	8000 V		
Protection	IP20	NEMA 1	

Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		14 mm 0.55 in
Tool		Flat screwdriver Ø 5.5 mm Ø 0.22 in
Torque		1.2 - 1.4 N.m 10.6 - 12.4 lb.in

CE	RoHS	USR	CSA	Gost R															
----	------	-----	-----	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--


Accessories

Description	Colour	Type	Order code	Pkg	Weight
1 End stops	Grey	BAM2	1SNA206351R1600	50	12.00
		BADL	1SNA399903R0200	50	4.70
2 End sections	Grey	FEM12	1SNA118618R0100	20	3.20
3 Jumper bars		2 poles	BJMI12-2	10	6.00
		3 poles	BJMI12-3	10	9.00
		4 poles	BJMI12-4	10	13.00
		5 poles	BJMI12-5	10	16.00
		10 poles	BJMI12-10	10	33.00
4 Cross spacing jumpers		Universal screw jumper bar kit N°II	BJDP2	10	6.00
		Universal screw jumper bar kit N°III	BJDP3	10	5.00
5 Circuit separators	Grey	SCF12	1SNA113102R1000	20	2.00
		SCFM6	1SNA114825R0500	20	4.00
		SCFCV1-2	1SNA116795R1100	10	8.00
6 Test sockets		DIA 2 mm 0.079 in	AL2	50	0.90
		DIA 3 mm 0.120 in	AL3	50	1.20
		DIA 4 mm 0.157 in	AL4-M3	50	1.10
7 Test plugs	Black	FC2	1SNA007865R2600	100	
	White	FC4	1SNA167860R0100	10	
8 Protecting covers	Transparent	CPV1-2	1SNA176816R1200	1	
		CPM	1SNA187312R1400	1	
9 Terminal block markers	White	RC1010	1SNA238000R1600	1	1.30

Ground screw clamp terminal blocks

Description	Colour	Type	Order code	Pkg	Weight
Ground	Green-yellow	M16/12.P	1SNA165130R2300	20	40.00

Feed-through - 16 mm 0.630 in spacing




- Closed terminal block: no end section needed, optimized rigidity,
- Flexibility: snap onto symmetrical and asymmetrical rails,
- Use of jumper bars requires the user to cut out the partition.

Description		Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through	Closed block with partition	Grey	M35/16	1SNA115124R0700	20	50.00
		Blue	M35/16.N	1SNA125124R0100	20	50.00
		Yellow	M35/16	1SNA105124R1600	20	50.00
		Red	M35/16	1SNA400195R2200	20	50.00
		White	M35/16	1SNA400196R2300	20	50.00
		Black	M35/16	1SNA400194R2100	20	50.00
		Beige	M35/16	1SNA195124R0000	20	50.00

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	6-50 mm ²	10-0 AWG	10-0 AWG
	Flexible	6-35 mm ²		
	with insulated ferrule			
	Gauge	B9		
Rated current / Rated cross section		125 A / 35 mm ²	150 A / 0 AWG	150 A / 0 AWG
Rated short-time withstand current (1s)		4200 A		
Rated voltage		1000 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP10	NEMA	

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		17 mm 0.669 in
Tool		Flat screwdriver Ø 6.5 - 7 mm Ø 0.255 - 0.276 in
Torque		2.8 - 3 N.m 24.9 - 26.7 lb.in



Description			Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1	End stops	10 mm <i>0.394 in</i>	Grey	BAM2	1SNA206351R1600	50	12.00
		9 mm <i>0.354 in</i>		BADL	1SNA399903R0200	50	4.70
2	Jumper bars	2 poles 125 A	Orange	JB16-2	1SNK916302R0000	10	10.20
		3 poles		JB16-3	1SNK916303R0000	10	16.00
		4 poles		JB16-4	1SNK916304R0000	10	21.80
		5 poles		JB16-5	1SNK916305R0000	10	27.60
		10 poles		JB16-10	1SNK916310R0000	10	56.60
3	Cross spacing jumpers	Universal screw jumper bar kit N°I		BJDP1	1SNA179623R0300	10	7.00
		Universal screw jumper bar kit N°II		BJDP2	1SNA179624R0400	10	6.00
4	Circuit separators	3 mm <i>0.118 in</i>	Grey	SCFCV1-2	1SNA116795R1100	10	8.00
5	Test sockets	DIA 4 mm <i>0.157 in</i>		AL4-M4	1SNA206723R0300	50	1.30
6	Test plugs	DIA 4 mm <i>0.157 in</i>	White	FC4	1SNA167860R0100	10	
7	Protecting covers	Length 1 m <i>39 in</i>	Transparent	CPV1-2	1SNA176816R1200	1	
8	Terminal block markers	Blank card	White	RC1010	1SNA238000R1600	1	1.30


Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with M35/16...	Green-yellow	M35/16.P	1SNA165111R1400	20	50.50

D70/22 screw clamp terminal blocks



Feed-through - 22 mm 0.866 in spacing



D70/22



22 mm 0.866 in spacing



SNA series - Terminal blocks

Description

- Closed terminal block: no end section needed, optimized rigidity,
- Use of jumper bars requires the user to cut out the partition.

Ordering details

Description	Colour	Type	Order code	Pkg	Weight
Feed-through Closed block	Grey	D70/22	1SNA400305R1000	10	158.10
	Blue	D70/22.N	1SNA400306R1100	10	158.10
	Yellow	D70/22.YL	1SNA400789R0000	10	158.10

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	16-95 mm²	4-00 AWG	4-00 AWG
	Flexible with insulated ferrule	16-70 mm²		
	Gauge	B11		
Rated current / Rated cross section		192 A / 70 mm²	159 A / 00 AWG	159 A / 00 AWG
Rated short-time withstand current (1s)		8400 A		
Rated voltage		1000 V	600 V	600 V
Impulse withstand voltage		8000 V		
Protection		IP10	NEMA	

Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		25 mm 0.98 in
Tool		Allen key Ø 6 mm 0.236 in
Torque		6 - 7 N.m 53.4 - 62.3 lb.in

CE	IEC	RoHS	UL	CSA	PG														
CE	CB	RoHS	USR CNR	CSA	Gost R														


Accessories

Description	Colour	Type	Order code	Pkg	Weight
1 End stops	Grey	BADH	1SNA116900R2700	50	24.00
2 Jumper bars		JB22-2	1SNK922302R0000	5	27.00
		JB22-3	1SNK922303R0000	5	43.30
		JB22-5	1SNK922305R0000	5	76.10
		JB22-10	1SNK922310R0000	5	157.40
3 Circuit separators	Grey	SCFCV4	1SNA116797R1300	10	
4 Protecting covers	Transparent	CPV4-5	1SNA176791R2100	1	
5 Terminal block markers	White	RC1010	1SNA238000R1600	1	1.30


Ground screw clamp terminal blocks

Description	Colour	Type	Order code	Pkg	Weight
Ground Profile aligned with D70/22...	Green-yellow	D70/22.P	1SNA400772R1300	10	222.00

Feed-through - 26 mm 1.024 in spacing



Rail		TH 35-7.5, TH 35-15
Wire stripping length		26 mm 1.02 in
Tool		Allen key Ø 6 mm Ø 0.236 in
Torque		9 - 9.5 N.m 79.5 - 83.9 lb.in




Description				Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1	End stops	12 mm	0.472 in	Grey	BADH	1SNA116900R2700	50	24.00
2	Jumper bars	2 poles	232 A		JB26-2	1SNK926302R0000	5	41.20
		3 poles		JB26-3	1SNK926303R0000	5	65.70	
		5 poles		JB26-5	1SNK926305R0000	5	115.70	
		10 poles		JB26-10	1SNK926310R0000	5	241.50	
		Blank card						
3	Terminal block markers			White	RC1010	1SNA238000R1600	1	1.30


Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Ground Profile aligned with D95/26...	Green-yellow	D95/26.P	1SNA400620R1700	10	278.00

D150/31.D10 screw clamp terminal blocks

Feed-through - 31 mm 1.220 in spacing

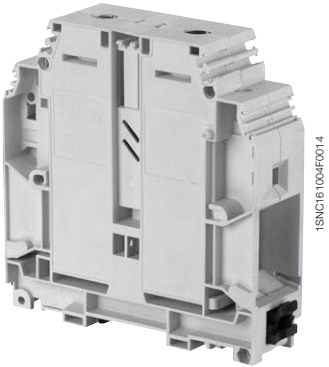

D150/31.D10



31 mm 1.220 in spacing

Description

- Use of jumper bars requires the user to cut-out the partition,
- Closed terminal block: no end section needed, optimized rigidity,
- Ease your voltage monitoring or distribution with the two built-in derivations.

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through Closed block with 2 x 10 mm ² derivations.	Grey	D150/31.D10	1SNA399715R0400	5	385.00
	Blue	D150/31.D10.N	1SNA399717R0600	5	385.00
	Yellow	D150/31.D10.YL	1SNA400778R0000	5	385.00

Main technical data


Connecting capacity	IEC	UL	CSA
Main circuit with 1 conductor per clamp	Rigid - Solid / Stranded Flexible with insulated ferrule Gauge B14	25-185 mm ² 35-150 mm ²	
Derivation with 1 conductor per clamp	Rigid - Solid / Stranded Flexible with insulated ferrule Gauge B6	0.5-16 mm ² 0.5-10 mm ²	
Rated current / Rated cross section			
Main circuit	309 A / 150 mm ²		
Derivation	57 A / 10 mm ²		
Rated short-time withstand current (1s)	18000 A		
Rated voltage	1000 V		
Impulse withstand voltage	12000 V		
Protection	IP10	NEMA	

Mounting instructions


Rail	TH 35-7.5, TH 35-15
Main circuit	
Wire stripping length	35 mm 1.37 in
Tool	Allen key Ø 8 mm Ø 0.315
Torque	10 - 15 N.m 89 - 132 lb.in
Derivation	
Wire stripping length	12 mm 0.47 in
Tool	Flat screwdriver Ø 4 mm Ø 0.157
Torque	1/2 - 1.4 N.m 10.6 - 12.3 lb.in

CE	RoHS	Gost R
----	------	--------

IP20 Protection with protecting cover

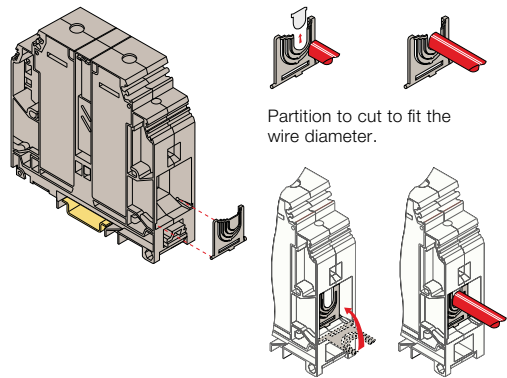

Locking foot operating with screwdriver DIA 4 0.157 in

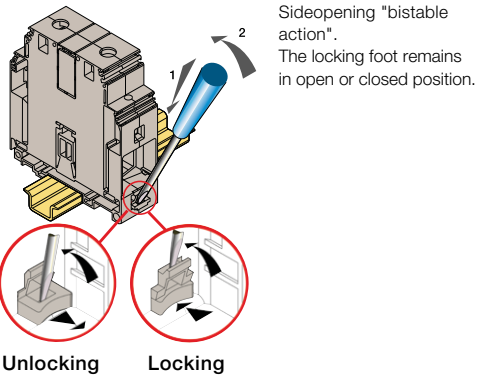

Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BADH	1SNA116900R2700	50	24.00
2 Jumper bars		BJMI31.2	1SNA206053R0700	1	120.00
		BJMI31.3	1SNA206054R0000	1	190.00
3 Protecting covers		CPBP1	1SNA399788R1600	20	
4 Terminal block markers	White	RC1010	1SNA238000R1600	1	1.30

D240/36.D10 screw clamp terminal blocks


Feed-through - 36 mm 1.417 in spacing



240 mm²



D240/36.D10



36 mm 1.417 in spacing

Description

- Closed terminal block: no end section needed, optimized rigidity,
- Ease your voltage monitoring or distribution with the 2 built-in derivations,
- Use of jumper bars requires the user to cut out the partition.

Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-through Closed block with 2 x 10 mm² derivations.	Grey	D240/36.D10	1SNA399704R1200	5	542.00
	Blue	D240/36.D10.N	1SNA399706R1400	5	542.00
	Yellow	D240/36.D10.YL	1SNA400779R0000	5	542.00

Main technical data



Connecting capacity	IEC	UL	CSA	Rail	TH 35-7.5, TH 35-15
Main circuit with 1 conductor per clamp	Rigid - Solid / Stranded	50-300 mm²		Main circuit	
	Flexible with insulated ferrule	35-240 mm²		Wire stripping length	35 mm 1.37 in
	Gauge	B14		Tool	Allen key Ø 8 mm 0.39
Derivation with 1 conductor per clamp	Rigid - Solid / Stranded	0.5-16 mm²		Torque	10 - 15 N.m 89 - 132 lb.in
	Flexible with insulated ferrule	0.5-10 mm²			
	Gauge	B6			
Rated current / Rated cross section				Derivation	
Main circuit		415 A / 240 mm²		Wire stripping length	12 mm 0.47 in
Derivation		57 A / 10 mm²		Tool	Flat screwdriver Ø 4 mm 0.157
Rated short-time withstand current (1s)		28800 A		Torque	1i2 - 1.4 N.m 10.6 - 12.3 lb.in
Rated voltage		1000 V			
Impulse withstand voltage Protection		8000 V			
		IP10	NEMA		

Mounting instructions



IP20 Protection with protecting cover

Locking foot operating with screwdriver DIA 4 0.157 in

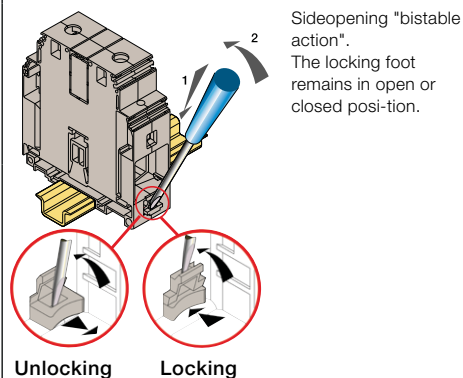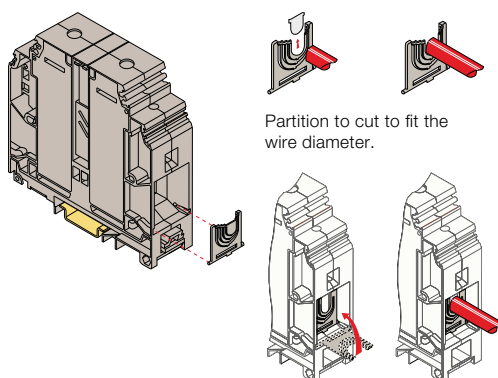

Unlocking

Locking

Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops 12 mm 0.472 in	Grey	BADH	1SNA116900R2700	50	24.00
2 Jumper bars 2 poles 415 A		BJMI36.2	1SNA206126R2500	1	170.00
		BJMI36.3	1SNA206223R0600	1	260.00
3 Protecting covers		CPBP2	1SNA399787R0500	20	1.30
4 Terminal block markers Blank card	White	RC1010	1SNA238000R1600	1	1.30

