


M4/8.SF screw clamp terminal blocks



For 5 x 20 and 5 x 25 fuses - 8 mm 0.315 in spacing



M4/8.SF



8 mm 0.315 in spacing

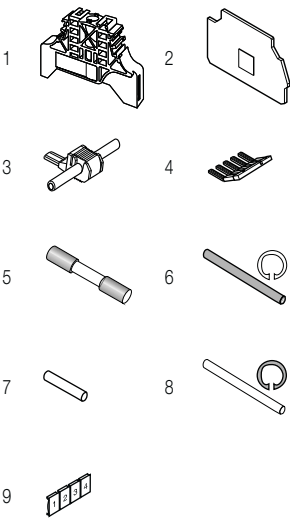

Description

Protect your circuits with 5x20 and 5x25 fuse terminal blocks (fuse not supplied with terminal blocks).

Ordering details

Description	Color	Type	Order code	Pkg	Weight
Fuse	Grey ☐	M4/8.SF	1SNA115657R2500	50	(1 pce) g 14.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-6 mm²	22-12 AWG	24-12 AWG
	Flexible with insulated ferrule	0.5-4 mm²		
	Gauge	A4		
Rated current / Rated cross section		6.3 A / 4 mm²	15 A / 12 AWG	10 A / 12 AWG
Rated short-time withstand current (1s)				
Rated voltage		630 V	600 V	250 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	

Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.5 - 0.8 N.m 4.4 - 7.1 lb.in

CE	RoHS	USR	CSA	Gost R															
----	------	-----	-----	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Accessories

Description	Color	Type	Order code	Pkg	Weight
1 End stops	Grey ☐	BAM2	1SNA206351R1600	50	(1 pce) g 12.00
		BADL	1SNA399903R0200	50	4.70
2 End sections	Grey ☐	FEM8S	1SNA116951R1500	20	2.60
3 Jumper bars	Grey ☐	AD2.5	1SNA114205R2000	50	1.60
4 Lateral jumper bars		PC81-10	1SNA173523R1100	10	5.00
5 Fuses		FU520	1SNA008288R1500	10	
			1SNA008289R1600	10	
			1SNA008290R1300	10	
			1SNA008291R0000	10	
			1SNA008292R0100	10	
6 Assembly rods		TGA8	1SNA168672R1100	10	1.00
			1SNA168673R1200	10	
			1SNA168674R1300	10	
7 Neutral cartridges		CN5	1SNA179371R1600	10	3.90
8 Spring retaining rings		ANT	1SNA168675R1400	10	
9 Terminal block markers	White ☐	RC810	1SNA234000R0200	1	8.20


Feed-through screw clamp terminal blocks

Description	Color	Type	Order code	Pkg	Weight
Feed-through	Grey ☐	M4/8	1SNA115523R0700	50	(1 pce) g 11.00

M4/8.SF screw clamp terminal blocks

For 5x20 and 5x25 fuses - 8 mm 0.315 in spacing

		4 mm² 12 AWG
---	---	--




8 mm 0.315 in spacing

Standard block

Ordering details

Description	Color	Type	Order code	Pkg	Weight
Fuse	Orange 	M4/8.SF2	1SNA105135R1100	50	(1 pce) 9 14.00
Main technical data					
Rated voltage	IEC 630 V	UL 600 V	CSA	Nota	
Impulse withstand voltage	8000 V				
Protection	IP20	NEMA 1			
 CE	 RoHS	 USR	 Gost R		

		4 mm² 12 AWG
---	---	--



8 mm 0.315 in spacing

With 2 test socket DIA 2 mm 0.079 in

Ordering details

Description		Color	Type	Order code	Pkg	Weight
Fuse	With 2 test socket DIA 2 mm 0.079 in	Grey 	M4/8.SFT	1SNA115662R2200	50	(1 pce) 9 14.00
Main technical data		IEC	UL	CSA	Nota	
Rated voltage		400 V	600 V	250 V		
Impulse withstand voltage		4000 V				
Protection		IP20	NEMA 1			
						

Accessories

Description	Color	Type	Order code	Pkg	Weight
1 Test plugs DIA 2 mm 0.079 in	Black 	FC2	1SNA007865R2600	qty 100	(1 pce) g 9




1


M4/8.SF screw clamp terminal blocks

For 5x20 and 5x25 fuses - With blown fuse indicator

8 mm 0.315 in spacing



M4/8.SF



8 mm 0.315 in spacing

Description

- Protect your circuits with 5x20 and 5x25 fuse terminal blocks (fuse not supplied with terminal blocks),
- Quickly identify the defective circuit thanks to the blown fuse indicator.

Ordering details

Description	Color	Type	Order code	Pkg	Weight
Fuse	With blown fuse indicator by LED 24-60 V DC/ 110 V AC	Grey ☐ M4/8.SFD3	1SNA115935R0400	50	14.00

Main technical data

Connecting capacity	IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded Flexible with insulated ferrule Gauge	0.5-6 mm² 0.5-4 mm² A4	
Rated current / Rated cross section	6.3 A / 4 mm²		
Rated short-time withstand current (1s)			
Rated voltage	400 V		
Impulse withstand voltage	4000 V		
Protection	IP20	NEMA 1	

Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.374 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.5 - 0.8 N.m 4.4 - 7.1 lb.in

CE	RoHS	Gost R
----	------	--------

Notes

Blocks with LED indicator are labeled "+" on the outside of the lever. The indicator can be reversed in the field if required.
Leakage current : 24 V : < 0.5 mA / 110 V : < 2.2 mA


Accessories

Description	Color	Type	Order code	Pkg	Weight
1 End stops	Grey ☐	BAM2	1SNA206351R1600	50	12.00
		BADL	1SNA399903R0200	50	4.70
2 End sections	Grey ☐	FEM8S	1SNA116951R1500	20	2.60
3 Jumper bars	Grey ☐	AD2.5	1SNA114205R2000	50	1.60
4 Lateral jumper bars		PC81-10	1SNA173523R1100	10	5.00
5 Fuses		FU520	1SNA008288R1500	10	
			1SNA008289R1600	10	
			1SNA008290R1300	10	
			1SNA008291R0000	10	
			1SNA008292R0100	10	
6 Assembly rods		TGA8	1SNA168672R1100	10	1.00
			1SNA168673R1200	10	
			1SNA168674R1300	10	
7 Spring retaining rings		ANT	1SNA168675R1400	10	
8 Terminal block markers	White ☐	RC810	1SNA234000R0200	1	8.20

M4/8.SF screw clamp terminal blocks

For 5x20 and 5x25 fuses - With blown fuse indicator

8 mm 0.315 in spacing





8 mm 0.315 in spacing

With blown fuse indicator

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With blown fuse indicator by neon 110-230 V AC	Grey	M4/8.SFL	1SNA115661R2100	50	14.00
With blown fuse indicator by LED 24 V AC/DC	Grey	M4/8.SFD	1SNA115663R2300	50	14.00

Main technical data	IEC	UL	CSA	Leakage current :
Rated voltage	400 V	600 V	250 V	24 V : < 4.5 mA
Impulse withstand voltage	4000 V			110 V : < 0.5 mA
Protection	IP20	NEMA 1		230 V : < 0.7 mA
CE	RoHS	UL	CSA	Gost R



8 mm 0.315 in spacing

With blown fuse indicator and 2 test socket DIA 2 mm 0.079 in

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With blown fuse indicator by LED 24 V AC/DC and 2 test socket DIA 2 mm 0.079 in	Grey	M4/8.SFDT	1SNA115665R2500	50	14.00
With blown fuse indicator by neon 110-230 V AC and 2 test socket DIA 2 mm 0.079 in	Grey	M4/8.SFLT	1SNA115667R2700	50	14.00

Main technical data	IEC	UL	CSA	Leakage current :
Rated voltage	400 V	600 V	250 V	24 V : < 4.5 mA
Impulse withstand voltage	4000 V			110 V : < 0.5 mA
Protection	IP20	NEMA 1		230 V : < 0.7 mA
CE	RoHS	UL	CSA	Gost R

Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 Test plugs DIA 2 mm 0.079 in	Black	FC2	1SNA007865R2600	100	




1

M4/8.SN screw clamp terminal blocks

Disconnect with lever - with test socket - 8 mm 0.315 in spacing



M4/8.SN



8 mm 0.315 in spacing

Description

- Simplify the disconnect operations for the disconnect terminal blocks installed next to fuse terminal blocks M4/8.SF...
- With the same profile as M4/8.SF, the M4/8.SN disconnect lever is easily operated by hand and the wiring of the alternated disconnect and fuse circuits is easier,
- Link bar for lever included in terminal.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect	Grey, blue	M4/8.SN	1SNA115659R0700	50	13.00
Disconnect with 2 test socket DIA 2 mm 0.079 in	Grey, blue	M4/8.SNT	1SNA115668R0000	50	13.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-6 mm²	22-12 AWG	24-12 AWG
	Flexible with insulated ferrule	0.5-4 mm²		
	Gauge	A4		
Rated current / Rated cross section		6.3 A / 4 mm²	15 A / 12 AWG	10 A / 12 AWG
Rated short-time withstand current (1s)		90 A		
Rated voltage		630 V	600 V	250 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	

Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.5 - 0.8 N.m 4.4 - 7.1 lb.in


CE	RoHS	USR	CSA	Gost R															
----	------	-----	-----	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BAM2	1SNA206351R1600	50	12.00
		BADL	1SNA399903R0200	50	4.70
2 End sections	Grey	FEM8S	1SNA116951R1500	20	2.60
3 Lateral jumper bars		PC81-10	1SNA173523R1100	10	5.00
4 Assembly rods		TGA8	1SNA168672R1100	10	1.00
			1SNA168673R1200	10	
			1SNA168674R1300	10	
5 Spring retaining rings		ANT	1SNA168675R1400	10	
6 Terminal block markers	White	RC810	1SNA234000R0200	1	8.20

M4/8 screw clamp terminal blocks

Feed-Through - 8 mm 0.315 in spacing



M4/8



8 mm 0.315 in spacing

Description

- Simplify the alternated feed-through and fuse circuits operations,
- With the same profile as M4/8.SF, the wiring of the alternated feed-through and fuse circuits is easier.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Feed-Through	Grey	M4/8	1SNA115523R0700	50	11.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.2-4 mm²		
	Flexible with insulated ferrule	0.22-4 mm²		
	Gauge	A4		
Rated current / Rated cross section		26 A / 4 mm²		
Rated short-time withstand current (1s)		480 A		
Rated voltage		500 V		
Impulse withstand voltage Protection			NEMA	


Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.5 - 0.8 N.m 4.4 - 7.1 lb.in

CE	RoHS	PC	Gost R																
CE	RoHS	PC	Gost R																


Accessories

Description		Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	10 mm 0.394 in	Grey	BAM2	1SNA206351R1600	50	12.00
	9 mm 0.354 in		BADL	1SNA399903R0200	50	4.70
2 End sections	1.5 mm 0.059 in	Grey	FEM8S	1SNA116951R1500	20	2.60
3 Jumper bars	1 poles 24 A	Grey	AD2.5	1SNA114205R2000	50	1.60
4 Lateral jumper bars	10 poles 35 A		PC81-10	1SNA173523R1100	10	5.00
			AL2	1SNA163070R0000	50	
5 Test sockets	DIA 2 mm 0.079 in		AL3	1SNA163261R0000	50	1.20
	DIA 3 mm 0.120 in		FC2	1SNA007865R2600	100	
6 Test plugs	DIA 2 mm 0.079 in	Black				
7 Terminal block markers	Blank card	White	RC810	1SNA234000R0200	1	8.20

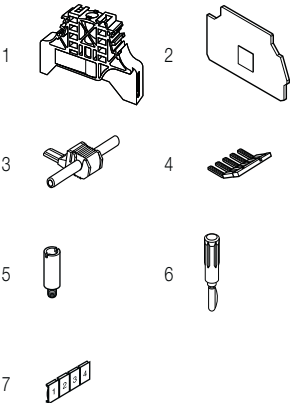


M4/8.D2.SF screw clamp terminal blocks

For 5 x 20 and 5 x 25 fuses - 8 mm 0.315 in spacing



M4/8.D2.SF



8 mm 0.315 in spacing

Description

- Protect your circuits with 5x20 and 5x25 fuse terminal blocks (fuse not supplied with terminal blocks),
- Save space with double deck terminal blocks: 2 independent circuits 1 fuse on upper deck + 1 feed-through.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse	Grey	M4/8.D2.SF	1SNA115604R2100	50	26.00

Main technical data

Connecting capacity		IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded	0.5-6 mm²	24-12 AWG	24-12 AWG
	Flexible with insulated ferrule	0.5-4 mm²		
	Gauge	A4		
Rated current / Rated cross section		6.3 A / 4 mm²	20 A / 12 AWG	10 A / 12 AWG
Rated short-time withstand current (1s)				
Rated voltage		630 V	300 V	250 V
Impulse withstand voltage		8000 V		
Protection		IP20	NEMA 1	

Mounting instructions

Rail		G32, TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.5 - 0.8 N.m 4.4 - 7.1 lb.in

CE	RoHS	UL	CSA	Gost R
CE	RoHS	UL	CSA	Gost R

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BADH	1SNA116900R2700	50	24.00
2 End sections	Grey	FEM8D2S	1SNA116913R0700	20	10.00
3 Jumper bars		BJMI8-2	1SNA176669R1600	10	4.50
		BJMI8-3	1SNA176670R1300	10	6.00
		BJMI8-4	1SNA176671R0000	10	10.00
		BJMI8-10	1SNA176673R0200	10	20.00
4 Lateral jumper bars		PC81-10	1SNA173523R1100	10	5.00
5 Cross spacing jumpers		EL6	1SNA173627R2100	10	0.10
6 Test sockets		AL2	1SNA163043R2100	50	0.90
		AL3	1SNA163261R0000	50	1.20
		AL4-M3	1SNA206721R0100	50	1.10
7 Fuses		FU520	1SNA008288R1500	10	
			1SNA008290R1300	10	
			1SNA008291R0000	10	
8 Assembly rods		TGA8	1SNA168672R1100	10	1.00
			1SNA168673R1200	10	
			1SNA168674R1300	10	
9 Neutral cartridges		CN5	1SNA179371R1600	10	3.90
10 Spring retaining rings		ANT	1SNA168675R1400	10	
11 Terminal block markers	White	RC810	1SNA234000R0200	1	8.20


M4/8.D2.SF screw clamp terminal blocks

For 5 x 20 and 5 x 25 fuses - with blown fuse indicator

8 mm 0.315 in spacing



4 mm²



8 mm 0.315 in spacing

With blown fuse indicator by LED

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With blown fuse indicator by LED 24-60 V DC / 110 V AC	Grey ☐	M4/8.D2.SFD3	1SNA115936R0500	50	30.00

Main technical data	IEC	UL	CSA	Leakage current :
Rated voltage	500 V			24 V : < 0.5 mA
Impulse withstand voltage	6000 V			110 V : < 2.2 mA
Protection	IP20	NEMA 1		
CE	RoHS	PCB	Gost R	



4 mm²

12 AWG



8 mm 0.315 in spacing

With blown fuse indicator by neon

Ordering details


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With blown fuse indicator by neon 110-230 V AC	Grey ☐	M4/8.D2.SFL	1SNA115646R2200	50	30.00

Main technical data	IEC	UL	CSA	Leakage current :
Rated voltage	500 V	300 V	250 V	110 V : < 0.5 mA
Impulse withstand voltage	6000 V			230 V : < 0.7 mA
Protection	IP20	NEMA 1		
CE	RoHS	UL	CSA	PCB
		USR CNR		Gost R



4 mm²

12 AWG



8 mm 0.315 in spacing

With blown fuse indicator


Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With blown fuse indicator by LED 24 V AC/DC	Grey ☐	M4/8.D2.SFD	1SNA115647R2300	50	30.00


Main technical data	IEC	UL	CSA	Leakage current :
Rated voltage	500 V		250 V	24 V : < 4.5 mA
Impulse withstand voltage	6000 V			
Protection	IP20	NEMA 1		
CE	RoHS	CSA	PCB	Gost R

D4/8.D2.P.SF screw clamp terminal blocks

For 5 x 20 and 5 x 25 fuses - 8 mm 0.315 in spacing



D4/8.D2.P.SF



8 mm 0.315 in spacing

Description

- Protect your circuits with 5x20 and 5x25 fuse terminal blocks (fuse not supplied with terminal blocks),
- Save space with double deck terminal blocks: 2 independent circuits 1 fuse on upper deck + 1 feed-through + 1 ground.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse	Grey	D4/8.D2.P.SF	1SNA400270R2000	25	35.00

Main technical data

Connecting capacity	IEC	UL	CSA
1 conductor per clamp			
Rigid - Solid / Stranded	0.5-6 mm²	20-12 AWG	20-12 AWG
Flexible with insulated ferrule	0.5-4 mm²		
Gauge	A4		
Rated current / Rated cross section	6.3 A / 4 mm²	6.3 A / 12 AWG	6.3 A / 12 AWG
Rated short-time withstand current (1s)			
Rated voltage	300 V	300 V	300 V
Impulse withstand voltage	6000 V		
Protection	IP20	NEMA 1	


Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.5 - 0.8 N.m 4.4 - 7.1 lb.in

CE	RoHS	UL	CSA	Gost R															
CE	RoHS	UL	CSA	Gost R															

Accessories


Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BADH	1SNA116900R2700	50	24.00
2 End sections	Grey	FEM8D2S1	1SNA400273R1700	20	4.60
3 Jumper bars		BJM8	1SNA168520R0500	10	5.00
			1SNA168521R2200	10	7.00
			1SNA168522R2300	10	9.50
			1SNA168974R0000	10	23.70
4 Lateral jumper bars		PC81-10	1SNA173523R1100	10	5.00
5 Cross spacing jumpers		EL6	1SNA173627R2100	10	0.10
6 Test sockets		AL2	1SNA163043R2100	50	0.90
		AL4-M3	1SNA206721R0100	50	1.10
7 Fuses		FU520	1SNA008288R1500	10	
			1SNA008290R1300	10	
			1SNA008291R0000	10	
8 Assembly rods		TGA8	1SNA168672R1100	10	1.00
			1SNA168673R1200	10	
			1SNA168674R1300	10	
9 Neutral cartridges		CN5	1SNA179371R1600	10	3.90
10 Spring retaining rings		ANT	1SNA168675R1400	10	
11 Terminal block markers	White	RC810	1SNA234000R0200	1	8.20

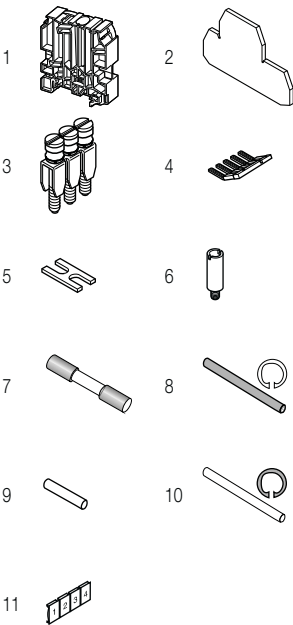


D4/8.D2.P.SF screw clamp terminal blocks

For 5 x 20 and 5 x 25 fuses - with blown fuse indicator

8 mm 0.315 in spacing



D4/8.D2.P.SF



8 mm 0.315 in spacing

Description

- Protect your circuits with 5x20 and 5x25 fuse terminal blocks (fuse not supplied with terminal blocks),
- Save space with double deck terminal blocks: 2 independent circuits 1 fuse on upper deck + 1 feed-through + 1 ground,
- Quickly identify the defective circuit thanks to the blown fuse indicator.

Ordering details

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With blown fuse indicator by neon 110-230 V AC	Grey ☐	D4/8.D2.P.SFL	1SNA400271R1500	25	35.00
With blown fuse indicator by LED 24-60 V DC / 110 V AC	Grey ☐	D4/8.D2.P.SFD	1SNA400272R1600	25	35.00

Main technical data

Connecting capacity	IEC	UL	CSA
1 conductor per clamp	Rigid - Solid / Stranded Flexible with insulated ferrule Gauge	0.5-6 mm² 0.5-4 mm² A4	20-12 AWG 20-12 AWG
Rated current / Rated cross section	6.3 A / 4 mm²	6.3 A / 12 AWG	6.3 A / 12 AWG
Rated short-time withstand current (1s)			
Rated voltage	300 V	300 V	300 V
Impulse withstand voltage Protection	6000 V IP20		

Mounting instructions

Rail		TH 35-7.5, TH 35-15
Wire stripping length		9.5 mm 0.37 in
Tool		Flat screwdriver Ø 4 mm Ø 0.157 in
Torque		0.5 - 0.8 N.m 4.4 - 7.1 lb.in

CE	RoHS	USR	CSA	Gost R															
----	------	-----	-----	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Notes



Blocks with LED indicator are labeled "+" on the outside of the lever. The indicator can be reversed in the field if required.

Leakage current D4/8.D2.P.SFL: 110 V : < 0.5 mA / 230 V : < 0.7 mA

Leakage current D4/8.D2.P.SFD: 24 V : < 0.5 mA / 110 V : < 2.2 mA

Accessories

Description	Color	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey ☐	BADH	1SNA116900R2700	50	24.00
2 End sections	Grey ☐	FEM8D2S1	1SNA400273R1700	20	4.60
3 Jumper bars		BJM8	1SNA168520R0500	10	5.00
			1SNA168521R2200	10	7.00
			1SNA168522R2300	10	9.50
			1SNA168974R0000	10	23.70
4 Lateral jumper bars		PC81-10	1SNA173523R1100	10	5.00
5 Cross spacing jumpers		EL6	1SNA173627R2100	10	0.10
6 Test sockets		AL2	1SNA163043R2100	50	0.90
		AL4-M3	1SNA206721R0100	50	1.10
7 Fuses		FJ520	1SNA008288R1500	10	
			1SNA008290R1300	10	
			1SNA008291R0000	10	
8 Assembly rods		TGA8	1SNA168672R1100	10	1.00
			1SNA168673R1200	10	
			1SNA168674R1300	10	
9 Neutral cartridges		CN5	1SNA179371R1600	10	3.90
10 Spring retaining rings		ANT	1SNA168675R1400	10	
11 Terminal block markers	White ☐	RC810	1SNA234000R0200	1	8.20

