


# ML10/13.SF screw clamp terminal blocks

For 6.3 x 25 and 6.3 x 32 fuses - 13 mm 0.512 in spacing



ML10/13.SF



13 mm 0.512 in spacing

## Description


Protect your circuits with 6.35 x 25.4 mm (1/4 x 1 in) and 6.35 x 32 mm (1/4 x 1 1/4 in) fuse terminal blocks (fuse not supplied with terminal blocks).

## Ordering details


Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse	Black ■	ML10/13.SF	1SNA199095R1300	20	51.00

## Main technical data

Connecting capacity	IEC	UL	CSA	Mounting instructions	
1 conductor per clamp	Rigid - Solid / Stranded Flexible with insulated ferrule Gauge	0.5-16 mm <sup>2</sup> 0.5-10 mm <sup>2</sup> A6	22-10 AWG	22-8 AWG	Rail: G32, TH 35-7.5, TH 35-15 Wire stripping length: 12 mm 0.472 in Tool: Flat screwdriver Torque: Ø 5.5 mm 0.217 in, 1.2 - 1.4 N.m 10.6 - 12.3 lb.in
Rated current / Rated cross section	10 A / 10 mm <sup>2</sup>	25 A / 10 AWG	25 A / 8 AWG		
Rated short-time withstand current (1s)					
Rated voltage	800 V	600 V	600 V		
Impulse withstand voltage	8000 V				
Protection		NEMA			





## Notes

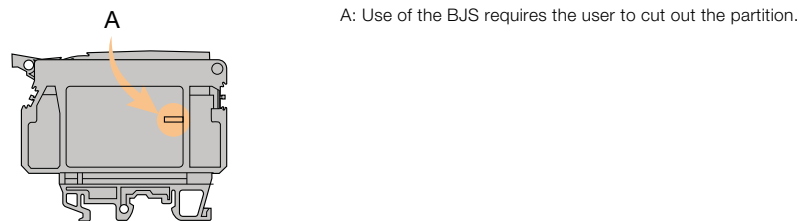

## Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey □	BAM2	1SNA206351R1600	50	12.00
		BADL	1SNA206659R2300	50	4.70
2 End sections	Black ■	FEM13U	1SNA199635R2400	10	5.80
3 Lateral jumper bars		PC13-10	1SNA173510R2000	10	26.00
4 Test sockets		AL2	1SNA163043R2100	50	0.90
		AL3	1SNA163261R0000	50	1.20
		AL4-M3	1SNA206721R0100	50	1.10
5 Test plugs	Black ■	FC2	1SNA007865R2600	100	
	White □	FC4	1SNA167860R0100	10	10.00
6 Fuses		FU633	1SNA168556R0500	10	
			1SNA168558R1700	10	
			1SNA168560R1500	10	
7 Assembly rods		TGA13	1SNA168564R0500	10	
			1SNA168565R0600	10	
			1SNA168566R0700	10	
8 Spring retaining rings		ANT	1SNA168675R1400	10	
9 Terminal block markers	White □	RC1010	1SNA238000R1600	1	1.30

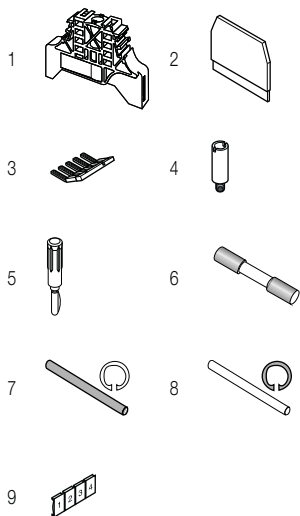


## Disconnect screw clamp terminal blocks

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect	Black, blue ■	ML10/13.SN	1SNA199105R2200	20	59.00

## ML10/13.SF screw clamp terminal blocks

For 6.3 x 25 and 6.3 x 32 fuses - with blown fuse indicator

13 mm 0.512 in spacing



13 mm 0.512 in spacing


With blown fuse indicator by neon

### Ordering details

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With blown fuse indicator by neon 110-230 V AC	Black ■	ML10/13.SFL	1SNA199168R0000	20	54.00

Main technical data	IEC	UL	CSA	Leakage current :
Rated voltage	800 V	600 V	600 V	110 V : < 0.5 mA 230 V : < 0.7 mA
Impulse withstand voltage	8000 V			
Protection		NEMA		

CE	RoHS	UR	CSA	Gost R															
----	------	----	-----	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--



13 mm 0.512 in spacing

With blown fuse indicator by LED

### Ordering details


Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Fuse With blown fuse indicator by LED 24 V AC/DC	Black ■	ML10/13.SFD	1SNA199166R2600	20	54.00

Main technical data	IEC	UL	CSA	Leakage current :
Rated voltage	800 V	600 V	600 V	24 V : < 4.5 mA
Impulse withstand voltage	8000 V			
Protection		NEMA		


CE	RoHS	UR	CSA	Gost R															
----	------	----	-----	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

# ML10/13.SN screw clamp terminal blocks

## Disconnect with lever - 13 mm 0.512 in spacing



ML10/13.SN



13 mm 0.512 in spacing

### Description


- Simplify the disconnect operations for the disconnect terminal blocks installed next to fuse terminal blocks ML10/13.SF...
- With the same profile as ML10/13.SF, the ML10/13.SN disconnect lever is easily operated by hand and the wiring of the alternated disconnect and fuse circuits is easier,
- Link bar for lever included in terminal block.

### Ordering details


Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
Disconnect With test sockets DIA 2 mm 0.079 in	Black, blue	ML10/13.SN	1SNA199105R2200	20	59.00

### Main technical data

Connecting capacity	IEC	UL	CSA	Mounting instructions	
1 conductor per clamp Rigid - Solid / Stranded Flexible with insulated ferrule Gauge	0.5-16 mm <sup>2</sup>	22-10 AWG	22-8 AWG	Rail	G32, TH 35-7.5, TH 35-15
	0.5-10 mm <sup>2</sup>			Wire stripping length	12 mm 0.472 in
	A6			Tool	Flat screwdriver Ø 5.5 mm Ø 0.217 in
Rated current / Rated cross section	16 A / 10 mm <sup>2</sup>	25 A / 10 AWG	25 A / 8 AWG	Torque	1.2 - 1.4 N.m 10.6 - 12.3 lb.in
Rated short-time withstand current (1s)	180 A				
Rated voltage	800 V	600 V	600 V		
Impulse withstand voltage	8000 V				
Protection		NEMA			



### Notes



A: Use of the BJS requires the user to cut out the partition.

### Accessories

Description	Colour	Type	Order code	Pkg qty	Weight (1 pce) g
1 End stops	Grey	BAM2	1SNA206351R1600	50	12.00
		BADL	1SNA399903R0200	50	4.70
2 End sections	Black	FEM13U	1SNA199635R2400	10	5.80
3 Lateral jumper bars		PC13-10	1SNA173510R2000	10	26.00
4 Test sockets		AL2	1SNA163043R2100	50	0.90
		AL3	1SNA163261R0000	50	1.20
		AL4-M3	1SNA206721R0100	50	1.10
5 Test plugs	Black	FC2	1SNA007865R2600	100	
	White	FC4	1SNA167860R0100	10	
6 Assembly rods		2 poles	1SNA168564R0500	10	
		3 poles	1SNA168565R0600	10	
		4 poles	1SNA168566R0700	10	
7 Spring retaining rings		ANT	1SNA168675R1400	10	
8 Terminal block markers	White	RC1010	1SNA238000R1600	1	1.30