


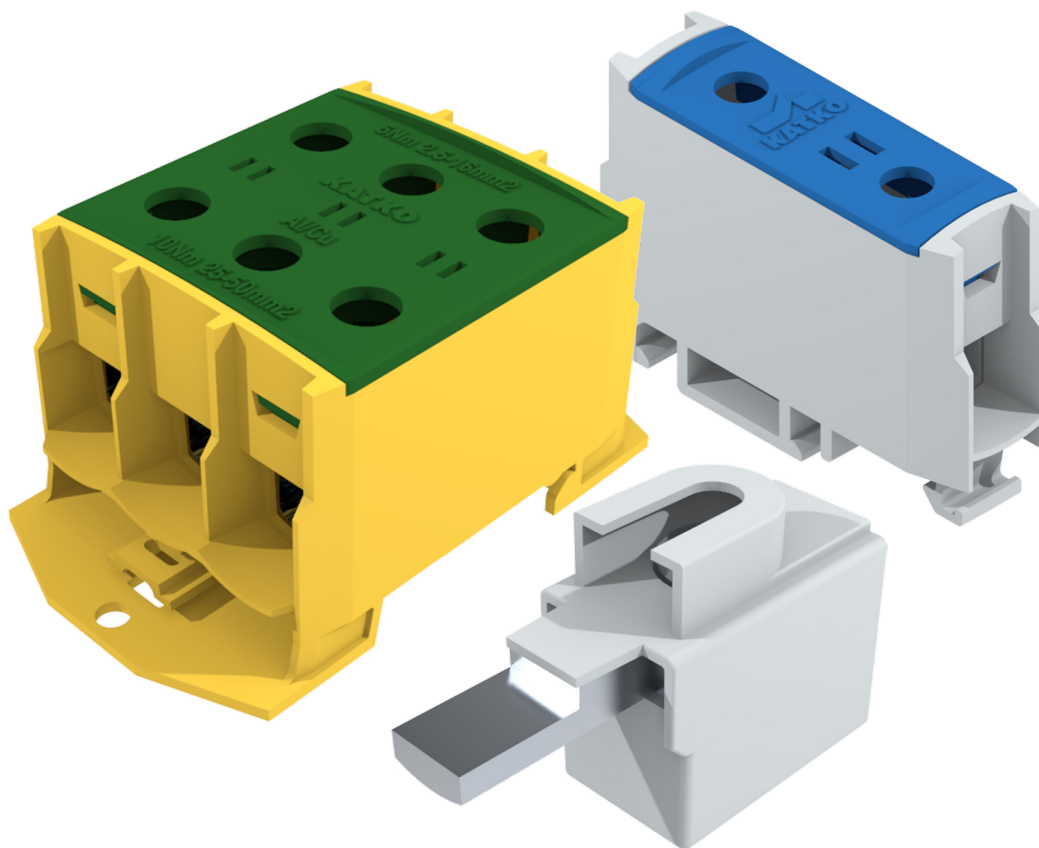


TERMINAL BLOCKS & CONNECTORS

CONTENTS

KL TERMINAL BLOCKS	4
POLYCARBONATE AND STAINLESS STEEL ENCLOSED TERMINAL BLOCKS	5
FIXING ACCESSORIES	5
KKL CABLE CONNECTORS	6
KKL VERTICAL CABLE CONNECTORS	7
KLH CABLE CONNECTORS	7
SPREADERS	7
 KL TERMINAL BLOCKS - UL 1059	 8
KLH CABLE CONNECTORS UL 486A-486B	9
 DIMENSIONAL DRAWINGS	 10
 KC & KL TERMINAL BLOCKS	 10
ENCLOSED TERMINAL BLOCKS	13
KKL CABLE CONNECTORS	15
CABLE CONNECTORS &	20
KKL VERTICAL CABLE CONNECTORS	20
KKL VERTICAL CABLE CONNECTORS &	21
KLH CABLE CONNECTORS	21
 NUMBER OF CONDUCTORS SIMULTANEOUSLY CONNECTABLE TO THE TERMINAL	 22
COMPATIBILITY TABLE - KATKO SWITCHES AND CABLE CONNECTORS	24
COMPATIBILITY TABLE & DIMENSIONAL DRAWINGS OF SPREADERS	25

 **KATKO** **ConnectSafe**

Extensive selection of KATKO terminal blocks and connectors
suitable for both aluminium and copper cables.
Easy to install directly onto a DIN rail or with screws.

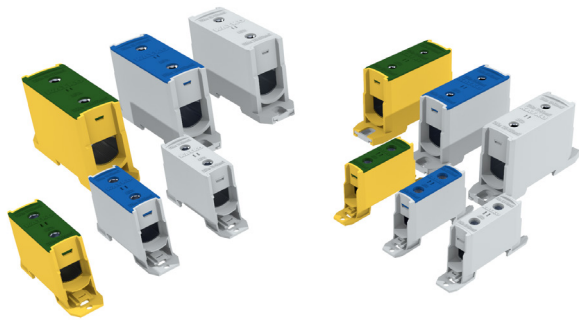

KC & KL TERMINAL BLOCKS

- KL range: Certified according to IEC 61238-1 Class A
- Sale unit = 1 pc
- KL terminal blocks compatible with markers, see page 8 for example
- For Al/Cu cables: 1.5 - 300 mm²
- Available in grey, blue (N) and yellow/green (PE)
- Available as 1-pole connector (1X) and 1-pole branching connector (2X)
- 50 and 95 mm² connectors also available as 1-pole branching connector (3X) and 3-pole connector (3X1X)
- Touchproof, IP20
- Terminal material tin-coated, greased aluminium
- KL1X16 & KC-terminals 16 - 35 mm² for DIN-rail mounting
- KL-terminals 50 - 300 mm² for DIN-rail or base mounting
- Environmentally friendly materials
- Durable laser markings
- **UL certified terminal blocks available, see UL section of this catalogue**

Type	Un (V)	In (Al) (A)	In (Cu) (A)	Al/Cu mm ²	Torque Al/Cu (Nm)	No of conductors	Key size	Mounting	EAN code	Weight kg	Package size PCS
KC1X16	800	-	63	1.5-16*	1.8	2	PZ2	DIN	6419410357200	0,021	100
KC1X16N									6419410357217		
KC1X16PE									6419410357224		
KC2X16	800	-	125	1.5-16*	1.8	4	PZ2	DIN	6419410357507	0,047	50
KC2X16N									6419410357514		
KC2X16PE									6419410357521		
KC1X35	800	-	135	2.5-35*	2.5	2	PZ2	DIN	6419410357231	0,03	84
KC1X35N									6419410357248		
KC1X35PE									6419410357255		
KC2X35	800	-	270	2.5-35*	2.5	4	PZ2	DIN	6419410357538	0,069	42
KC2X35N									6419410357545		
KC2X35PE									6419410357552		
KL1X16	1000	75	76	1.5 - 16	5	2	Hex 4	DIN	6419410484364	0,022	60
KL1X16N									6419410484371		
KL1X16PE									6419410484562		
KL1X50	1000	160	160	2.5 - 50	5 (2.5 - 16 mm ²)	2	Hex 5	Screw / DIN	6419410378250	0,060	32
KL1X50N					10 (25 - 50 mm ²)				6419410378267		
KL1X50PE					5 (2.5 - 16 mm ²)				6419410378274		
KL2X50	1000	200	320	2.5 - 50	5 (2.5 - 16 mm ²)	4	Hex 5	Screw / DIN	6419410378281	0,104	18
KL2X50N					10 (25 - 50 mm ²)				6419410378298		
KL2X50PE					5 (2.5 - 16 mm ²)				6419410378304		
KL3X50	1000	160	160	2.5 - 50	5 (2.5 - 16 mm ²)	6	Hex 5	Screw / DIN	6419410205587	0,098	10
KL3X50N					10 (25 - 50 mm ²)				6419410205594		
KL3X50PE					5 (2.5 - 16 mm ²)				6419410205600		
KL3X1X50	1000	160	160	2.5 - 50	10 (25 - 50 mm ²)	6	Hex 5	Screw / DIN	6419410205617	0,098	10
KL3X1X50N					12 (16 - 50 mm ²)				6419410205624		
KL3X1X50PE					22 (70 - 95 mm ²)				6419410205631		
KL1X95	1000	200	245	16 - 95	12 (16 - 50 mm ²)	2	Hex 6	Screw / DIN	6419410378311	0,096	22
KL1X95N					22 (70 - 95 mm ²)				6419410378328		
KL1X95PE					12 (16 - 50 mm ²)				6419410378335		
KL2X95	1000	400	490	16 - 95	22 (70 - 95 mm ²)	4	Hex 6	Screw / DIN	6419410378342	0,169	12
KL2X95N					12 (16 - 50 mm ²)				6419410378359		
KL2X95PE					22 (70 - 95 mm ²)				6419410378366		
KL3X95	1000	200	245	16 - 95	12 (16 - 50 mm ²)	6	Hex 6	Screw / DIN	6419410205648	0,202	6
KL3X95N					22 (70 - 95 mm ²)				6419410205655		
KL3X95PE					12 (16 - 50 mm ²)				6419410205662		
KL3X1X95	1000	200	245	16 - 95	22 (70 - 95 mm ²)	6	Hex 6	Screw / DIN	6419410205679	0,202	6
KL3X1X95N					12 (25 - 50 mm ²)				6419410205686		
KL3X1X95PE					22 (70 - 95 mm ²)				6419410205693		
KL1X150	1000	250	320	25 - 150	12 (25 - 50 mm ²)	2	Hex 6	Screw / DIN	6419410378373	0,181	18
KL1X150N					22 (70 - 95 mm ²)				6419410378380		
KL1X150PE					38 (120 - 150 mm ²)				6419410378397		
KL2X150	1000	500	640	25 - 150	12 (25 - 50 mm ²)	4	Hex 6	Screw / DIN	6419410378403	0,317	10
KL2X150N					22 (70 - 95 mm ²)				6419410378410		
KL2X150PE					38 (120 - 150 mm ²)				6419410378427		
KL1X240	1000	315	425	35 - 240	25 (35 - 120 mm ²)	2	Hex 8	Screw / DIN	6419410378434	0,293	14
KL1X240N					55 (150 - 240 mm ²)				6419410378441		
KL1X240PE					25 (35 - 120 mm ²)				6419410378458		
KL2X240	1000	630	850	35 - 240	25 (35 - 120 mm ²)	4	Hex 8	Screw / DIN	6419410378465	0,522	8
KL2X240N					55 (150 - 240 mm ²)				6419410378472		
KL2X240PE					45 (95-120 mm ²)				6419410378489		
KL1X300	1000	400	520	95 - 300	75 (150-300 mm ²)	2	Hex 12	Screw / DIN	6419410484388	0,491	12
KL1X300N					45 (95-120 mm ²)				6419410484395		
KL1X300PE					75 (150-300 mm ²)				6419410378816		
KL2X300	1000	800	1040	95 - 300	75 (150-300 mm ²)	4	Hex 12	Screw / DIN	6419410484401	0,901	6
KL2X300N					75 (150-300 mm ²)				6419410484418		
KL2X300PE					75 (150-300 mm ²)				6419410378823		

* Cu only

POLYCARBONATE AND STAINLESS STEEL ENCLOSED TERMINAL BLOCKS



- For:
 - Cu cables 1.5 - 240 mm²
 - Al cables 2.5 - 240 mm²
- Terminal material: tin-coated aluminium
- IP66: U3, U4, H32, H02; IP 65: MF01, MF03, H03
- All models include:
 - L1, L2 ja L3 terminal blocks, grey (single or double)
 - N- terminal block (single or double)
 - PE -terminal block (single or double)
- Environmentally friendly materials
- Cable glands included
- Certified according to IEC 61238-1 Class A

Polycarbonate enclosures

Type	Un (V)	In (Al) (A)	In (Cu) (A)	Al/Cu mm ²	Torque Al/Cu (Nm)	No of cables	Key size	Enclosure	Cable glands	EAN code	Weight kg
KLM2X16 M3 4XM32P	800	-	125	1.5-16 (Cu)	1.8	4	PZ2	M3	M32 X4	6419410391815	0.8
KLM1X50 M4 2XM40P	1000	160	160	2.5 - 50	5 (2.5 - 16 mm ²) / 10 (25 - 50 mm ²)	2	Hex 5	M4	M40 X2	6419410391846	1,1
KLM2X50 M4 4XM40P	1000	200	320	2.5 - 50	5 (2.5 - 16 mm ²) / 10 (25 - 50 mm ²)	4	Hex 5	M4	M40 X4	6419410391853	1,3
KLM1X95 MF01 2XM63P	1000	200	245	16 - 95	12 (16 - 50 mm ²) / 22 (70 - 95 mm ²)	2	Hex 6	MF01	M63 X2	6419410391860	2,3
KLM2X95 MF01 4XM63P	1000	400	490	16 - 95	12 (16 - 50 mm ²) / 22 (70 - 95 mm ²)	4	Hex 6	MF01	M63 X4	6419410391877	3,0
KLM2X150 MF03 2XEPA2260	1000	500	640	25 - 150	12 (25 - 50 mm ²) / 22 (70 - 95 mm ²) / 38 (120 - 150 mm ²)	4	Hex 6	MF03	EPA 2260 X2	6419410391891	5,0

Stainless steel enclosures


Type	Un (V)	In (Al) (A)	In (Cu) (A)	Al/Cu mm ²	Torque Al/Cu (Nm)	No of cables	Key size	Enclosure	Cable glands	EAN code	Weight kg
KLR2X16 RA4 4XM32M KST16M	800	-	125	1.5-16 (Cu)	1.8	4	PZ2	RA4	M32 X4	6419410391938	2.4
KLR1X50 RA4 2XM40M KST16M	1000	160	160	2.5 - 50	5 (2.5 - 16 mm ²) / 10 (25 - 50 mm ²)	2	Hex 5	RA4	M40 X2	6419410391969	2,6
KLR2X50 RA4 4XM40M KST16M	1000	200	320	2.5 - 50	5 (2.5 - 16 mm ²) / 10 (25 - 50 mm ²)	4	Hex 5	RA4	M40 X4	6419410391976	2,6
KLR1X95 RA5 2XM63M	1000	200	245	16 - 95	12 (16 - 50 mm ²) / 22 (70 - 95 mm ²)	2	Hex 6	RA5	M63 X2	6419410391983	6,0
KLR2X95 RA5 4XM63M	1000	400	490	16 - 95	12 (16 - 50 mm ²) / 22 (70 - 95 mm ²)	4	Hex 6	RA5	M63 X4	6419410391990	6,8
KLR2X150 R6 2XEPA2260	1000	500	640	25 - 150	12 (25 - 50 mm ²) / 22 (70 - 95 mm ²) / 38 (120 - 150 mm ²)	4	Hex 6	R6	EPA 2260 X2	6419410392010	15,5

FIXING ACCESSORIES

- For bolt mountable KKL connectors
- One package for 3- or 4-pole switches contains all necessary bolts, nuts and washers

Type	Description	For	EAN code
M12PP3P	Fixing bolts for connectors	3P	6419410288368
M10PP3P	Fixing bolts for connectors	3P	6419410288351
M8PP3P	Fixing bolts for connectors	3P	6419410288344
M8PP4P	Fixing bolts for connectors	4P	6419410287804
M10PP4P	Fixing bolts for connectors	4P	6419410287811
M12PP4P	Fixing bolts for connectors	4P	6419410287828


KKL CABLE CONNECTORS

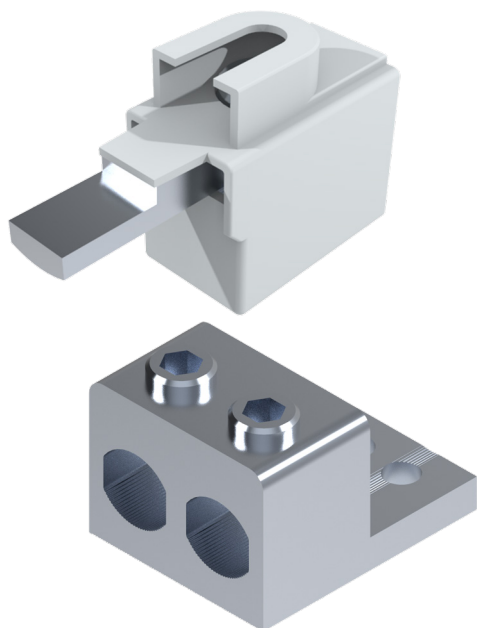

- For 1.5-300 mm² Al/Cu cables
- Material: tin-coated aluminium
- Certified according to IEC 61238-1 Class A
- Environmentally friendly materials
- Sale unit = 1 pc

Type	Un (V)	In (Al) (A)	In (Cu) (A)	Al mm ²	Cu mm ²	Torque Al/Cu (Nm)	Number of conductors	Allen key size	Mounting	EAN code	Weight kg	Package size PCS
KKL1X16	690	63	63	1,5-16	1,5-16	2,2 (1,5-16mm ²)	1	Hex 3	Direct	6419410378496	0,01	30
KKL1X50T1	690	125	125	16-50	2,5-50	5 (2,5-16mm ²) / 10 (25-50mm ²)	1	Hex 5	Direct	6419410378717	0,019	12
KKL1X50T2	690	125	125	16-50	2,5-50	5 (2,5-16mm ²) / 10 (25-50mm ²)	1	Hex 5	Direct	6419410378502	0,019	12
KKL1X50T3	690	125	125	16-50	2,5-50	5 (2,5-16mm ²) / 10 (25-50mm ²)	1	Hex 5	Direct	6419410378724	0,019	12
KKL1X50M	690	125	125	16-50	2,5-50	5 (2,5-16mm ²) / 10 (25-50mm ²)	1	Hex 5	Direct	6419410378519	0,017	12
KKL1X50N	690	125	125	16-50	2,5-50	5 (2,5-16mm ²) / 10 (25-50mm ²)	1	Hex 5	Direct	6419410378670	0,014	25
KKL1X50	690	160	160	16-50	2,5-50	5 (2,5-16mm ²) / 10 (25-50mm ²)	1	Hex 5	Bolt	6419410378571	0,011	25
KKL2X50	690	200	320	16-50	16-50	5 (2,5-16mm ²) / 10 (25-50mm ²)	2	Hex 5	Bolt M8	6419410378588	0,023	12
KKL2X50M	690	200	320	16-50	16-50	5 (2,5-16mm ²) / 10 (25-50mm ²)	2	Hex 5	Bolt M8	6419410378663	0,023	12
KKL1X95	690	200	245	25-95	25-95	12 (16-50 mm ²) / 22 (70-95 mm ²)	1	Hex 6	Bolt M10	6419410200230	0,03	48
KKL1X95M	690	200	245	25-95	25-95	12 (16-50 mm ²) / 22 (70-95 mm ²)	1	Hex 6	Bolt M8	6419410378953	0,03	48
KKL2X95	690	400	490	25-95	25-95	12 (16-50 mm ²) / 22 (70-95 mm ²)	2	Hex 6	Bolt M10	6419410378601	0,061	48
KKL2X95LR	690	400	490	25-95	25-95	12 (16-50 mm ²) / 22 (70-95 mm ²)	2	Hex 6	Bolt M10	6419410205853	0,061	48
KKL1X120T1	690	200	245	16-120	16-120	12 (16-50 mm ²) / 22 (70-120 mm ²)	1	Hex 6	Direct	6419410378526	0,037	20
KKL1X120T2	690	200	245	16-120	16-120	12 (16-50 mm ²) / 22 (70-120 mm ²)	1	Hex 6	Direct	6419410378533	0,037	20
KKL1X120T3	690	200	245	16-120	16-120	12 (16-50 mm ²) / 22 (70-120 mm ²)	1	Hex 6	Direct	6419410378540	0,037	20
KKL1X120T	690	200	245	16-120	16-120	12 (16-50 mm ²) / 22 (70-120 mm ²)	1	Hex 6	Direct	6419410378700	0,037	20
KKL1X120TM	690	200	245	16-120	16-120	12 (16-50 mm ²) / 22 (70-120 mm ²)	1	Hex 6	Direct	6419410378557	0,037	20
KKL1X120RS	690	200	245	16-120	16-120	12 (16-50 mm ²) / 22 (70-120 mm ²)	1	Hex 6	Bolt M8	6419410378687	0,044	20
KKL1X120RSY	690	200	245	16-120	16-120	12 (16-50 mm ²) / 22 (70-120 mm ²)	1	Hex 6	Bolt M8	6419410378694	0,044	20
KKL1X150	690	250	320	25-150	25-150	12 (25-50 mm ²) / 22 (70-95 mm ²) / 38 (120-150 mm ²)	1	Hex 6	Bolt M10	6419410378618	0,073	20
KKL1X150T2	690	250	320	25-150	25-150	12 (25-50 mm ²) / 22 (70-95 mm ²) / 38 (120-150 mm ²)	1	Hex 6	Direct	6419410378748	0,073	20
KKL2X150	690	500	640	25-150	25-150	12 (25-50 mm ²) / 22 (70-95 mm ²) / 38 (120-150 mm ²)	2	Hex 6	Bolt M12	6419410378625	0,15	20
KKL2X150LR	690	500	640	25-150	25-150	12 (25-50 mm ²) / 22 (70-95 mm ²) / 38 (120-150 mm ²)	2	Hex 6	Bolt M12	6419410300459	0,15	20
KKL1X240	690	315	425	35-240	35-240	25 (35-120 mm ²) / 55 (150-240 mm ²)	1	Hex 8	Bolt M12	6419410378632	0,113	16
KKL2X240	690	630	850	35-240	35-240	25 (35-120 mm ²) / 55 (150-240 mm ²)	2	Hex 8	Bolt M12	6419410378649	0,245	16
KKL1X240TM	690	400	425	35-240	35-240	25 (35-120 mm ²) / 40 (150-240 mm ²)	1	Hex 8	Bolt M8	6419410378656	0,113	20
KKL1X240TE	690	400	400	35-240	35-240	25 (35-120 mm ²) / 40 (150-240 mm ²)	1	Hex 8	Bolt M8	6419410378731	0,113	20
KKL2X240LR	690	630	850	35-240	35-240	25 (35-120 mm ²) / 55 (150-240 mm ²)	2	Hex 8	Bolt M12	6419410378755	0,245	16
KKL1X300	690	400	520	95-300	95-300	45 (95-120 mm ²) / 75 (150-300 mm ²)	1	Hex 12	Bolt M12	6419410484289	0,262	10
KKL2X300	690	800	1040	95-300	95-300	45 (95-120 mm ²) / 75 (150-300 mm ²)	2	Hex 12	Bolt M12	6419410484296	0,501	3


KKL VERTICAL CABLE CONNECTORS

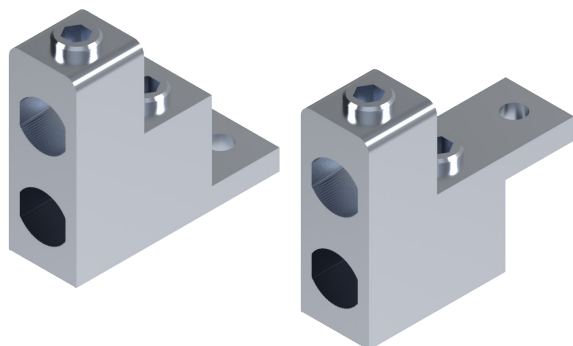

- For 25-300 mm² Al/Cu cables
- Blade middle (VM) and blade bottom (VB) models
- Material: tin-coated aluminium
- Environmentally friendly materials
- Certified according to IEC 61238-1 Class A
- Sale unit = 1 pc

Type	Un (V)	In (Al) (A)	In (Cu) (A)	Al mm ²	Cu mm ²	Torque Al/Cu (Nm)	Number of conductors	Allen key size	Mounting	EAN code	Weight kg	Package size PCS
KKL2X150VB	690	500	640	25-150	25-150	12 (25-50 mm ²) / 22 (70-95 mm ²) / 38 (120-150 mm ²)	2	Hex 6	Bolt M12	6419410484319	0,18	3
KKL2X150VM	690	500	640	25-150	25-150	12 (25-50 mm ²) / 22 (70-95 mm ²) / 38 (120-150 mm ²)	2	Hex 6	Bolt M12	6419410484302	0,18	3
KKL2X240VB	690	630	850	35-240	35-240	25 (35-120 mm ²) / 40 (150-240 mm ²)	2	Hex 8	Bolt M12	6419410484333	0,339	3
KKL2X240VM	690	630	850	35-240	35-240	25 (35-120 mm ²) / 40 (150-240 mm ²)	2	Hex 8	Bolt M12	6419410484326	0,339	3
KKL2X300VB	690	800	1040	95-300	95-300	45 (95-120 mm ²) / 75 (150-300 mm ²)	2	Hex 12	Bolt M12	6419410484357	0,572	3
KKL2X300VM	690	800	1040	95-300	95-300	45 (95-120 mm ²) / 75 (150-300 mm ²)	2	Hex 12	Bolt M12	6419410484340	0,572	3

KLH CABLE CONNECTORS

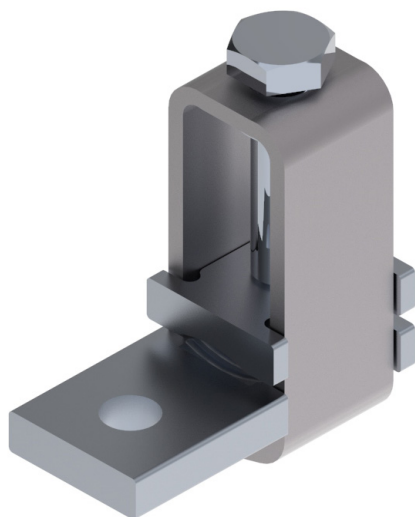

- Connector with an intermediate part for applying pressure to the conductor
- Suitable for 2 X 50-300 mm² Al/Cu cables
- Narrow profile when installed vertically
- Suitable for various cable types (for example fine stranded and solid)
- Material:
 - Frame: stainless steel
 - Connection bar: tin-plated copper
- Sale unit = 1 pc
- **UL certified cable connectors available, see UL section of this catalogue**

Type	Al/Cu mm ²	Torque Al/Cu (Nm)	No of conductors	Key size	EAN code	Weight kg	Package size PCS
KLH2X150	2 X 50 - 150	44	4	Hex 17	6419410358580	0.26	3
KLH2X240	2 X 95 - 240	75	4	Hex 19	6419410358597	0.37	3
KLH2X300	2 X 185 - 300	75	4	Hex 19	6419410358603	0.49	3

SPREADERS

- For fitting cable connectors to switches

Type	Description	For	EAN code	Package size PCS
ALK3160	8 mm bolt, 1 package contains spreaders for all terminals of switch	EVA & VKA 125-160A 3-pole	6419410225301	1
ALK4160	8 mm bolt, 1 package contains spreaders for all terminals of switch	EVA & VKA 125-160A 4-pole	6419410225400	1
ALK800	13 mm bolt, 1 package contains 1 spreader	KU 800A, 3 & 4-pole	6419410205884	1
ALK800C	13 mm bolt, 1 package contains 1 spreader	KU 800A, 3-pole	6419410205877	1

KL TERMINAL BLOCKS - UL 1059




- UL cables: 500 kcmil - 6 AWG
- IEC cables: 2.5 - 240 mm²
- Available in grey, blue (N) and yellow/green (PE)
- Housing and cover in polyamide
- Terminal material tin-coated, greased aluminium
- For DIN-rail or base mounting
- Environmentally friendly materials
- UL 1059, CAN/CSA C22.2 No. 158-10
- Sale unit = 1 pc


Type	EAN code	Voltage (V)	Ampere Al (A)	Ampere Cu (A)	Line/Load Wire Size-Str Cu/Al (kcmil/AWG)	Torque Al/Cu lb-in	Key size	Mounting	Weight kg	Package size PCS
KL1X50	6419410378250	1000V	120A	150A	1/0 - 6	90 lb in	Hex 5	Screw / DIN	0.060	32
KL1X50N	6419410378267									
KL1X50PE	6419410378274									
KL2X50	6419410378281	1000V	240A	300A	1/0 - 6	90 lb in	Hex 5	Screw / DIN	0.104	18
KL2X50N	6419410378298									
KL1X95	6419410378311	1000V	155A	200A	3/0 - 4	110 lb in	Hex 6	Screw / DIN	0.096	22
KL1X95N	6419410378328					(1/0 - 4 AWG) / 200 lb in				
KL1X95PE	6419410378335					(3/0 - 2/0 AWG)				
KL2X95	6419410378342	1000V	360A	460A	4/0 - 4	110 lb in	Hex 6	Screw / DIN	0.169	12
KL2X95N	6419410378359					(1/0 - 4 AWG) / 200 lb in (4/0 - 2/0 AWG)				
KL1X150	6419410378373	1000V	230A	285A	300 - 2	110 lb in (1/0 - 2 AWG) /	Hex 6	Screw / DIN	0.181	18
KL1X150N	6419410378380					200 lb in (4/0 - 2/0 AWG) / 340 lb in (300 - 250 kcmil)				
KL2X150	6419410378403	1000V	460A	570A	300 - 2	110 lb in (1/0 - 2 AWG) /	Hex 6	Screw / DIN	0.317	10
KL2X150N	6419410378410					200 lb in (4/0 - 2/0 AWG) / 340 lb in (300 - 250 kcmil)				
KL1X240	6419410378434	1000V	310A	380A	500 - 3/0	220 lb in (250 kcmil - 3/0 AWG) /	Hex 8	Screw / DIN	0.293	14
KL1X240N	6419410378441					490 lb in (500 - 300 kcmil)				
KL2X240	6419410378465					220 lb in (250 kcmil - 3/0 AWG) /				
KL2X240N	6419410378472	1000V	620A	760A	500 - 3/0	490 lb in (500 - 300 kcmil)	Hex 8	Screw / DIN	0.522	8

-- Grey, N = Blue, PE = Yellow/Green

Attaching marker for KL terminal block

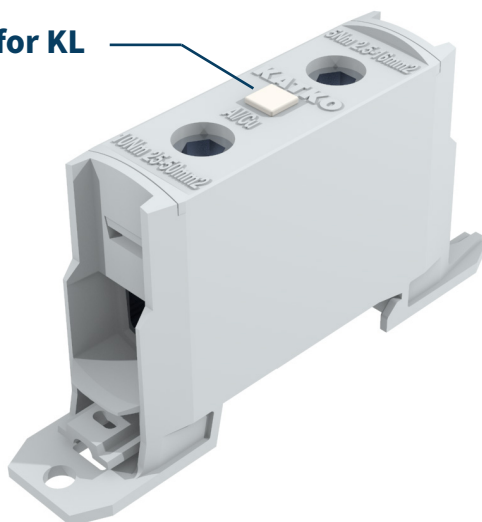



KLH CABLE CONNECTORS UL 486A-486B

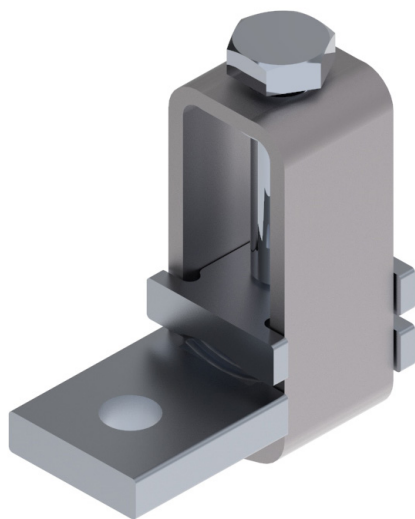



- UL 486A-486B
- CSA C22.2 No.65.
- Connector with an intermediate part for applying pressure to the conductor
- Suitable for various wire types (for example fine stranded and solid)
- Narrow profile when installed vertically
- Suitable for 2 X 1/0 AWG - 600 kcmil wires
- Sale unit = 1 pc
- Material:
 - Frame: stainless steel
 - Connection bar: tin-plated copper

Type	EAN code	Line/Load Wire Size-Str (kcmil/AWG)	Torque Cu lb-in	Key size	Weight kg	Package size PCS
KLH2X150	6419410358580	2 X 300 - 1/0	390	Hex 17	0.26	3
KLH2X240	6419410358597	2 X 500 - 3/0	660	Hex 19	0.37	3
KLH2X300	6419410358603	2 X 600 - 300	660	Hex 19	0.49	3



DIMENSIONAL DRAWINGS KC & KL TERMINAL BLOCKS

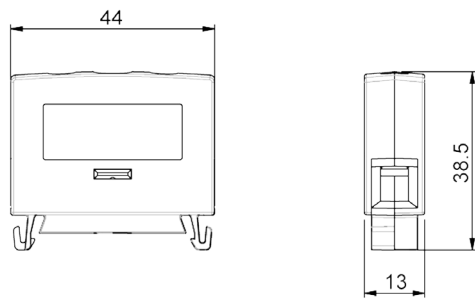



KC1X16

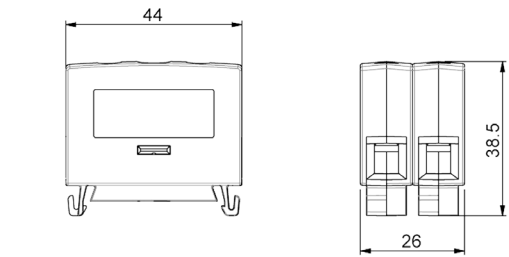



KC2X16

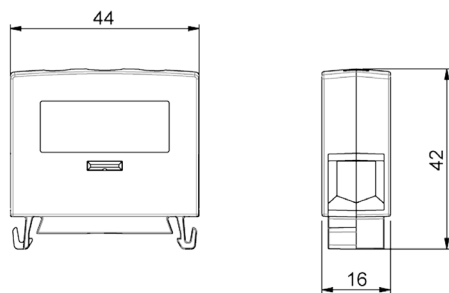


KC1X35

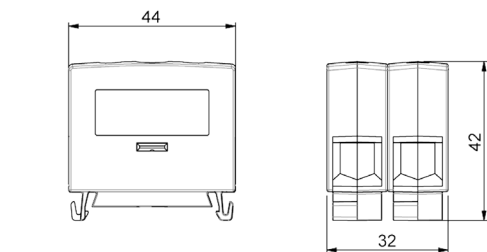


KC2X35

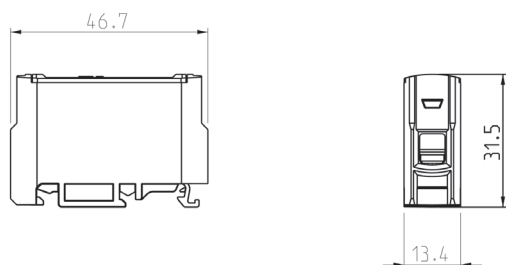


KL1X16

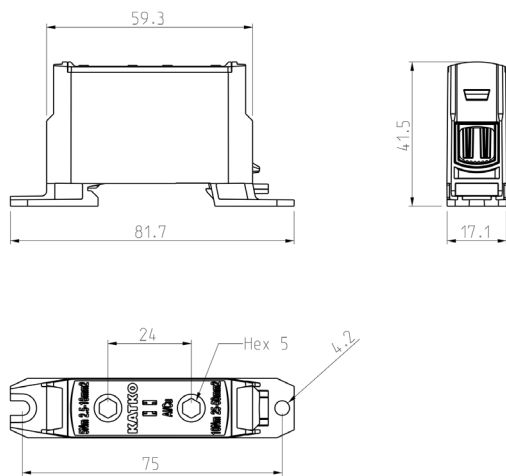


KL1X50

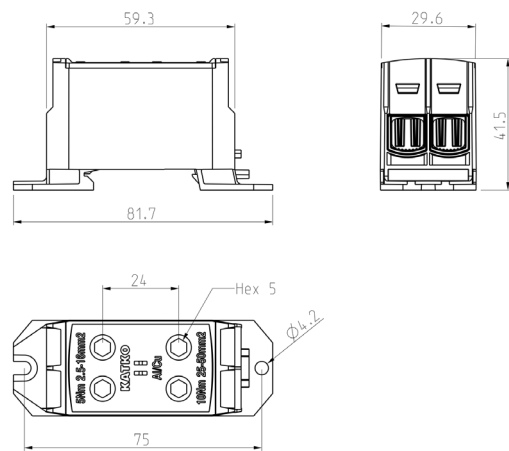


KL2X50

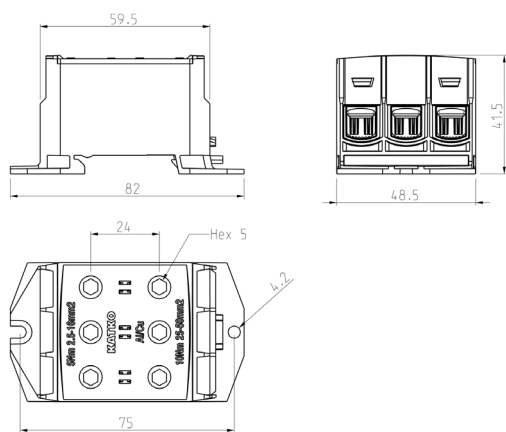


KL3X50 / 3X1X50

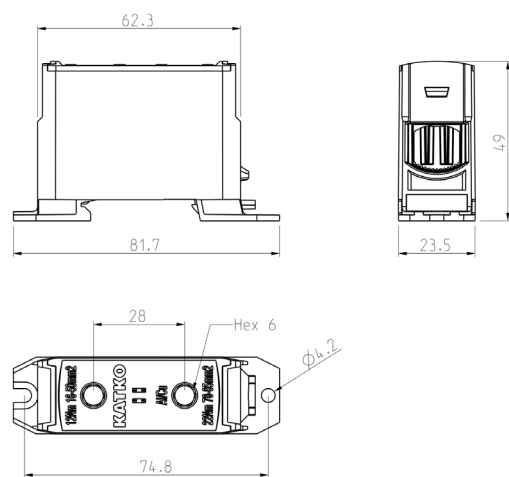


KL1X95

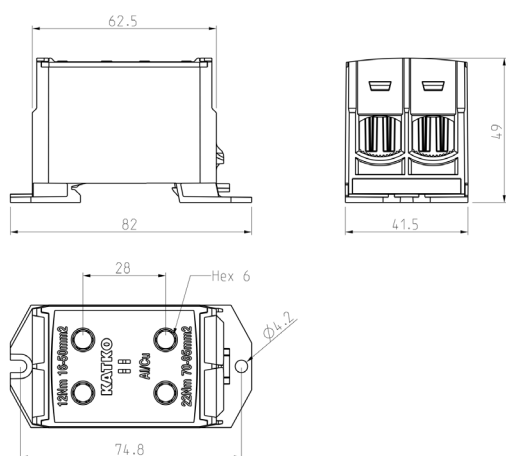


KL2X95

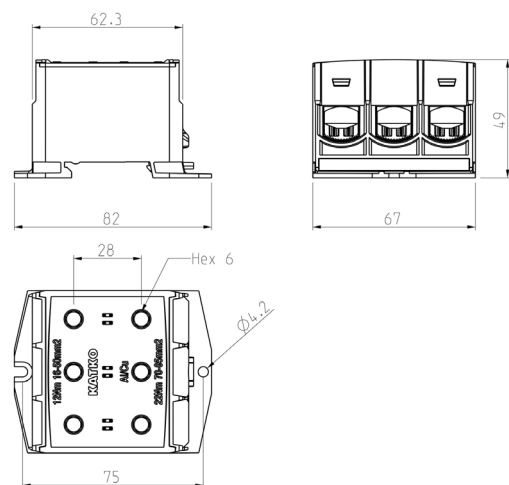


KL3X95 / 3X1X95

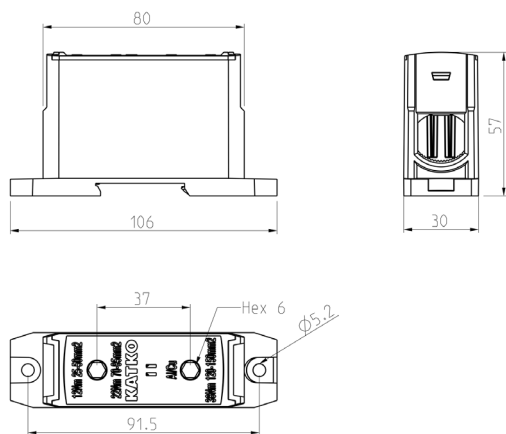


KL1X150

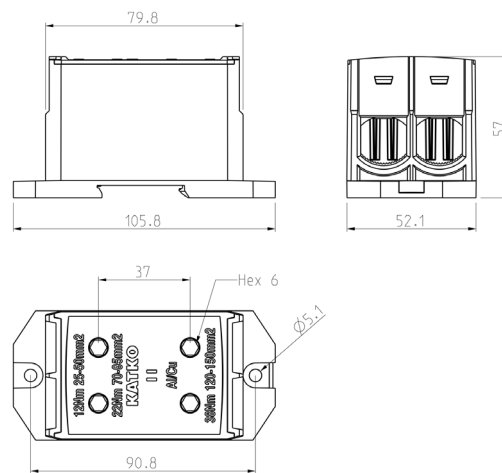


KL2X150

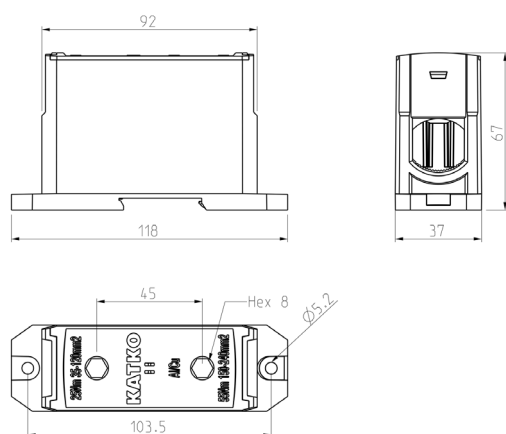


KL1X240

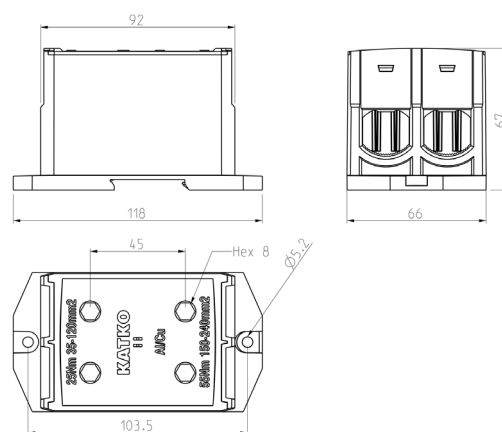

KL2X240

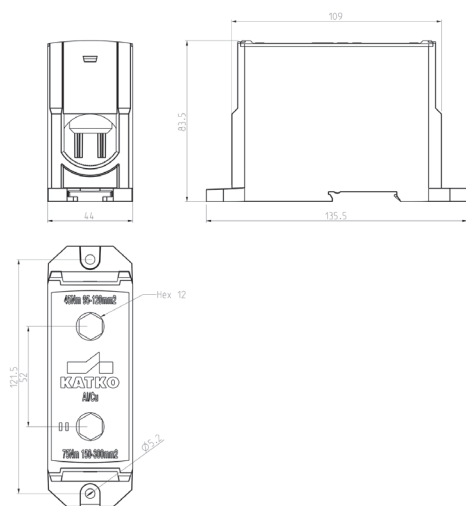


KL1X300

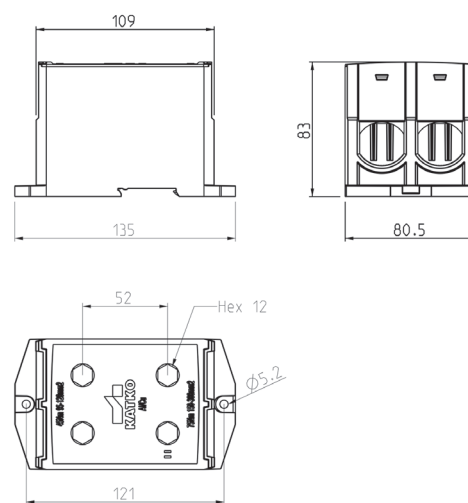


KL2X300


DIMENSIONAL DRAWINGS ENCLOSED TERMINAL BLOCKS

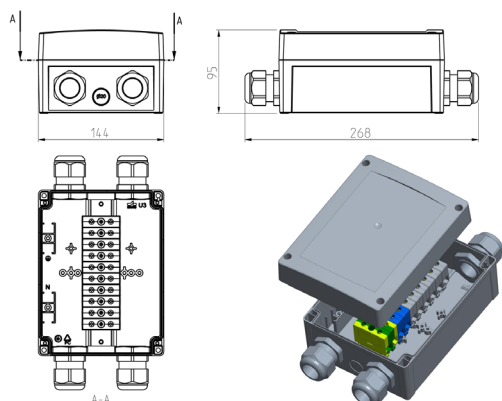


KLM2X16

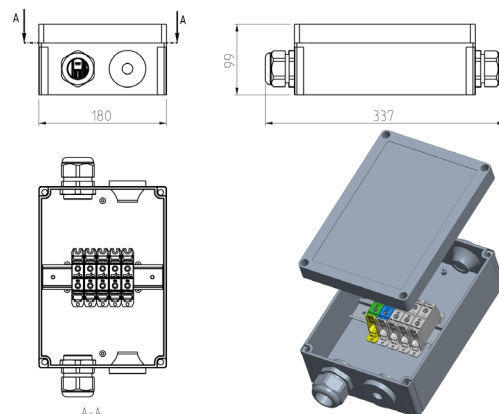


KLM1X50

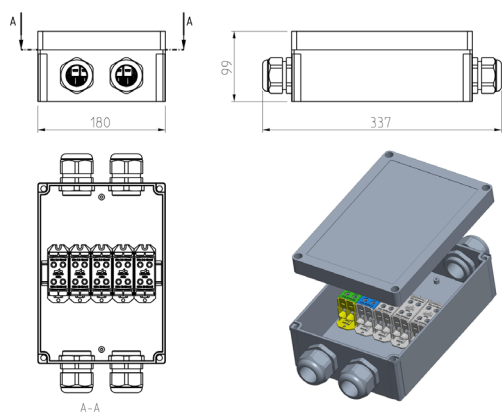


KLM2X50

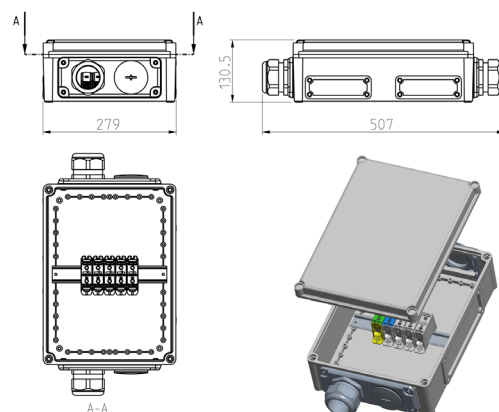


KLM1X95

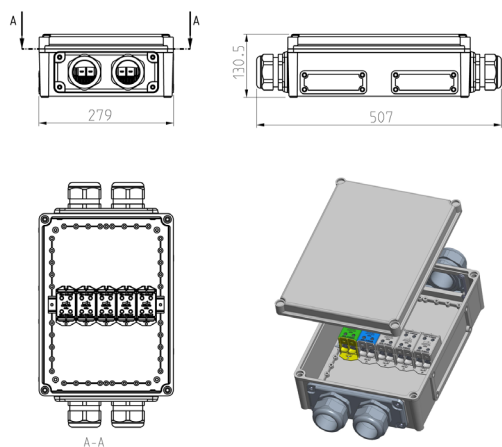


KLM2X95

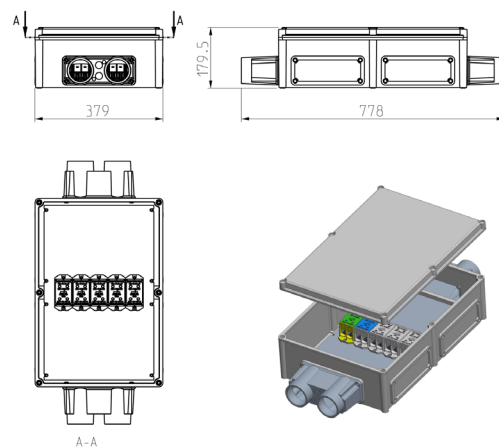


KLM2X150

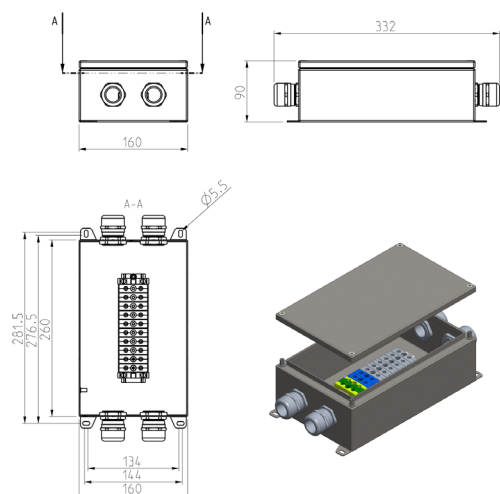


KLR2X16

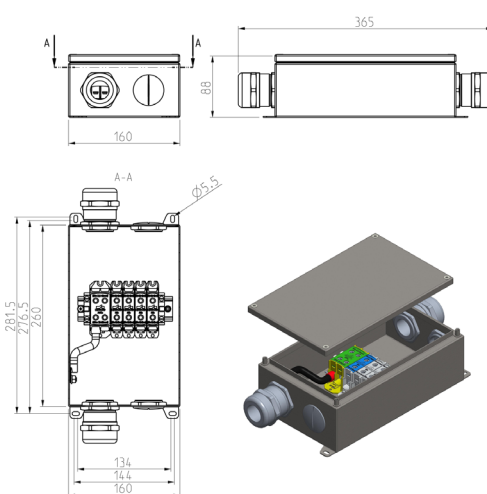


KLR1X50

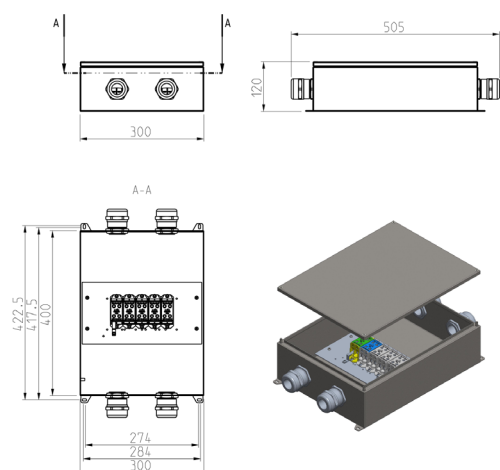


KLR2X50

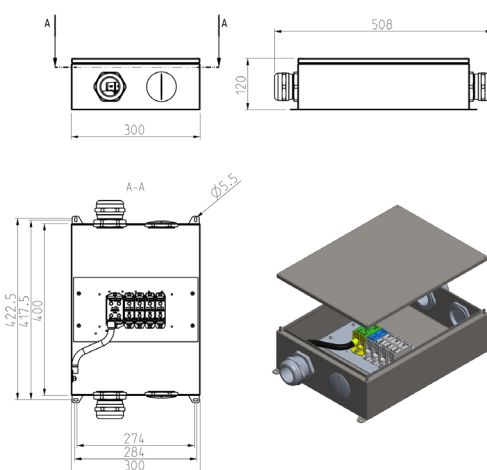

KLR1X95

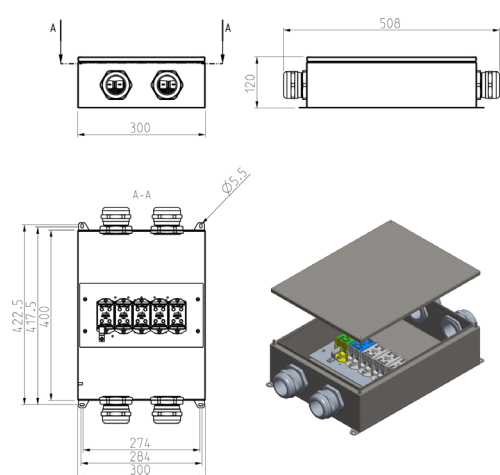


KLR2X95


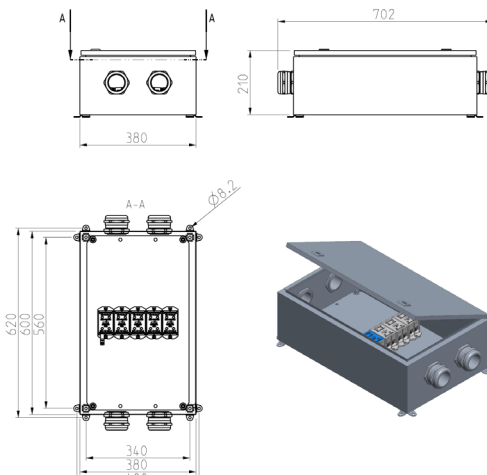


KLR2X150



DIMENSIONAL DRAWINGS KKL CABLE CONNECTORS

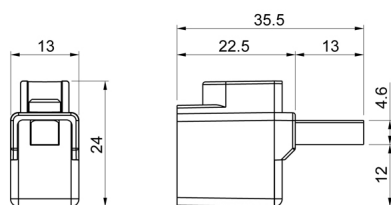



KKL1X16

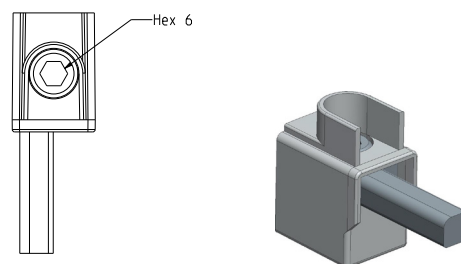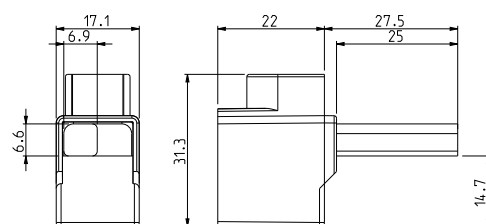


KKL1X50T1

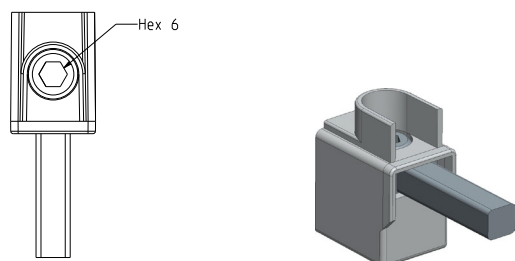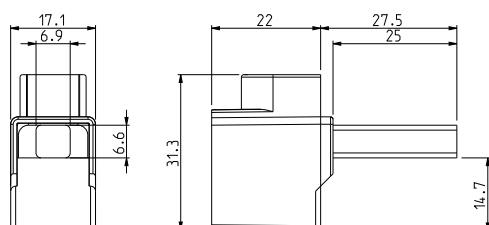


KKL1X50T2

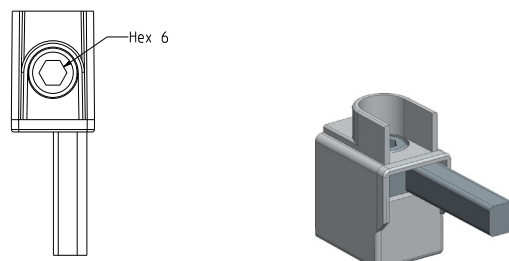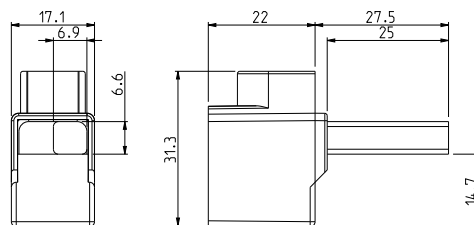


KKL2X50T3

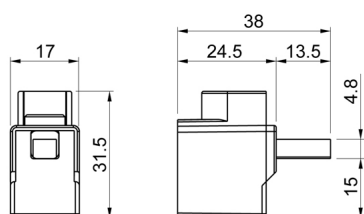


KKL1X50M

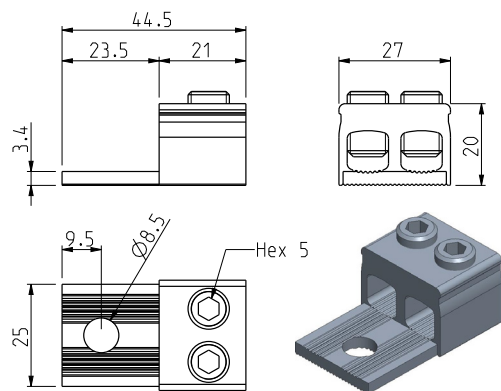


KKL2X50M

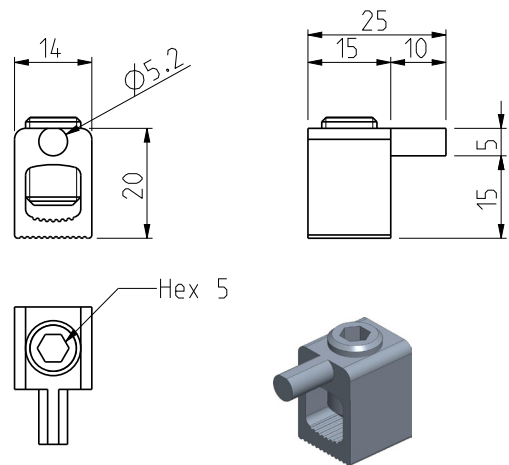


KKL1X50N

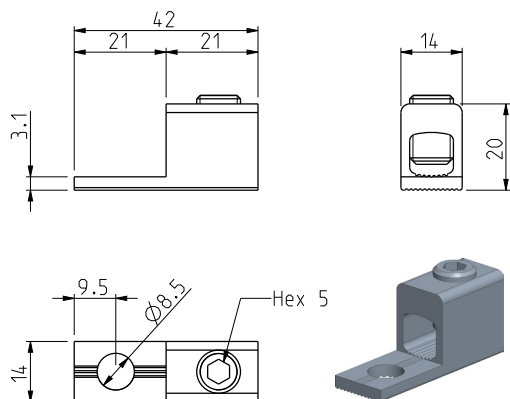


KKL1X50

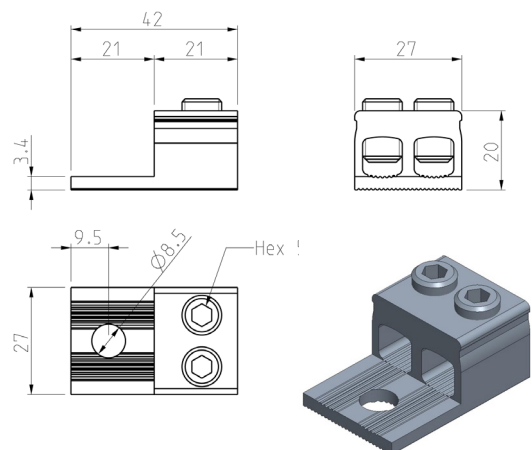


KKL2X50

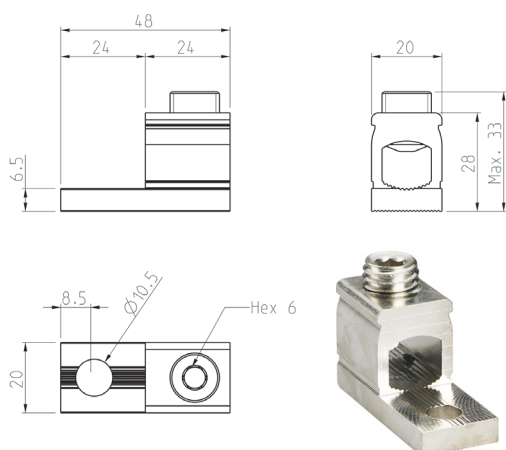


KKL1X95

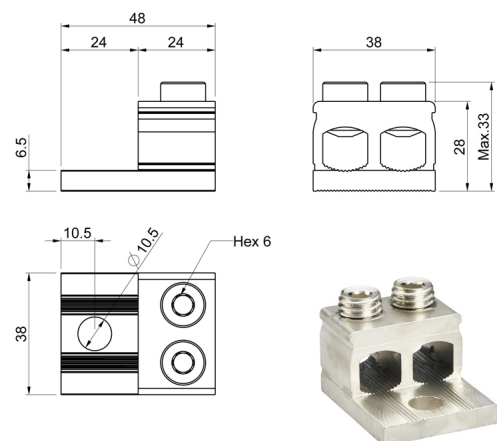


KKL2X95

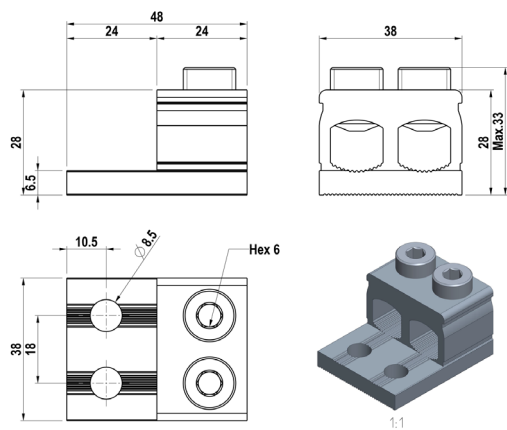


KKL2X95LR

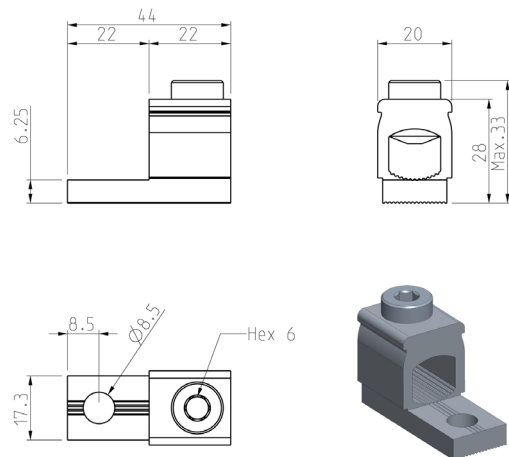


KKL1X95M

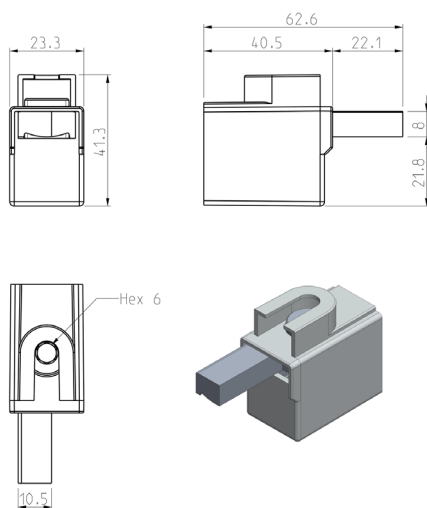


KKL1X120T1

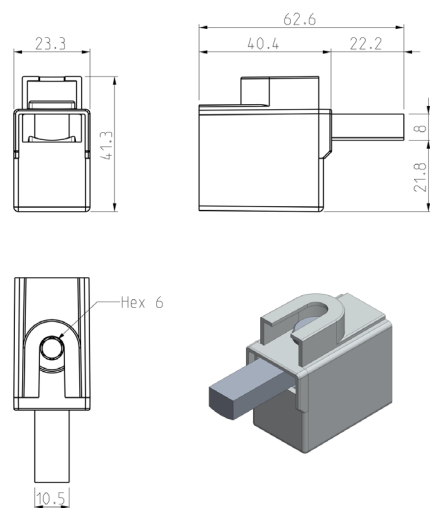


KKL1X120T2

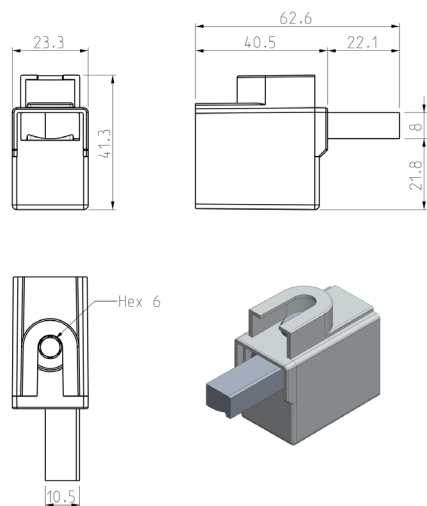


KKL1X120T3

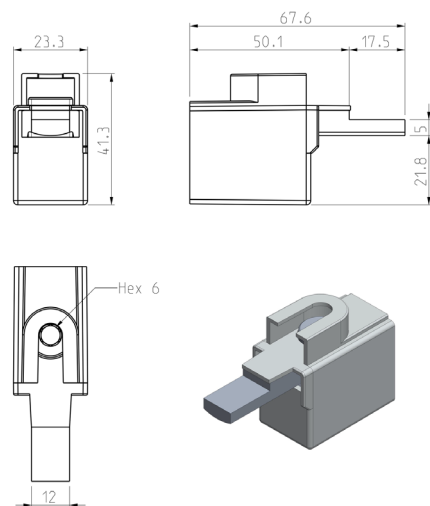


KKL1X120T

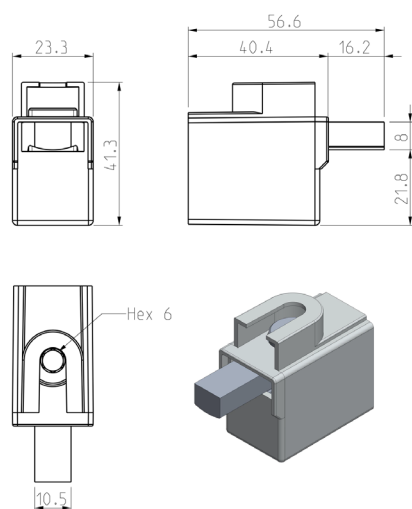


KKL1X120TM

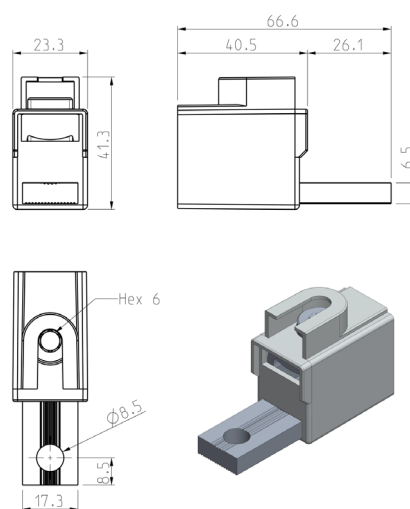


KKL1X120RS

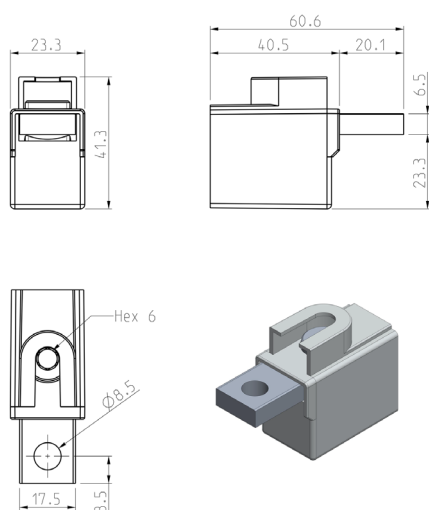


KKL1X120RSY

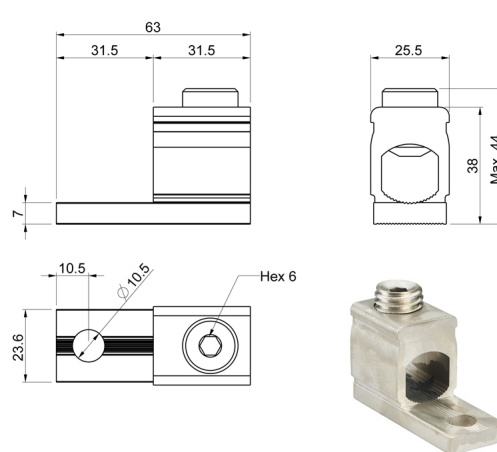


KKL1X150

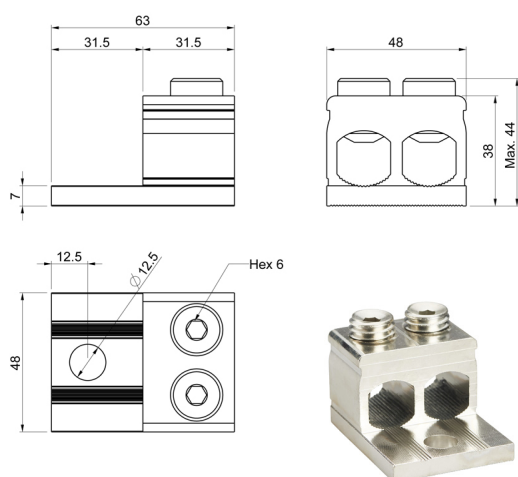


KKL2X150

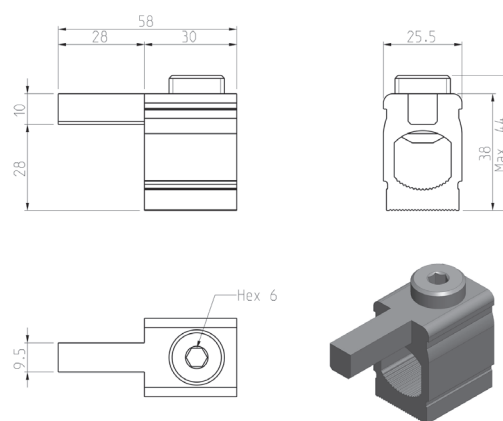


KKL1X150T2

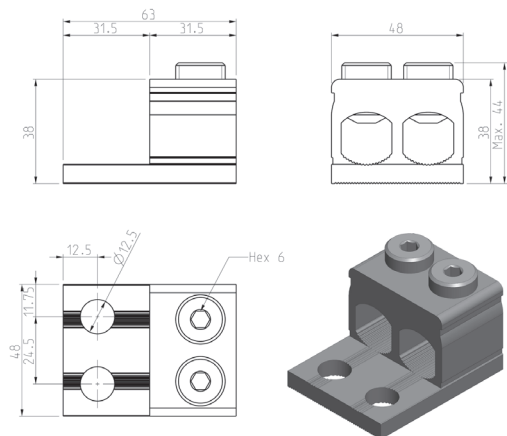


KKL2X150LR

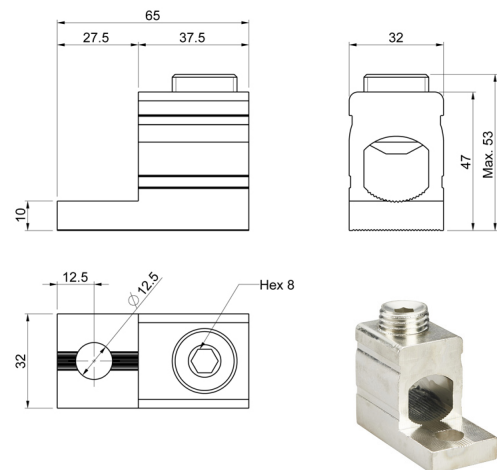


KKL1X240

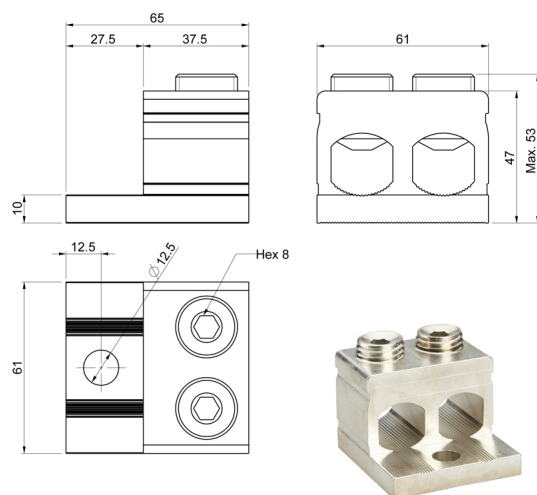


KKL2X240

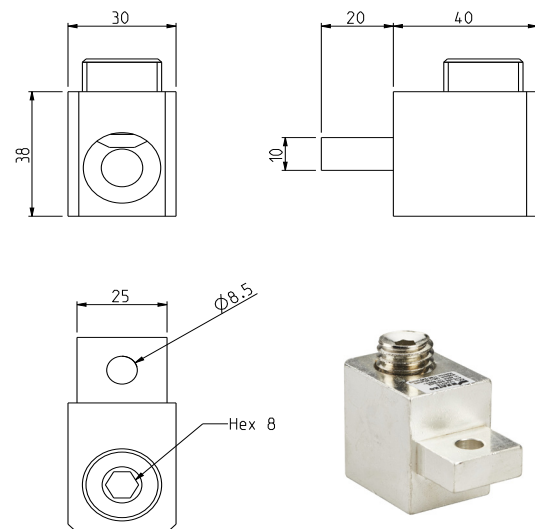

KKL1X240TE

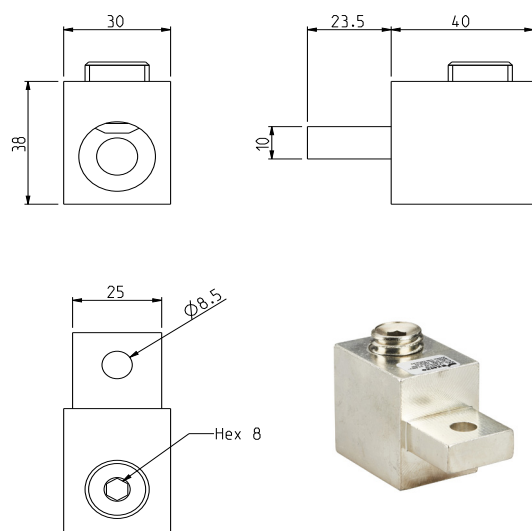


KKL1X240TM

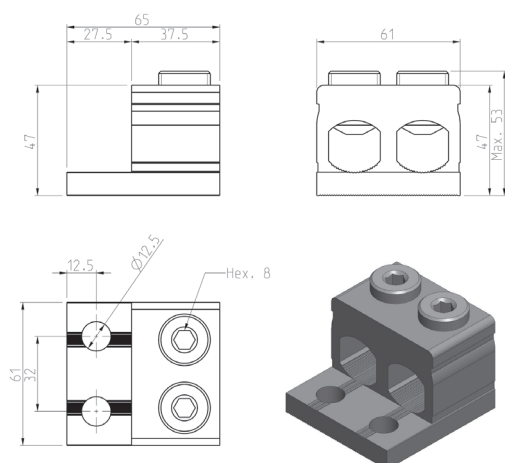


KKL2X240LR


DIMENSIONAL DRAWINGS CABLE CONNECTORS & KKL VERTICAL CABLE CONNECTORS

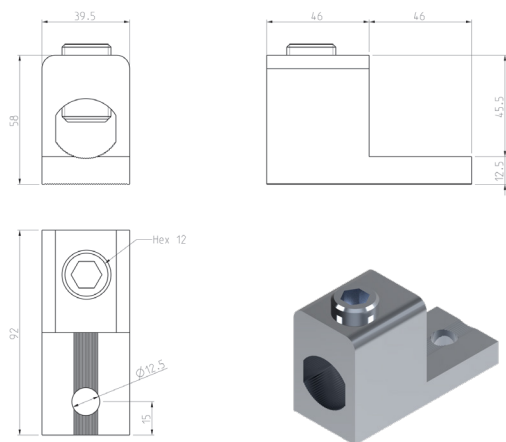


KKL1X300

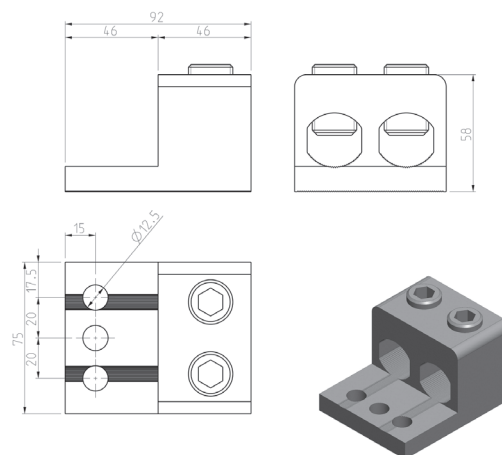


KKL2X300

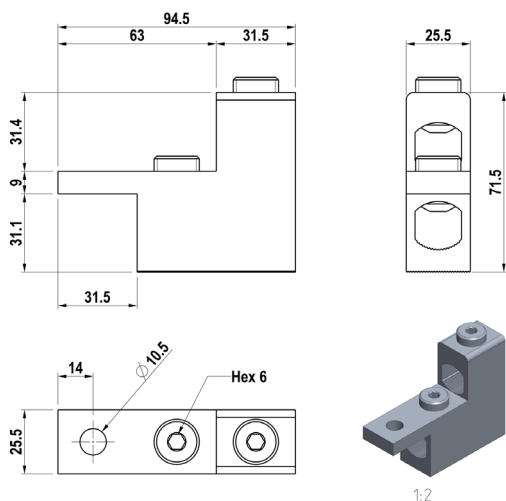


KKL2X150VM

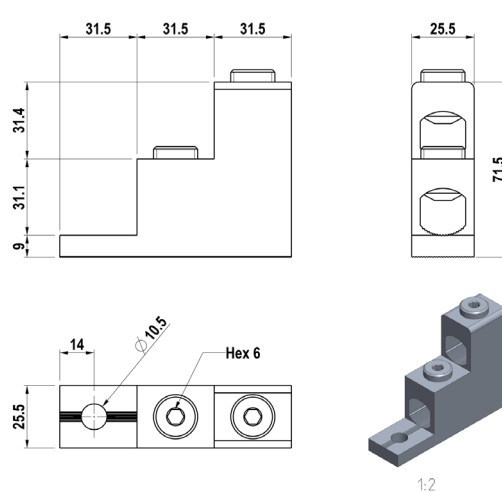

KKL2X150VB

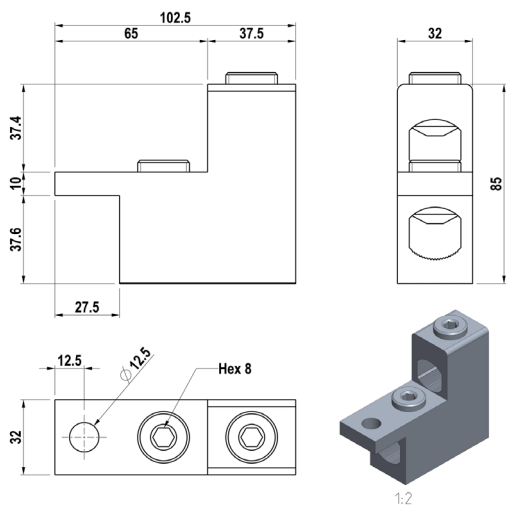


KKL2X240VM

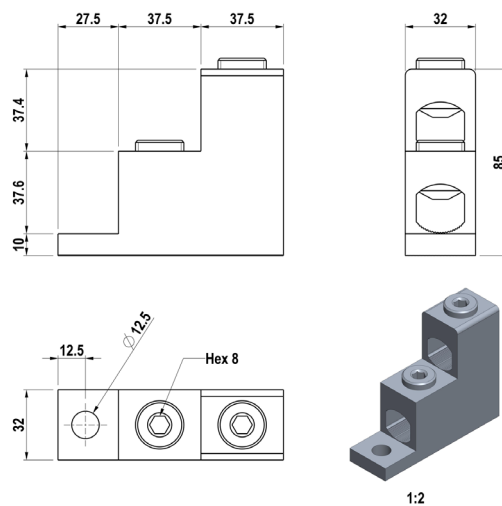


KKL2X240VB


DIMENSIONAL DRAWINGS KKL VERTICAL CABLE CONNECTORS & KLH CABLE CONNECTORS

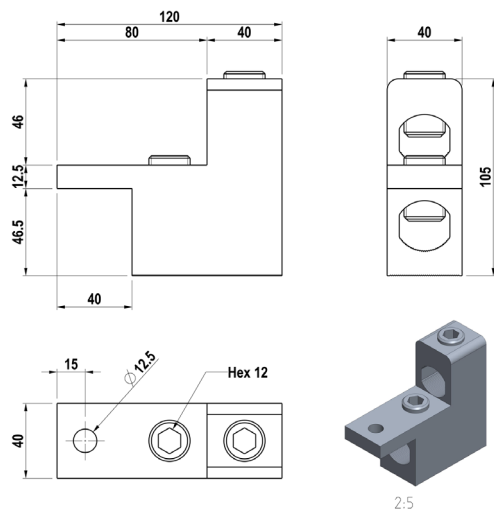


KKL2X300VM

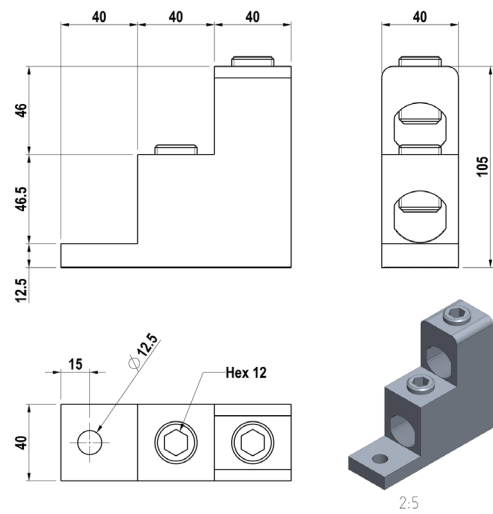


KKL2X300VB

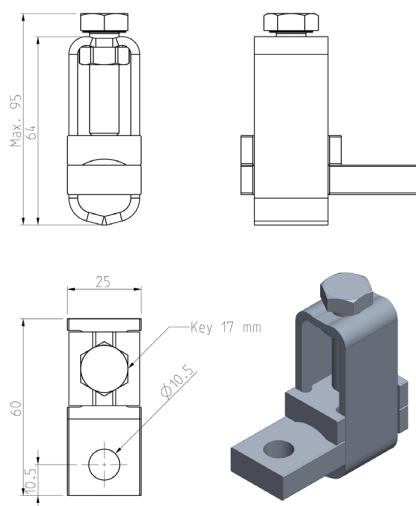

KLH2X150

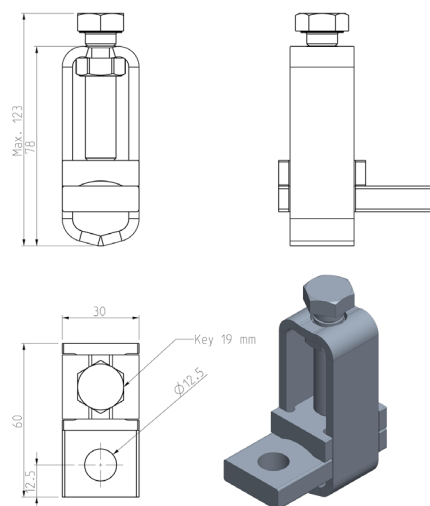

KLH2X240

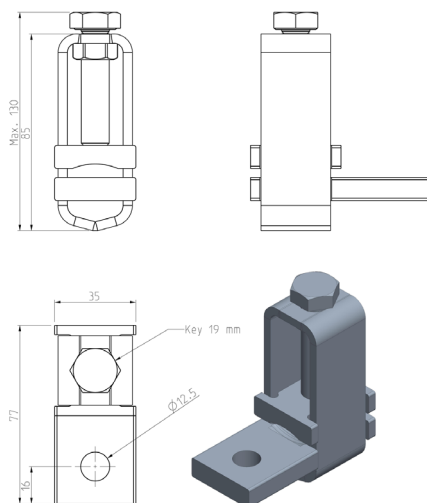

KLH2X300

NUMBER OF CONDUCTORS SIMULTANEOUSLY CONNECTABLE TO THE TERMINAL

					Cross section (mm ²)/ number of conductors simultaneously connectable to the terminal															
KL	Type	In [A]	Torque [Nm]		1,5	2,5	4	6	10	16	25	35	50	70	95	120	150	185	240	300
	1X16*	75	5 Nm (2,5-16 mm ²)	Al	-	1	1	1	1	1	-	-	-	-	-	-	-	-	-	-
		76		Cu	3	3	3	2	1	1	-	-	-	-	-	-	-	-	-	-
	1X50* 3X50* 3X1X50*	160	5Nm (2,5-16mm ²)	Al	-	1	1	1	1	1	1	1	1	-	-	-	-	-	-	-
			10Nm (25-50mm ²)	Cu	-	3	3	3	3	2	1	1**	1	-	-	-	-	-	-	-
	2X50*	200	5Nm (2,5-16mm ²)	Al	-	1	1	1	1	1	1	1	1	-	-	-	-	-	-	-
		320	10Nm (25-50mm ²)	Cu	-	3	3	3	3	2	1	1**	1	-	-	-	-	-	-	-
	1X95* 3X95* 3X1X95*	200	12Nm (16-50mm ²)	Al	-	-	-	-	-	1	1	1	1	1	1	-	-	-	-	-
		245	22Nm (70-95mm ²)	Cu	-	-	-	-	-	3	2	2	1	1**	1	-	-	-	-	-
	2X95*	400	12Nm (16-50mm ²)	Al	-	-	-	-	-	1	1	1	1	1	1	-	-	-	-	-
		490	22Nm (70-95mm ²)	Cu	-	-	-	-	-	3	2	2	1	1**	1	-	-	-	-	-
	1X150*	250 320	12Nm (25-50mm ²)	Al Cu	-	-	-	-	-	-	1 3	1 3	1 2	1 1	1 1	1 1**	1 1	-	-	-
			22Nm (70-95mm ²)																	
			38Nm (120-150mm ²)																	
	2X150*	500 640	12Nm (25-50mm ²)	Al Cu	-	-	-	-	-	-	1 3	1 3	1 2	1 1	1 1	1 1**	1 1	-	-	-
			22Nm (70-95mm ²)																	
			38Nm (120-150mm ²)																	
	1X240*	315	25Nm (35-120mm ²)	Al	-	-	-	-	-	-	-	1 3	1 3	1 2	1 1	1 1	1 1	1 1	1 1	1 1
		425	55Nm (150-240mm ²)	Cu																
	2X240*	630	25Nm (35-120mm ²)	Al	-	-	-	-	-	-	-	1 3	1 3	1 2	1 1	1 1	1 1	1 1	1 1	1 1
		850	55Nm (150-240mm ²)	Cu																
	1X300*	400	45 Nm (95-120 mm ²)	Al	-	-	-	-	-	-	-	-	-	-	1 2	1 2	1 1	1 1	1 1	1 1
		520	75 Nm (150-300 mm ²)	Cu																
	2X300*	800	45 Nm (95-120 mm ²)	Al	-	-	-	-	-	-	-	-	-	-	1 2	1 2	1 1	1 1	1 1	1 1
		1040	75 Nm (150-300 mm ²)	Cu																

					Cross section (mm ²)/ number of conductors simultaneously connectable to the terminal															
KLH	Type	In [A]	Torque [Nm]		1,5	2,5	4	6	10	16	25	35	50	70	95	120	150	185	240	300
	2X150	455	44 Nm (50-150 mm ²)	Al	-	-	-	-	-	-	-	-	1 2	1 1	1 1	1 1	1 1	-	-	-
		579		Cu																
	2X240	631	75 Nm (95-240 mm ²)	Al	-	-	-	-	-	-	-	-	-	-	1 2	1 2	1 1	1 1	1 1	-
		806		Cu																
	2X300	810	75 Nm (185-300 mm ²)	Al	-	-	-	-	-	-	-	-	-	-	-	-	-	1 1	1 1	1 1
		1035		Cu																

* N = Blue = only for one neutral conductor

* PE = Yellow/green = only for one protective conductor

** Biggest fine-strand conductors


Cu conductors may be solid, multi-strand or fine-strand conductors. With fine strand conductors use of cable end sleeve is recommended but not required.

	Type	In [A]	Torque [Nm]		Cross section (mm ²)/ number of conductors simultaneously connectable to the terminal															
					1,5	2,5	4	6	10	16	25	35	50	70	95	120	150	185	240	300
					1	1	1	1	1	1	-	-	-	-	-	-	-	-	-	-
KKL	1X16	63	2,2Nm (1,5-16mm ²)	Al	3	3	3	2	1**	1	-	-	-	-	-	-	-	-	-	-
				Cu	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	1X50	160	5Nm (2,5-16mm ²)	Al	-	-	-	-	-	1	1	1	1	-	-	-	-	-	-	-
			10Nm (25-50mm ²)	Cu	-	3	3	3	3	2	1	1**	1	-	-	-	-	-	-	-
	1X50N	125	5Nm (2,5-16mm ²)	Al	-	-	-	-	-	1	1	1	1	-	-	-	-	-	-	-
			10Nm (25-50mm ²)	Cu	-	3	3	3	3	2	1	1**	1	-	-	-	-	-	-	-
	1X50M	125	5Nm (2,5-16mm ²)	Al	-	-	-	-	-	1	1	1	1	-	-	-	-	-	-	-
			10Nm (25-50mm ²)	Cu	-	3	3	3	3	2	1	1**	1	-	-	-	-	-	-	-
	1X50T1	125	5Nm (2,5-16mm ²)	Al	-	-	-	-	-	1	1	1	1	-	-	-	-	-	-	-
			10Nm (25-50mm ²)	Cu	-	3	3	3	3	2	1	1**	1	-	-	-	-	-	-	-
	1X50T2	125	5Nm (2,5-16mm ²)	Al	-	-	-	-	-	1	1	1	1	-	-	-	-	-	-	-
			10Nm (25-50mm ²)	Cu	-	3	3	3	3	2	1	1**	1	-	-	-	-	-	-	-
	1X50T3	125	5Nm (2,5-16mm ²)	Al	-	-	-	-	-	1	1	1	1	-	-	-	-	-	-	-
			10Nm (25-50mm ²)	Cu	-	3	3	3	3	2	1	1**	1	-	-	-	-	-	-	-
	2X50	200	5Nm (2,5-16mm ²)	Al	-	1	1	1	1	1	1	1	1	-	-	-	-	-	-	-
		320	10Nm (25-50mm ²)	Cu	-	3	3	3	3	2	1	1**	1	-	-	-	-	-	-	-
	2X50M	200	5Nm (2,5-10mm ²)	Al	-	1	1	1	1	1	1	1	1	-	-	-	-	-	-	-
		320	10Nm (16-50mm ²)	Cu	-	3	3	3	3	2	1	1**	1	-	-	-	-	-	-	-
	1X95	200	12Nm (16-50mm ²)	Al	-	-	-	-	-	1	1	1	1	1	1	-	-	-	-	-
		245	22Nm (70-95mm ²)	Cu	-	-	-	-	-	3	2	2	1	1**	1	-	-	-	-	-
	1X95M	200	12Nm (16-50mm ²)	Al	-	-	-	-	-	1	1	1	1	1	1	-	-	-	-	-
		245	22Nm (70-95mm ²)	Cu	-	-	-	-	-	3	2	2	1	1**	1	-	-	-	-	-
	2X95	400	12Nm (16-50mm ²)	Al	-	-	-	-	-	1	1	1	1	1	1	-	-	-	-	-
	2X95LR	490	22Nm (70-95mm ²)	Cu	-	-	-	-	-	3	2	2	1	1**	1	-	-	-	-	-
	1X120	200	12Nm (16-50mm ²)	Al	-	-	-	-	-	1	1	1	1	1	1	1	-	-	-	-
		245	22Nm (70-120mm ²)	Cu	-	-	-	-	-	3	2	2	1	1**	1	1	-	-	-	-
	1X120RS	200	12Nm (16-50mm ²)	Al	-	-	-	-	-	1	1	1	1	1	1	1	-	-	-	-
		245	22Nm (70-120mm ²)	Cu	-	-	-	-	-	3	2	2	1	1**	1	1	-	-	-	-
	1X120RSY	200	12Nm (16-50mm ²)	Al	-	-	-	-	-	1	1	1	1	1	1	1	-	-	-	-
		245	22Nm (70-120mm ²)	Cu	-	-	-	-	-	3	2	2	1	1**	1	1	-	-	-	-
	1X120T	200	12Nm (16-50mm ²)	Al	-	-	-	-	-	1	1	1	1	1	1	1	-	-	-	-
		245	22Nm (70-120mm ²)	Cu	-	-	-	-	-	3	2	2	1	1**	1	1	-	-	-	-
	1X120T1	200	12Nm (16-50mm ²)	Al	-	-	-	-	-	1	1	1	1	1	1	1	-	-	-	-
		245	22Nm (70-120mm ²)	Cu	-	-	-	-	-	3	2	2	1	1**	1	1	-	-	-	-
	1X120T2	200	12Nm (16-50mm ²)	Al	-	-	-	-	-	1	1	1	1	1	1	1	-	-	-	-
		245	22Nm (70-120mm ²)	Cu	-	-	-	-	-	3	2	2	1	1**	1	1	-	-	-	-
	1X120T3	200	12Nm (16-50mm ²)	Al	-	-	-	-	-	1	1	1	1	1	1	1	-	-	-	-
		245	22Nm (70-120mm ²)	Cu	-	-	-	-	-	3	2	2	1	1**	1	1	-	-	-	-
	1X120TM	200	12Nm (16-50mm ²)	Al	-	-	-	-	-	1	1	1	1	1	1	1	-	-	-	-
		245	22Nm (70-120mm ²)	Cu	-	-	-	-	-	3	2	2	1	1**	1	1	-	-	-	-
	1X150	250	12Nm (25-50mm ²)	Al	-	-	-	-	-	-	1	1	1	1	1	1	1	-	-	-
		320	22Nm (70-95mm ²)	Cu	-	-	-	-	-	-	3	3	2	1	1	1**	1	-	-	-
			38Nm (120-150mm ²)																	
	2X150	500	12Nm (25-50mm ²)	Al	-	-	-	-	-	-	1	1	1	1	1	1	1	-	-	-
		640	22Nm (70-95mm ²)	Cu	-	-	-	-	-	-	3	3	2	1	1	1**	1	-	-	-
			38Nm (120-150mm ²)																	
	2X150VB	500	12 Nm (25-50 mm ²)	Al	-	-	-	-	-	-	1	1	1	1	1	1	1	-	-	-
		640	22 Nm (70-95 mm ²)	Cu	-	-	-	-	-	-	3	3	2	1	1	1**	1	-	-	-
			38 Nm (120-150 mm ²)																	
	2X150VB	500	12 Nm (25-50 mm ²)	Al	-	-	-	-	-	-	1	1	1	1	1	1	1	-	-	-
		640	22 Nm (70-95 mm ²)	Cu	-	-	-	-	-	-	3	3	2	1	1	1**	1	-	-	-
			38 Nm (120-150 mm ²)																	
	1X240	315	25Nm (35-120mm ²)	Al	-	-	-	-	-	-	-	1	1	1	1	1	1	1	1	-
		425	55Nm (150-240mm ²)	Cu	-	-	-	-	-	-	-	3	3	2	1	1	1	1**	1	-
	2X240	630	25Nm (35-120mm ²)	Al	-	-	-	-	-	-	-	1	1	1	1	1	1	1	1	-
		850	55Nm (150-240mm ²)	Cu	-	-	-	-	-	-	-	3	3	2	1	1	1	1**	1	-
	2X240VB	630	25Nm (35-120mm ²)	Al	-	-	-	-	-	-	-	1	1	1	1	1	1	1	1	-
		850	55Nm (150-240mm ²)	Cu	-	-	-	-	-	-	-	3	3	2	1	1	1	1**	1	-
	2X240VM	630	25Nm (35-120mm ²)	Al	-	-	-	-	-	-	-	1	1	1	1	1	1	1	1	-
		850	55Nm (150-240mm ²)	Cu	-	-	-	-	-	-	-	3	3	2	1	1	1	1**	1	-
	1X300	400	45 Nm (95-120 mm2)	Al	-	-	-	-	-	-	-	-	-	-	1	1	1	1	1	1
		520	75 Nm (150-300 mm2)	Cu	-	-	-	-	-	-	-	-	-	-	2	2	1	1	1**	1
	2X300	800	45 Nm (95-120 mm2)	Al	-	-	-	-	-	-	-	-	-	-	1	1	1	1	1	1
		1040	75 Nm (150-300 mm2)	Cu	-	-	-	-	-	-	-	-	-	-	2	2	1	1	1**	1
	2X300VB	800	45 Nm (95-120 mm2)	Al	-	-	-	-	-	-	-	-	-	-	1	1	1	1	1	1
		1040	75 Nm (150-300 mm2)	Cu	-	-	-	-	-	-	-	-	-	-	2	2	1	1	1**	1
	2X300VM	800	45 Nm (95-120 mm2)	Al	-	-	-	-	-	-	-	-	-	-	1	1	1	1	1	1
		1040	75 Nm (150-300 mm2)	Cu	-	-	-	-	-	-	-	-	-	-	2	2	1	1	1**	1

** Biggest fine-strand conductors

Cu conductors may be solid, multi-strand or fine-strand conductors. With fine strand conductors use of cable end sleeve is recommended but not required.

COMPATIBILITY TABLE KATKO SWITCHES AND CABLE CONNECTORS

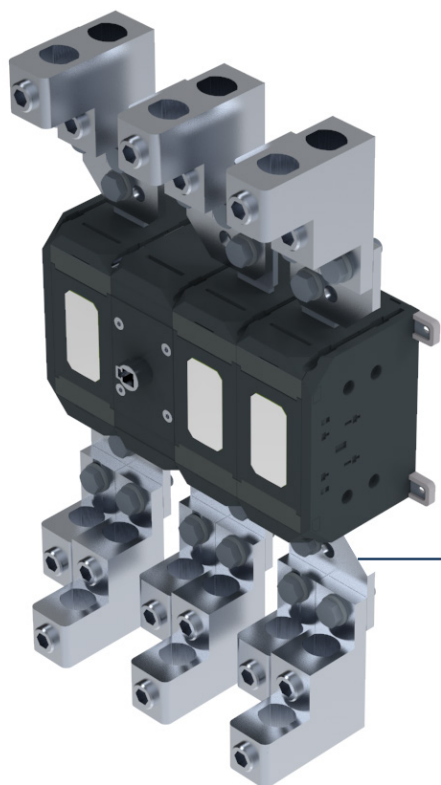


- Following tables show compatibility of KATKO switches and cable connectors and most common combinations
- With spreaders it is possible to mount different combinations of connectors and switches that are not shown in these tables. Ask your local sales person for more information.

SPREADER (ALK 800)


**KU 3800 + 3 X KKL2X300VB (TOP) + 3 X KKL1X300 (TOP)
+ 3 X KKL2X300VB (BOTTOM) + 3 X KKL1X300 (BOTTOM)**

Switch	KU					
A	16 - 40 (N)	63 - 80 (N) (3-pole)	100 - 160 (3-pole)	160L + 200 - 250	315 - 400	630 - 800 (3-pole)
16 mm ²	KKL1X16 (only top)	KKL1X16 (only top)	-	-	-	-
50 mm ²	KKL1X50M (only top)	KKL1X50T2	KKL1X50T2	KKL2X50	-	-
95 mm ²	-	-	-	KKL1X95	-	-
120 mm ²	-	-	KKL1X120T	-	-	-
150 mm ²	-	-	-	KKL1X150, KKL2X150VM, KKL2X150VB, KLH2X150	KKL1X150, KKL2X150VM, KKL2X150VB, KL- H2X150	KKL2X150, KKL2X150VB, KKL2X150VM, KLH2X150
240 mm ²	-	-	-	KKL2X240, KKL2X240VB, KKL2X240VM, KLH2X240	KKL2X240, KKL2X240VB, KKL2X240VM, KL- H2X240	KKL2X240, KKL2X240VB, KKL2X240VM, KLH2X240
300 mm ²	-	-	-	-	-	KKL2X300, KKL2X300VB, KKL2X300VM, KLH2X300

COMPATIBILITY TABLE & DIMENSIONAL DRAWINGS OF SPREADERS

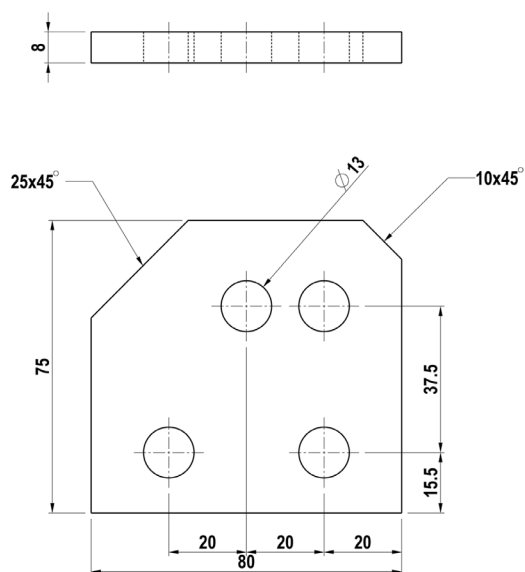


ALK 800

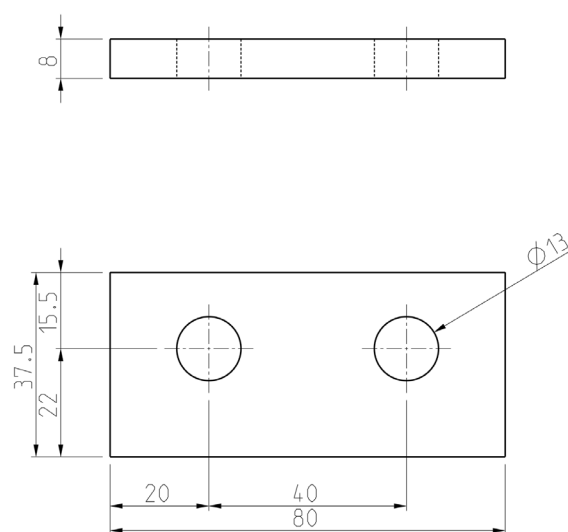


ALK 800C

Switch	VKE			
A	125 - 160	200 - 250	315 - 400	630
16 mm ²	-	-	-	-
50 mm ²	KKL1X50T2	KKL2X50	KKL2X50	-
95 mm ²	-	KKL1X95, KKL2X95	KKL2X95	-
120 mm ²	KKL1X120T2	KKL1X120RS	-	-
150 mm ²	KKL1X150T2 + LS125	KKL1X150, KKL2X150LR, KLH2X150, KKL2X150VM, KKL2X150VB	KKL1X150, KKL2X150LR, KLH2X150, KKL2X150VM, KKL2X150VB	KKL2X150, KKL2X150VB, KKL2X150VM, KLH2X150
240 mm ²	-	KKL1X240, KKL2X240LR, KLH2X240, KKL2X240VB, KKL2X240VM	KKL1X240, KKL2X240LR, KLH2X240, KKL2X240VB, KKL2X240VM	KKL2X240, KKL2X240VB, KKL2X240VM, KLH2X240
300 mm ²	-	-	-	KKL2X300, KKL2X300VB, KKL2X300VM, KLH2X300

COMPATIBILITY TABLE & DIMENSIONAL DRAWINGS OF SPREADERS


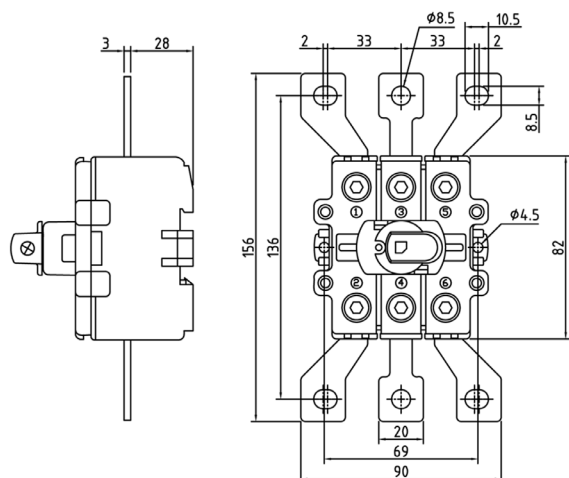


ALK 3160 & VKA 3160 Switch

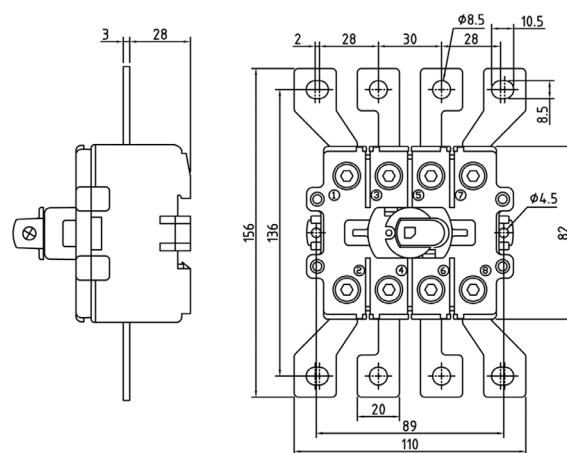

ALK 4160 & VKA 4160 Switch

Switch	KUE		EVA		VKA
A	16 - 40 (3-pole)	63 - 125 (3-pole)	125 - 160	200 - 250	200 - 250
16 mm ²	KKL1X16 (only top)	KKL1X16 (only top)	-	-	-
50 mm ²	KKL1X50M (only top)	KKL1X50T2	KKL1X50T2	KKL2X50	KKL2X50
95 mm ²	-	-	-	KKL1X95	KKL1X95
120 mm ²	-	-	KKL1X120T1 + KKL1X120T2 + KKL1X120T3	KKL1X120RS	KKL1X120RS
150 mm ²	-	-	-	-	-
240 mm ²	-	-	-	-	-
300 mm ²	-	-	-	-	-

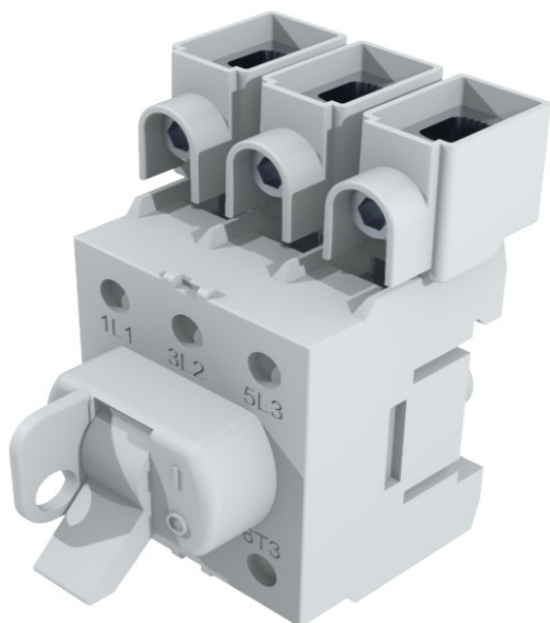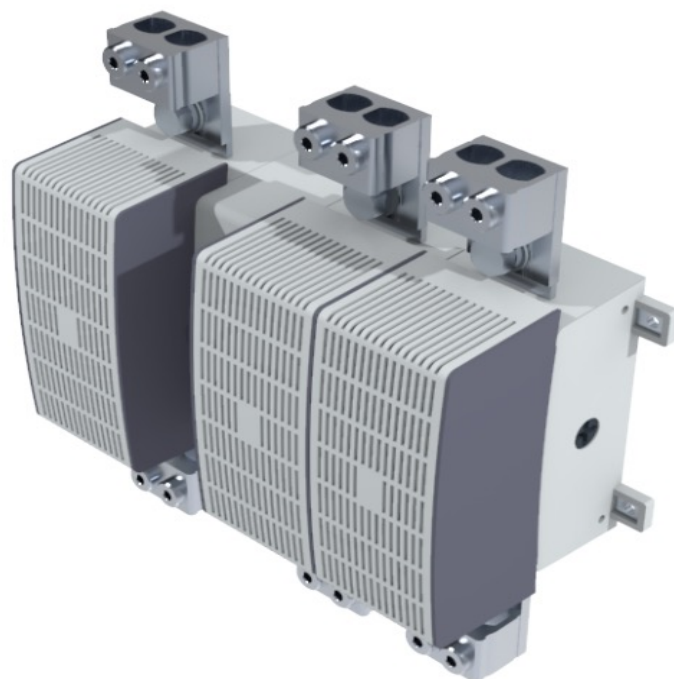**KUE 363 + 3 X KKL1X50T2****KVKE 3630 + 6 X KKL2X150**

Switch	KVKE			
A	63 - 160 (3-pole)	200 - 250 (3-pole)	315 - 400	630
16 mm ²	-	-	-	-
50 mm ²	KKL1X50T2	KKL2X50	KKL2X50	-
95 mm ²	-	KKL1X95, KKL2X95	KKL2X95	-
120 mm ²	KKL1X120T2	KKL1X120RS	-	-
150 mm ²	KKL1X150T2 + LS125	KKL1X150, KKL2X150LR, KLH2X150, KKL2X150VM, KKL2X150VB	KKL1X150, KKL2X150LR, KLH2X150, KKL2X150VM, KKL2X150VB	KKL2X150, KKL2X150VB, KKL2X150VM
240 mm ²	-	KKL1X240, KKL2X240LR, KLH2X240, KKL2X240VB, KKL2X240VM	KKL1X240, KKL2X240LR, KLH2X240, KKL2X240VB, KKL2X240VM	KKL2X240, KKL2X240VB, KKL2X240VM, KLH2X240
300 mm ²	-	-	-	KKL2X300, KKL2X300VB, KKL2X300VM, KLH2X300



ConnectSafe

KATKO Oy

www.katko.com
info@katko.com
+358 (0)9 849 600

Ruosilantie 2
00390, Helsinki, Finland