


EMC-PROTECTED SAFETY SWITCHES / ISOLATORS 16-630 A



- Electromagnetic compatibility ensures safe operation in environments with electromagnetic disturbance
- Tested according to EMC EN 61000-6-3:2007+A1(2011) with EMC- glands shielded power cable
- IP66; Enclosure types U2, U3, A2, A3
- IP65; Enclosure types TR02, TR03, TR04
- Available in polycarbonate up to 80 A, aluminium up to 125 A and sheet steel up to 630 A
- Also available in TR02, TR03 and TR04 enclosures
- Padlockable
- Door interlock with defeat mechanism
- EMC cable glands included

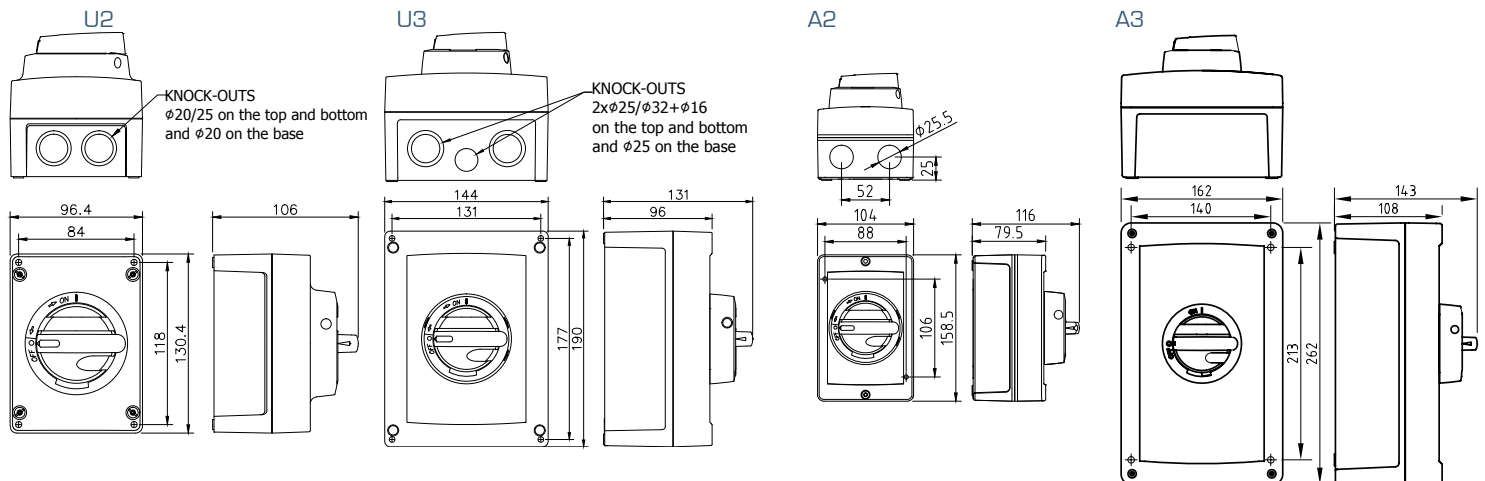

Type		AC-21	400 V	AC-22	400 V	AC-23		AC-23	690 V	EAN-Code 6419410...		Enclosure	Cable glands	Weight kg
			415 V		415 V		400 V							
			690 V		690 V		415 V							
Grey/black	Yellow/red	I _n / A	I _n / A	I _n / A	P / kW	I _n / A	P / kW	Grey/black	Yellow/red					
Polycarbonate enclosures														
KEM 316U/EMC	KEM 316U/EMC Y/R	25 A	16 A	16 A	7.5 kW	16 A	11 kW	...329207	...329252	U2	2xM25	0.6		
KEM 325U/EMC	KEM 325U/EMC Y/R	40 A	25 A	25 A	11 kW	25 A	22 kW	...329214	...329269	U2	2xM25	0.6		
KEM 340U/EMC	KEM 340U/EMC Y/R	63 A	40 A	40 A	22 kW	32 A	30 kW	...329221	...329276	U2	2xM25	0.8		
KEM 363U/EMC	KEM 363U/EMC Y/R	80 A	63 A	40 A	22 kW	40 A	37 kW	...329238	...329283	U3	2xM32	0.8		
KEM 380U/EMC	KEM 380U/EMC Y/R	100 A	80 A	63 A	30 kW	40 A	37 kW	...329245	...329290	U3	2xM32	0.8		
KEM 3100UEMC	KEM 3100UEMC Y/R	125 A	100 A	100 A	55 kW	63 A	55 kW	...315484	...315521	U4	2xM40	1		
KEM 3125UEMC	KEM 3125UEMC Y/R	160 A	125 A	125 A	55 kW	80 A	75 kW	...315491	...315538	U4	2xM40	1		
Aluminium enclosures														
KEA 316U/EMC	KEA 316U/EMC Y/R	25 A	16 A	16 A	7.5 kW	16 A	11 kW	...483008	...483039	A2	2xM25	0.8		
KEA 325U/EMC	KEA 325U/EMC Y/R	40 A	25 A	25 A	11 kW	25 A	22 kW	...483015	...483046	A2	2xM25	0.8		
KEA 340U/EMC	KEA 340U/EMC Y/R	63 A	40 A	40 A	22 kW	32 A	30 kW	...483022	...483053	A2	2xM25	0.8		
KEA 363U/EMC	KEA 363U/EMC Y/R	80 A	63 A	40 A	22 kW	40 A	37 kW	...336601	...336465	A3	2xM40	2.1		
KEA 380U/EMC	KEA 380U/EMC Y/R	100 A	80 A	63 A	30 kW	40 A	37 kW	...336618	...336472	A3	2xM40	2.1		
KEA 3100UEMC	KEA 3100UEMC Y/R	125 A	100 A	100 A	55 kW	63 A	55 kW	...315507	...315545	A3	2xM40	3.5		
KEA 3125U/EMC	KEA 3125U/EMC Y/R	160 A	125 A	125 A	55 kW	80 A	75 kW	...336625	...336489	A3	2xM40	3.5		
KEA 3160UEMC	KEA 3160UEMC Y/R	160 A	160 A	160 A	90 kW	100 A	90 kW	...315514	...315552	A3	2xM40	3.5		
Sheet steel enclosures														
KET 3160/EMC	KET 3160/EMC Y/R	160 A	160 A	160 A	90 kW	100 A	90 kW	...336649	...338735	TR02	*	8.1		
KET 3200/EMC	KET 3200/EMC Y/R	200 A	200 A	200 A	110 kW	200 A	160 kW	...336656	...338742	TR03	*	19		
KET 3250/EMC	KET 3250/EMC Y/R	250 A	250 A	250 A	132 kW	250 A	250 kW	...336663	...338759	TR03	*	19		
KET 3315/EMC	KET 3315/EMC Y/R	315 A	315 A	315 A	160 kW	315 A	315 kW	...336670	...338776	TR03	*	20		
KET 3400/EMC	KET 3400/EMC Y/R	400 A	400 A	400 A	200 kW	400 A	355 kW	...336687	...338773	TR04	*	20		
KET 3630/EMC	KET 3630/EMC Y/R	630 A	630 A	630 A	355 kW	500 A	500 kW	...336694	...338780	TR04	*	39		

* 160-630 A cable glands according to order

Data subject to change without notice

Dalroad are authorised UK distributors of Katko safety switches and isolators. Contact Dalroad for further information on the Katko range on 01582 505 252 or email sales@dalroad.com.